

Progressive lubrication systems

Product catalogue



SKF

Type: Controller
 Model: EOT-2
 Order No: 666-28186-7
 Voltage: 12/24 V DC
 Capacity: 5 A

SKF Lubrication
 Systems Germany GmbH
 Postfach 1228
 DE-69163 Waldbrunn

CE

Lubricating time 1: 8 - 120 seconds
 Increment 1: 8 - 95 - 24 - 120 seconds
 Increment 2: 2 - 4 - 8 - 20 minutes

Pause time 1: 4 - 60 minutes
 Pause time 2: 1 - 18 hours
 Increment 1: 4 - 8 - 12 - 60 minutes
 Increment 2: 1 - 2 - 3 - 15 hours

Circuit diagram

1624 V DC

Table of contents

| | | | |
|--|----------|---|------------|
| Two leading brands | 4 | Overview of metering devices | 79 |
| Lubricants suitable for lubrication systems | 5 | SSVM | 80 |
| System description | 6 | SSVD | 82 |
| Applications | 7 | SSVDL | 84 |
| Overview of pumps and pump units | 9 | SPVS | 86 |
| P 205 | 12 | VPB | 88 |
| P 203 | 14 | SSV | 90 |
| P 223/P 233 | 16 | SSVL | 92 |
| KFG | 18 | VPK | 94 |
| KFA | 20 | VP | 96 |
| QLS 311 SSV | 22 | PSG1 | 98 |
| QLS 301 SSV | 24 | PSG2 | 100 |
| QLS 401 SSV | 26 | PSG3 | 102 |
| QLS 401 SSVDV | 28 | UV | 104 |
| QLS 421 SSV | 30 | MC ² -HP | 106 |
| P 502 | 32 | XL | 108 |
| P 603M | 34 | Overview of control units | 111 |
| P 623M | 36 | LMC 101 | 112 |
| P 653M | 38 | LMC 2 | 113 |
| ZPU 01/02 | 40 | LMC 301 | 114 |
| EDL1 | 42 | EOT-2 | 116 |
| E-PUMP | 44 | IG 502-2E + | 117 |
| PPU-5/PPU-35 | 46 | LC 502 | 118 |
| 87214 | 48 | IGZ / EXZT | 120 |
| 87200/87216/130179 | 50 | ST-102 | 122 |
| PP/PPG | 52 | ST-1240-GRAPH-4 | 123 |
| PFP-23-2/PFP-23-22 | 54 | ST-2240-LUB | 124 |
| MPB | 56 | LRM 2 | 126 |
| 87212 | 58 | Overview of monitoring devices | 129 |
| 87202 | 60 | HCC | 130 |
| PHU-5/PHU-35 | 62 | SmartPlug lubrication control | 132 |
| PFH-23-2/PFH-23-22 | 64 | Universal piston detector | 133 |
| MCLP | 66 | SP/SFE30 | 134 |
| HP/HPG | 68 | EWT2A | 135 |
| HP-500W/HP-500W-SSV | 70 | 234-11145-3/4/5/9 | 136 |
| PF-VPBM/169-000-146 | 72 | 234-10825-8 | 137 |
| HJ 2 | 74 | Index | 138 |
| PF-23-2/PF-23-22 | 76 | | |

Navigation

Introduction 2

Pumps and pump units 9

Metering devices 79

Control units. 111

Monitoring devices. 129

Two leading brands




One global leader

SKF and Lincoln have joined forces to provide you with the world's most complete portfolio of innovative lubrication solutions – from manual lubricators and tools, to the most advanced centralized and automatic lubrication systems available.

In addition to traditional lubrication products and systems, we offer customized solutions for many industries such as pulp and paper, steel, mining, agriculture, marine, rail, wind, construction, machine tool and automotive. SKF engineering and technical specialists partner with OEMs and end-users to develop system solutions based on customer requirements. We also offer a variety of control and monitoring equipment for ease of use and to help ensure proper lubrication.

Both SKF and Lincoln systems are available through our global network of lubrication experts, offering you world-class installation and ongoing support on a local level – today and into the future. With the power of this network, and more than 200 years of combined friction management experience, we can help you improve machine reliability, reduce maintenance, increase productivity, enhance safety and optimise manpower resources.

Lubricants suitable for lubrication systems

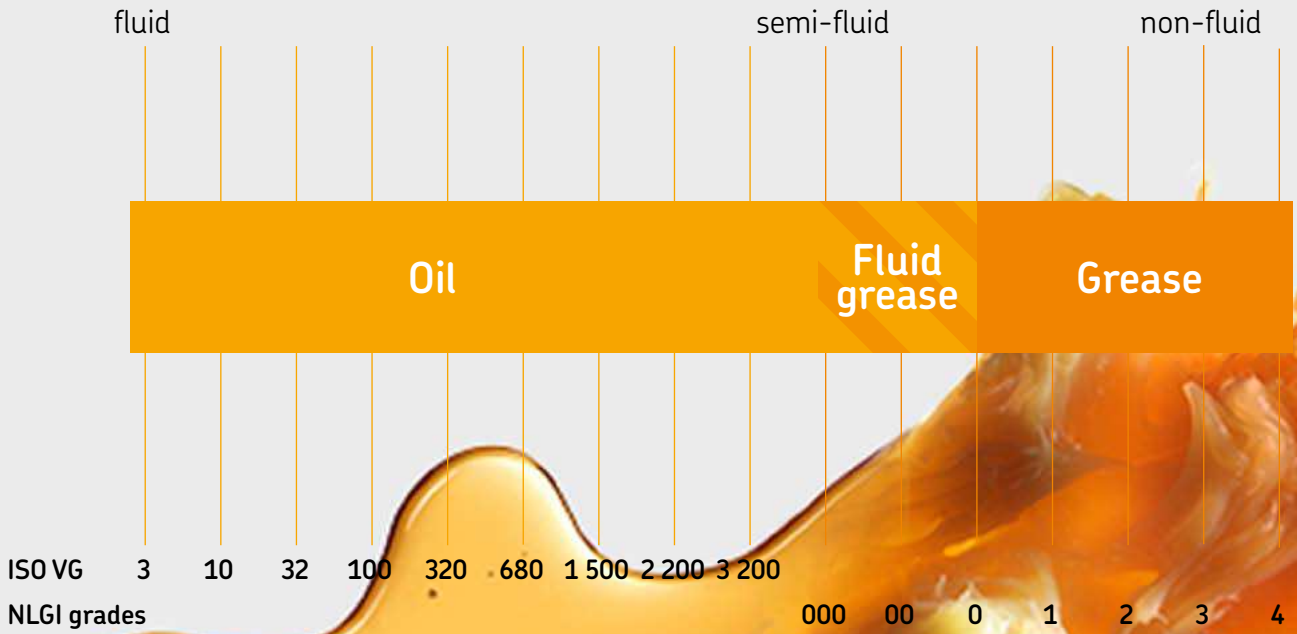

Oil and fluid grease

The viscosity is an expression of a fluid's internal friction. Oils are classified in ISO VG viscosity classes from 2 to 3 200. NLGI grade 000, 00 and 0 greases are called fluid greases. Different types of oils are available, including mineral oils, organic oils and synthetic oils. A compatibility check is recommended prior to using any oil with SKF lubrication systems.




Grease

Greases are consistent lubricants (NLGI grade 1–6). They are soft to hard, triple-component mixtures of a base oil as the lubricating fluid, a thickening agent and additives. In most instances, greases of NLGI grade 1 up to 3 are suitable for use in a lubrication system. A compatibility check should be made prior to using any grease with SKF lubrication systems.



System video

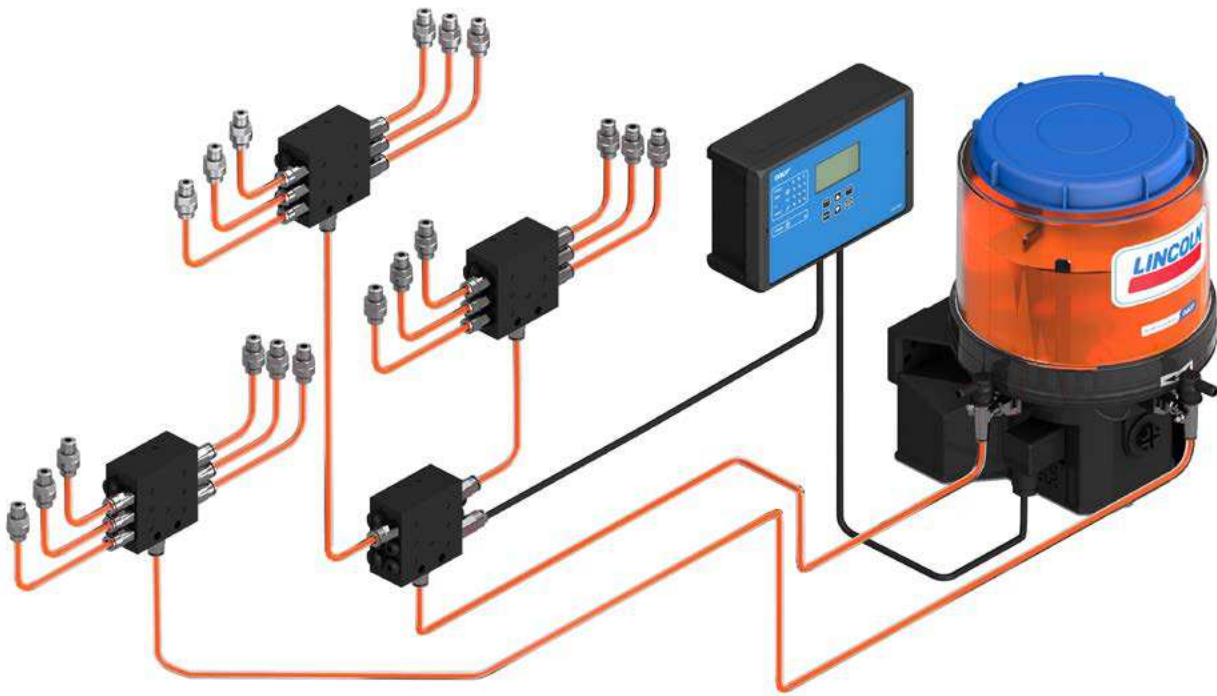

System description

SKF progressive systems, SKF ProFlex and Lincoln Quicklub, can be used on small- to medium sized machines with dispersed lubrication points that require varying lubrication quantities.

Progressive systems consist of a pump connected to at least one primary metering device. If needed, second level metering devices can be connected to the outlets of the primary metering device to increase the number of lubricated points, depending on operating pressure of the pump. The outlets of the primary and second level metering devices are connected via branch lines to the lubrication points of the machine. A third level of metering devices is not recommended. The pump supplies lubricant to the metering devices with pressure up to 550 bar (8 000 psi), depending on the pump model.

The metering devices split the lubricant into even or predefined amounts of lubricant, depending on metering device, that are positively displaced to the lubrication points or to the inlet of a connected secondary metering device. The lubricant amount provided by each outlet of the metering device depends on the type of metering device being used. SKF offers progressive systems that can dispense a precise, metered amount of lubricant to up to 150 lubrication points over distances of approximately 15 m (16 yd), depending on case values. For oil applications, even in connection with flow limiters we can cover distances over 100 m (110 yd), see also SKF Lincoln lubrication solutions portfolio brochure.

Oil Circulation Systems. SKF progressive systems provide continuous lubrication as long as the pump is in operation. Once the pump stops, the pistons of the progressive metering device will stop in their current positions. When the pump starts supplying lubricant again, the pistons will carry on where they left. Therefore, the progressive circuit of one outlet of the pump will stop when only one lubrication point is blocked. The blockage serves as a means of control and forces personnel to service the system. Only one outlet of a primary or a secondary metering device of one pump outlet can be monitored visually or electrically, depending on the chosen metering device.

For planning a lubrication system, conditions the system will be used in need to be determined first. The number of lube points, back pressures at the lube points, operating temperature range, lubricant, the feed pump's drive energy, control and monitoring etc. need to be defined correctly. Attention to information on bearing or lube point information need to be paid too. The sum of all the quantities metered out by the system's metering devices needs to be completed by safety margin and expansion and compressibility loss. SKF application engineers as well as SKF sales partners and distributors are experts in systems laying out lubrication according to all these specifications. A lubrication system laid out by SKF and partners ensures the supply of the correct amount of lubricant at the best time to lubricate. This reduces wear and it avoids pollution caused by over-lubrication.



Applications

The systems are suitable for a variety of applications including: construction machines (concrete pumps, mortar pumps, loaders, excavators, trenchers); on-road trucks (snow removal, waste press); buses; agricultural machines (harvesters, balers, manure spreaders, sugar cane loaders); wood reclaimers; and material handling (reach stackers, crane carts). In addition, progressive lubrication systems are suitable for use in asphalt mixing plants, wind turbine generators and food and beverage facilities (fillers, washing machines), reciprocating compressors in the Oil and Gas industry, among many others.

SKF progressive systems are reliable and operate effectively in harsh conditions (inclusive ATEX) with potentially high lubrication-point back pressure, dirty, wet or humid environments and low temperatures.



Overview of pumps and pump units

| Electrically operated pump units | | | | | | | | | | |
|----------------------------------|--|--------------------|---------|----------------------|----------------------|----------------|------------|-------------------------------|-------|------|
| Product | Function principle | Lubricant | | Metering quantity | | Reser- voir | | Operating pressure max. | | Page |
| | | oil | grease | per pump element | | l | gal | bar | psi | |
| | | mm ² /s | NLGI | cm ³ /min | in ³ /min | | | | | |
| P 205 | Piston pump unit | 40–1 500 | up to 2 | 0,23–40,25 | 0.014–2.45 | 5–30 | 1.32–7.9 | 350 | 5 075 | 12 |
| P 203 | Piston pump unit | 40–1 500 | up to 2 | 0,7–4,0 | 0.042–0.244 | 2–15 | 0.53–4.0 | 350 | 5 075 | 14 |
| P 223/P 233 | Piston pump unit | 40–1 500 | up to 2 | 0,7–4,0 | 0.042–0.244 | 2–15 | 0.53–4.0 | 350 | 5 075 | 16 |
| KFG | Piston pump unit | – | up to 2 | 0,8–5,0 | 0.049–0.305 | 2–20 | 0.53–5.28 | 300 | 4 350 | 18 |
| KFA | Piston pump unit | – | up to 2 | 1,0–2,0 | 0.061–0.122 | 1 | 0.26 | 300 | 4 350 | 20 |
| QLS 311 SSV | Piston pump unit with metering device | 40–1 500 | – | 1,0 | 0.03 | 1; 2 | 0.26; 0.53 | 80 | 1 200 | 22 |
| QLS 301 SSV | Piston pump unit with metering device | – | up to 2 | 1,0 | 0.06 | 1 | 0.26 | 205 | 3 000 | 24 |
| QLS 401 SSV | Piston pump unit with metering device | – | up to 2 | 1,0 | 0.06 | 1–2 | 0.26–0.53 | 205 | 3 000 | 26 |
| QLS 401 SSV DV | Piston pump unit with metering device | – | up to 2 | 1,0 | 0.06 | 1–2 | 0.26–0.53 | 205 | 3 000 | 28 |
| QLS 421 SSV | Piston pump unit with metering device | – | up to 2 | 1,0 | 0.06 | 1–2 | 0.26–0.53 | 205 | 3 000 | 30 |
| P 502 | Piston pump unit | – | up to 2 | 1,0–2,4 | 0.06–0.15 | 1 | 0.26 | 270 | 4 000 | 32 |
| P 603 M | Piston pump unit | – | up to 2 | 4,0–12,0 | 0.24–0.73 | 4–20 | 1.05–5.28 | 350 | 5 075 | 34 |
| P 623 M | Piston pump unit | – | up to 2 | 4,0–12,0 | 0.24–0.73 | 4–20 | 1.05–5.28 | 300 | 4 351 | 36 |
| P 653 M | Piston pump unit | – | up to 2 | 8,0–24,0 | 0.48–1.46 | 4–20 | 1.05–5.28 | 350 | 5 075 | 38 |
| ZPU 01/02 | Piston pump unit | 20–1 500 | up to 3 | 13,3–53,3 | 0.83–3.25 | 10–30 | 2–8 | 350 | 5 075 | 40 |
| EDL 1 | Pressure booster pump | – | up to 2 | 0,5–1,0 | 0.03–0.06 | – | – | 280 | 4 015 | 42 |
| | | | | cm ³ /min | in ³ /min | kg | lb | bar | psi | |
| E-PUMP | Barrel pump unit | 40–1 000 | up to 2 | 55 | 3.35 | 18–180 | 18–180 | 240 | 3 480 | 44 |

| Air operated pump units | | | | | | | | | | |
|-------------------------|--------------------|--------------------|---------|-------------------------|-------------------------|-------------|--------------|-------------------------------|-------|------|
| Product | Function principle | Lubricant | | Metering quantity | | Reservoir | | Operating pressure max. | | Page |
| | | oil | grease | cm ³ /stroke | in ³ /stroke | l | gal | bar | psi | |
| | | mm ² /s | NLGI | | | | | | | |
| PPU-5 | Piston pump unit | 40–1 500 | up to 2 | 0,10–0,50 | 0.006–0.030 | 2,5; 5,0 | 0.66; 1.32 | 160 | 2 320 | 46 |
| PPU-35 | Piston pump unit | 40–1 500 | up to 2 | 0,70–3,50 | 0.042–0.210 | 2,5; 5,0 | 0.66; 1.32 | 160 | 2 320 | 46 |
| 87 214 | Piston pump | 40–1 500 | up to 2 | 0,164–0,980 | 0.010–0.060 | – | – | 14 | 200 | 48 |
| 87 216 | Piston pump | 40–1 500 | up to 2 | 0,010–0,050 | 0.010–0.050 | – | – | – | – | 50 |
| 87 200 | Piston pump | 40–1 500 | up to 2 | 0,041–0,164 | 0.025–0.100 | – | – | – | – | |
| PPG | Piston pump unit | – | up to 2 | 0,2 | 0.012 | 0,4; 1,5 | 0.1; 0.4 | 300 | 4 350 | 52 |
| PP | Piston pump unit | – | up to 2 | 2,6 | 0.158 | 1,5 | 0.4 | 300 | 4 350 | 52 |
| PPF-23-22 | Piston pump unit | – | up to 2 | 1,25 /port | 0.076 /port | 1,5 | 0.4 | 190 | 2 755 | 54 |
| PPF-23-2 | Piston pump unit | – | up to 2 | 2,50 /port | 0.150 /port | 1,5 | 0.4 | 190 | 2 755 | 54 |
| MPB | Barrel pump unit | 20–10 000 | up to 2 | 6,1 | 0.37 | 18, 50, 180 | 40, 120, 400 | 300 | 4 350 | 56 |



SKF



LINCOLN

Overview of progressive pump units

Hydraulically operated pumps and pump units

| Product | Function principle | Lubricant | grease | Metering quantity | | Reservoir | | Operating pressure max. | | Page |
|------------------|--------------------|--------------------|---------|-------------------------|-------------------------|-----------|------------|-------------------------|-------|------|
| | | oil | | cm ³ /stroke | in ³ /stroke | l | gal | bar | psi | |
| | | mm ² /s | NLGI | | | | | | | |
| 87 212 | Piston pump (unit) | 40–1 500 | up to 2 | 0,164–0,98 | 0.01–0.06 | – | – | 68 | 1 000 | 58 |
| 87 202 | Piston pump (unit) | 40–1 500 | up to 2 | 0,41–1,64 | 0.025–0.10 | – | – | 138 | 2 000 | 60 |
| PHU-5 | Piston pump unit | 40–1 500 | up to 2 | 0,1–0,5 | 0.006–0.030 | 2,5; 5,0 | 0.66; 1.32 | 160 | 2 320 | 62 |
| PHU-35 | Piston pump unit | 40–1 500 | up to 2 | 0,7–3,5 | 0.042–0.210 | 2,5; 5,0 | 0.66; 1.32 | 160 | 2 320 | 62 |
| PFH-23-22 | Piston pump unit | – | up to 2 | 1,25 /port | 0.076 /port | 1,5 | 0.4 | 190 | 2 755 | 64 |
| PFH-23-2 | Piston pump unit | – | up to 2 | 2,50 /port | 0.150 /port | 1,5 | 0.4 | 190 | 2 755 | 64 |

Free shaft-end pump ¹⁾

| Product | Function principle | Lubricant | grease | Pump head | Metering quantity | | Operating pressure max. | | Page |
|-------------|--------------------|--------------------|--------|-----------|-------------------|----------------------|-------------------------|-------|------|
| | | oil | | | mm | cm ³ /min | in ³ /min | bar | |
| | | mm ² /s | NLGI | | | | | | |
| MCLP | Piston pump | 20–1 500 | – | 7 or 10 | 0,44–440 | 0.027–26.91 | 555 | 8 000 | 66 |

Manually operated pumps and pumps units

| Product | Function principle | Lubricant | grease | Metering quantity | | Reservoir | | Operating pressure max. | | Page |
|--------------------|--------------------|--------------------|---------|-------------------------|---------------------------|-----------|---------------|-------------------------|-------|------|
| | | oil | | cm ³ /stroke | in ³ /stroke | l | gal | bar | psi | |
| | | mm ² /s | NLGI | | | | | | | |
| HP / HPG | Piston pump unit | – | up to 2 | 0,2; 1,6 / SSV outlet | 0.012; 0.098 / SSV outlet | 0,4–1,5 l | 0.11–0.4 gal | 250 | 3 625 | 68 |
| HP-500-SSV | Piston pump unit | – | up to 2 | 0,2 /SSV outlet | 0.012 /SSV outlet | 0,4–0,5 l | 0.11–0.13 gal | 400 | 5 800 | 70 |
| HP-500W | Piston pump unit | – | up to 2 | 1,5 | 0.09 | 0,4–0,5 l | 0.11–0.13 gal | 400 | 5 800 | 70 |
| 169-000-146 | Piston pump unit | – | up to 2 | 0,2; 2,0 / VPBM outlet | 0.012; 0.12 / VPBM outlet | 0,4 | 0.11 | 400 | 5 800 | 72 |
| PF-VPBM | Piston pump unit | – | up to 2 | 2,0 | 0.12 | 0,4 | 0.11 | 400 | 5 800 | 72 |
| HJ 2 | Piston pump unit | 150–1 500 | up to 2 | 1–2 | 0.06–0.12 | 3 l | 0.79 | 300 | 4 350 | 74 |
| PF-23-22 | Piston pump unit | – | up to 2 | 1,25 | 0.076 | 1,5 l | 0.4 | 100 | 1 450 | 76 |
| PF-23-2 | Piston pump unit | – | up to 2 | 2,5 | 0.15 | 1,5 l | 0.4 | 100 | 1 450 | 76 |

Pump unit

P 205



Product description

The P 205 high-pressure, multi-line pump can supply lubricant directly to lubrication points or can be used as a centralized lubrication pump in large-sized progressive systems. It can drive up to five elements, which are available in varying sizes for optimum adjustability. The pump's drive and eccentric shaft design, high-efficiency worm gear, minimal number of parts and multi-range motor provide several advantages. P 205 pumps are available with a three-phase flange mount and multi-range motor or with a free shaft end for use with other motors. Various gear ratios and reservoir sizes with or without level control are offered.

Features and benefits

- Durable, versatile and reliable pump series
- Suitable for grease or oil
- Designed for continual lubrication of machines and systems operating in harsh environments
- Broad range of output options
- Modular design and easy maintenance

Applications

- Stationary machines with a high lubricant consumption
- Turbines in hydro-electric power plants
- Needling machines
- Screens and crushers in quarries
- Material handling equipment

Technical data

| | |
|-------------------------|---|
| Function principle | electrically operated piston pump |
| Metering quantity | oil: 0,23–40,25 cm ³ /min 0,014–2,45 in ³ /min grease: 0,23–28,75 cm ³ /min 0,014–1,75 in ³ /min |
| Outlets | 1 to 5 |
| Lubricant | oil: viscosity 40–1 500 mm ² /s grease: up to NLGI 2 |
| Operating pressure | max. 350 bar, 5 075 psi |
| Operating temperature | –20 to +40 °C, –4 to +104 °F |
| Protection class | IP 55 |
| Materials | steel plate or plastic, depending on reservoir |
| Reservoir ¹⁾ | plastic: 4 and 8 kg, 8,8 and 17,6 lb steel: 5, 10 and 30 kg; 11; 22 and 66 lb |
| Line connection | G 1/4 |
| Drive speed main shaft | grease: 25 min ⁻¹ , oil: 35 min ⁻¹ |
| Electrical connections | 380–420 V AC/50 Hz, 440–480 V AC/60 Hz 500 V AC/50Hz |
| Dimensions | depending on the model min. 406 × 280 × 230 mm max. 507 × 365 × 300 mm min. 160 × 110 × 91 in max. 200 × 144 × 118 in |
| Mounting position | vertical |
| Options | several different level switches; ATEX versions |

¹⁾ valid for $\rho=1 \text{ kg/dm}^3$



NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:

13651

Pump unit

P 205

Identification code: **P 205** - - - - -

Product series

Drive
 M = AC flange gear motor
 F = free shaft end

Gear ratio
 280 = 280:1
 700 = 700:1
 070 = 70:1

Reservoir
 4 = plastic, 4 l, 1.05 gal
 8 = plastic, 8 l, 2.11 gal
 5 = steel plate, 5 l, 1.32 gal
 10 = steel plate, 10 l, 2.64 gal
 30 = steel plate, 30 l, 7.93 gal

Reservoir design
 N = without level control
 XY = for grease and oil
 XL = for grease with low level control
 BU = with level control (ultrasonic sensor for two switching points, low- and high-level)

Pump elements; define max. 5 elements (f.i. 4 elements K6 = 4K6, ...)
 K 5 = piston ø 5 mm, output per stroke: 0,11 cm³, 0.0067 in³
 K 6 = piston ø 6 mm, output per stroke: 0,16 cm³, 0.0098 in³
 K 7 = piston ø 6 mm, output per stroke: 0,23 cm³, 0.014 in³
 KR = adjustable output, piston ø 7 mm, output per stroke: 0,04-0,18 cm³, 0.0024-0.011 in³

Supplements to motor designation
 320 - 420, 440 - 480 = multi-range motor for nominal supply voltage, 380-420 V AC/50 Hz, 440-480 V AC/60 Hz
 500 = single-range motor for nominal supply voltage, 500 V/50 Hz
 000 = pump without motor, with coupling flange

P205 pump elements

| Order number | Description | Metering quantity | |
|--------------|--------------------------------|-------------------------|-------------------------|
| | | cm ³ /stroke | in ³ /stroke |
| 600-27464-2 | pump element K 5 | 0,11 | 0.0067 |
| 600-26876-2 | pump element K 6 | 0,16 | 0.0098 |
| 600-26877-2 | pump element K 7 | 0,23 | 0.014 |
| 655-28716-1 | adjustable pump element KR (7) | 0,04-0,18 | 0.0024-0.011 |
| 303-19285-1 | closing screw ¹⁾ | | |

¹⁾ for outlet port instead of a pump element

Pressure-relief valve and filling connectors

| Order number | Description |
|--------------|--|
| 624-29056-1 | pressure-relief valve, 350 bar, G 1/4 D 6 for tube ø 6 mm OD |
| 624-29054-1 | pressure-relief valve, 350 bar, G 1/4 D 8 for tube ø 8 mm OD |
| 304-17571-1 | filling connector G 1/4 female ¹⁾ |
| 304-17574-1 | filling connector G 1/2 female ¹⁾ |

¹⁾ filling connector fits for vacant outlet ports

Pump unit

P 203



Description

The P 203 lubrication pump is versatile, compact and economical and can supply up to 150 lubrication points, depending on the line length. It consists of a housing with integrated motor, reservoir with stirring paddle, pump element with pressure-relief valve, filling nipple and electrical connection parts. This powerful pump can drive up to three pump elements and can be equipped with a low-level control (with or without control board).

Features and benefits

- Optional control printed circuit boards with different operating settings
- Range of reservoir types offered
- For DC or AC applications
- Variety of pumping elements for different output available

Applications

- Mobile applications
- Wheel loaders
- Excavators
- Small- and medium-sized machinery
- General industries
- Combines, balers, forage harvesters



Technical data

| | |
|-----------------------|--|
| Function principle | electrically operated piston pump |
| Operating temperature | |
| V DC: | -40 to +70 °C; -40 to +158 °F |
| V AC: | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 350 bar; 5 075 psi |
| Lubricant | grease: up to NLGI 2 oil: viscosity 40–1 500 mm ² /s |
| Outlets | up to 3 |
| Metering quantity | depending on pump element: 0,7–4,0 cm ³ /min per outlet 0,042–0,244 in ³ /min per outlet |
| Reservoir | 2; 4; 8; 11 and 15 l 0,53, 1,05, 2,11; 2,09 and 3,96 gal |
| Connection main line | G 1/4 |
| Operating voltage | 12/24 V DC, 110–260 V AC; 50/60 Hz |
| Dimensions | min. 211 × 224 × 287 mm max. 211 × 250 × 774 mm min. 8.31 × 8.82 × 11.29 in max. 8.31 × 9.84 × 30.47 in |
| Protection class | IP6K9K |
| Mounting position | upright, with follower plate any |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12401 EN

Pump unit

P 223/P 233



Description

Similar to the P 203 series, the P 223/233 pumps feature an integrated control printed circuit board (P.C.B.) with metering device monitoring and can drive up to three pump elements. The P 233 provides supplementary Datalogger function for data transfer to Quickdata 2.0 diagnostic software. Versatile, compact and economical, the P 233 pump is enhanced with low-level control, printed circuit board MDF01/02 with attached Datalogger module and a keypad with display.

Features and benefits

- Datalogger P 233 shows system settings and events including general data, pumping times, programming, operating times, malfunction and low-level indication
- Using Quickdata 2.0 diagnostic software, data can be read out via laptop and infrared interface

Applications

- Mobile applications
- Track tamping machines
- Stationary systems
- Vehicles and construction machines

Technical data

| | |
|------------------------|--|
| Function principle | electrically operated piston pump |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 350 bar; 5 075 psi |
| Lubricant | grease: up to NLGI 2 oil: viscosity 40–1 500 mm ² /s |
| Outlets | up to 3 |
| Metering quantity | depending on pump element; per outlet: 0,7–4,0 cm ³ /min; 0,042–0,24 in ³ /min |
| Reservoir | 2, 4, 8, and 15 l; 0,53, 1,05, 2,11 and 3,96 gal |
| Connection main line | G1/4 |
| Operating voltage | 12/24 V DC; 110/240 V AC (±10%); 50/60 Hz |
| Protection class | IP 6K9K |
| Dimensions | min. 230 × 224 × 367 mm max. 230 × 250 × 729 mm min. 9.06 × 8.82 × 14.45 in max. 9.06 × 9.84 × 28.70 in |
| Mounting position | any |
| with follower plate | upright |
| without follower plate | |

Pump unit

KFG



Description

The electrically operated KFG pump includes a drive shaft with an eccentric that drives up to three pump elements. It is comprised of four main components: housing with pump elements, reservoir with fill-level monitoring, internal control units and attachments. The pump is available in eight sizes and two variants for stationary use or with grease follower plate technology for utilization in any position. A variety of attachments permit reservoir filling, protect the pump (pressure-limitation valve) or enable the uncomplicated connection of the pump to a centralized lubrication system.

Features and benefits

- Durable and reliable components designed for extreme conditions (with positively driven pump elements)
- Versatile; can be used with single-line and progressive systems
- Fill-level and lubrication system monitoring
- Pin code protection of control unit available

Applications

- On- and off-road vehicles
- Renewable energy



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12649 EN; 951-170-211; 951-170-212; 951-170-213



3D

skf-lubrication.partcommunity.com/3d-cad-models

Technical data

| | |
|--|--|
| Function principle | electrically operated piston pump |
| Operating temperature | -30 to +70 °C; -22 to +158 °F depending on type of pump element |
| Operating pressure | 200 to 300 bar; 2 900 to 4 350 psi depending on type and size of pump element |
| Lubricant | grease NLGI 000 to 2, compatible with plastics, NBR elastomers, copper and copper alloys |
| Outlets | up to 3 |
| Metering quantity | per pump element: 0,8; 1,3; 1,8; 2,5; 5,0 cm ³ /min 0.049, 0.079, 0.11, 0.15, 0.31 in ³ /min |
| Reservoir | 2; 4; 6; 8; 10; 12; 15 and 20 kg 4.4, 8.8, 13.2, 17.6, 22, 26.5, 33 and 44 lbs |
| Material | aluminum-silicon cast alloy, PMMA, PA 6I |
| Connection | outlet pump element: M 14 × 1,5 female thread |
| Power supply | 12 V DC, 24 V DC, 230 or 90 to 264 V AC; (± 10%) |
| Dimensions | min. 266 × 208 × 229 mm max. 268 × 227 × 1,170 mm min. 10.47 × 8.19 × 9.01 in max. 10.55 × 8.93 × 46.06 in |
| Protection class | IP56 |
| Mounting position with follower plate | any, installation possible also in rotating machines, e.g. wind turbines |
| without follower plate | upright |

Pump unit

KFA



Description

KFA series pumps include a maximum of two outlet ports to connect two independent lubrication circuits. A separate pump element is required for each outlet. Three pump elements with different delivery rates are available so that the volume of grease can be adjusted to individual circuit needs. This ensures that every lubrication point is supplied with an adequate amount of grease in each lubrication cycle. Model KFAS has an integrated IG502-2-1 control and monitoring unit that operates in a time- or load- (pulse) dependent mode, with or without monitoring..

Features and benefits

Integrated control system provides:

- Non-volatile memory with PIN-code protection
- Storage of residual interval, lubricating cycle and faults signals
- Saved data in event of a power failure
- Connection for external pushbutton and inductive cycle switch
- Interval and contact times can be set independently
- Fits in tight/small places

Applications

- Commercial vehicles
- Machine tools
- Printing industry



Technical data

| | |
|-----------------------|--|
| Function principle | electrically operated piston pump |
| Operating temperature | -25 to +75 °C -13 to +167 °F |
| Operating pressure | 300 bar; 4 350 psi |
| Lubricant | grease up to NLGI 2 |
| Outlets | 1 to 2 |
| Metering quantity | 1,0; 1,5; 2,0 cm ³ /min 0.061; 0.092; 0.122 in ³ /min |
| Reservoir | 1 l; 0.26 gal |
| Connection main line | M14 × 1.5 |
| Operating voltage | 12 and 24 V DC; 115 V AC; (± 10%) |
| Protection class | IP 6K9K |
| Dimensions | 216 × 150 × 234,5 mm 8.1 × 5.9 × 9.2 in |
| Mounting position | upright |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-170-008, 12667-EN

Pump unit

KFA

| KFA pump unit | | | | | | | | | |
|-----------------|--------------------------|------------------|--------------|---------------|------------|----------|---------|----------|--|
| Order number | Designation applications | Monitoring | | Control units | | Voltages | | | |
| | | level monitoring | cycle switch | extern | integrated | 12 V DC | 24 V DC | 115 V AC | |
| KFA1 912 | vehicles | – | – | • | – | • | – | – | |
| KFA1 924 | vehicles | – | – | • | – | – | • | – | |
| KFA1-W 912 | vehicles | • | – | • | – | • | – | – | |
| KFA1-W 924 | vehicles | • | – | • | – | – | • | – | |
| KFAS1 912 | vehicles | – | – | – | • | • | – | – | |
| KFAS1 924 | vehicles | – | – | – | • | – | • | – | |
| KFAS1-W 912 | vehicles | • | – | – | • | • | – | – | |
| KFAS1-W 924 | vehicles | • | – | – | • | – | • | – | |
| KFA1-M 924 | industry | – | – | • | – | – | – | – | |
| KFA1-M-W 924 | industry | • | – | • | – | – | • | – | |
| KFAS1-M 924 | industry | – | – | – | • | – | • | – | |
| KFAS1-M-Z 924 | industry | – | • | – | – | – | • | – | |
| KFAS1-M-W 924 | industry | • | – | – | • | – | • | – | |
| KFAS1-M-W-Z 924 | industry | • | • | – | • | – | • | – | |
| KFAS10 485 | industry | – | – | – | • | – | – | • | |
| KFAS10-W 485 | industry | • | – | – | • | – | – | • | |

¹⁾ only pump; pump elements need to be ordered separately

Accessories

| Cable kits | |
|--------------|---|
| Order number | Designation, applications |
| 997-000-820 | cable kit for pump KFA1, square type, 4-pins (12 m, 39 ft) |
| 997-000-630 | cable kit bayonet for pump KFAS1 and KFAS1-W, 7-pins, (12 m, 39 ft) |
| 997-000-650 | cable kit bayonet for pump KFAS1 and KFAS1-W, 7-pins, (16 m, 52 ft) |

KFA1.U1



KFA pump elements

| Order number | Designation | Metering quantity | |
|--------------|--------------|----------------------|----------------------|
| | | cm ³ /min | in ³ /min |
| KFA1.U1 | pump element | 2,00 | 0.122 |
| KFA1.U2 | pump element | 1,50 | 0.092 |
| KFA1.U3 | pump element | 1,00 | 0.061 |

Pump unit

QLS 311 SSV



Description

The QLS 311 pump is a monitored lubrication system with low-level control for a maximum of 18 lubrication points. Designed for use with standard high-pressure plastic tubing, the QLS family includes pumps with or without mounted SSV metering devices. An optional integrated controller for pause and lubrication times is available.

Features and benefits

- Internal lubricant return possible
- Integrated pressure-relief valves
- External programming via keypad
- System monitoring with display of faults
- Standard low-level control
- Suitable for VAC and V DC versions
- Protection: IP 6K9K, NEMA 4

Applications


- Machine tools
- Metal processing
- Chain lubrication
- Material handling
- Automotive industry
- Food processing
- Printing industry
- Farm machinery

Technical data

| | |
|----------------------------------|---|
| Function principle | electrically operated piston pump |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 80 bar; 1 200 psi |
| Lubricant | oil: 40–1 500 mm ² /s |
| Outlets | up to 18 |
| Metering quantity | 1,0 cm ³ /min; 0,06 in ³ /min |
| Reservoir | 1, 2 l; 0,26; 0,53 gal |
| Connection main line via SSV: | see information for SSV page 86 |
| via connection block: | G 1/8 12/24 V DC; 120 and 230 VAC (± 10%) |
| Protection class | IP 6K9K |
| Dimensions | min. 237 × 215 × 230 mm min. 9.33 × 8.46 × 9.05 in max. 237 × 235 × 353 mm max. 9.33 × 9.25 × 13.89 in |
| Mounting position | upright |

Pump unit

QLS 311 SSV

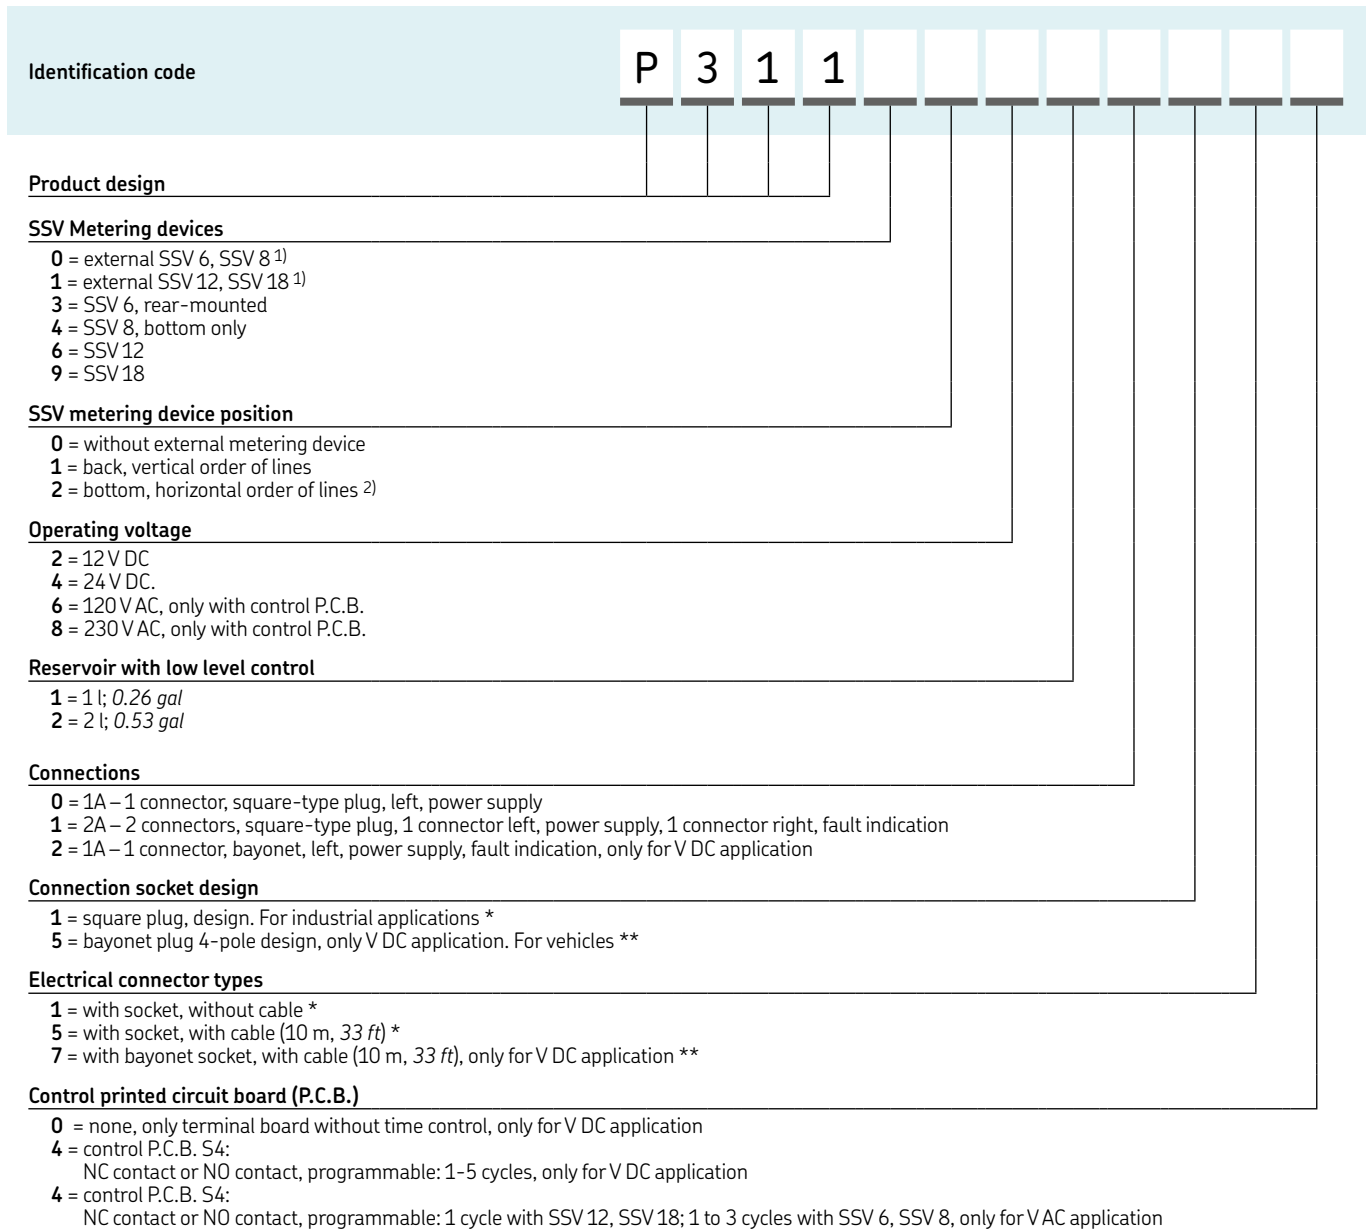

¹⁾ For external metering devices application only use the specific metering devices SSV...KNQLS

²⁾ Do not use QLS 301 with SSV metering device in bottom-mounting position for mobile applications. Do not install the pump in areas exposed to shock.

Pump unit

QLS 301 SSV



Description

The Quicklub QLS 301 is a compact lubrication system designed to supply grease. The system package includes all necessary monitoring and control functions, as well as low-level control and a pressure-relief valve. Outlet connections and standard-pressure plastic tubing must be ordered separately. Up to 18 lubrication points can be supplied and monitored directly from the pump, and its reservoir features a follower plate, enabling rotating applications. The unit's integrated, all-in-one system concept reduces installation time and costs.

Features and benefits

- Back- or bottom-mounted progressive metering devices
- Internal lubricant return possible
- Integrated pressure-relief valve
- External programming via keypad
- System monitoring with display of faults
- Follower plate

Applications

- Machine tools
- Material handling
- Automotive industry
- Food processing
- Printing industry
- Renewable energies
- Farm machinery
- Construction

Technical data

| | |
|---------------------------------|---|
| Function principle | electrically operated piston pump with follower plate |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 205 bar; 2 975 psi |
| Lubricant | |
| grease: | NLGI 2 |
| fluid grease: | NLGI 00, 000 |
| Outlets | up to 18 |
| Metering quantity ¹⁾ | 1,0 cm ³ /min; 0.06 in ³ /min |
| Reservoir | 1 l; 0.26 gal |
| Connection main line via SSV: | see information for SSV |
| via connection block: | G 1/8 |
| Operating voltage | 12/24 V DC; 120 and 230 V AC (± 10%) |
| Protection class | IP 6K9K, NEMA 4 |
| Dimensions | min. 237 × 215 × 230 mm min. 9.33 × 8.46 × 9.05 in max. 237 × 235 × 270 mm max. 9.33 × 9.25 × 10.63 in |
| Mounting position | any |

¹⁾ Before metering devices




NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-171-003 EN

Pump unit

QLS 301 SSV

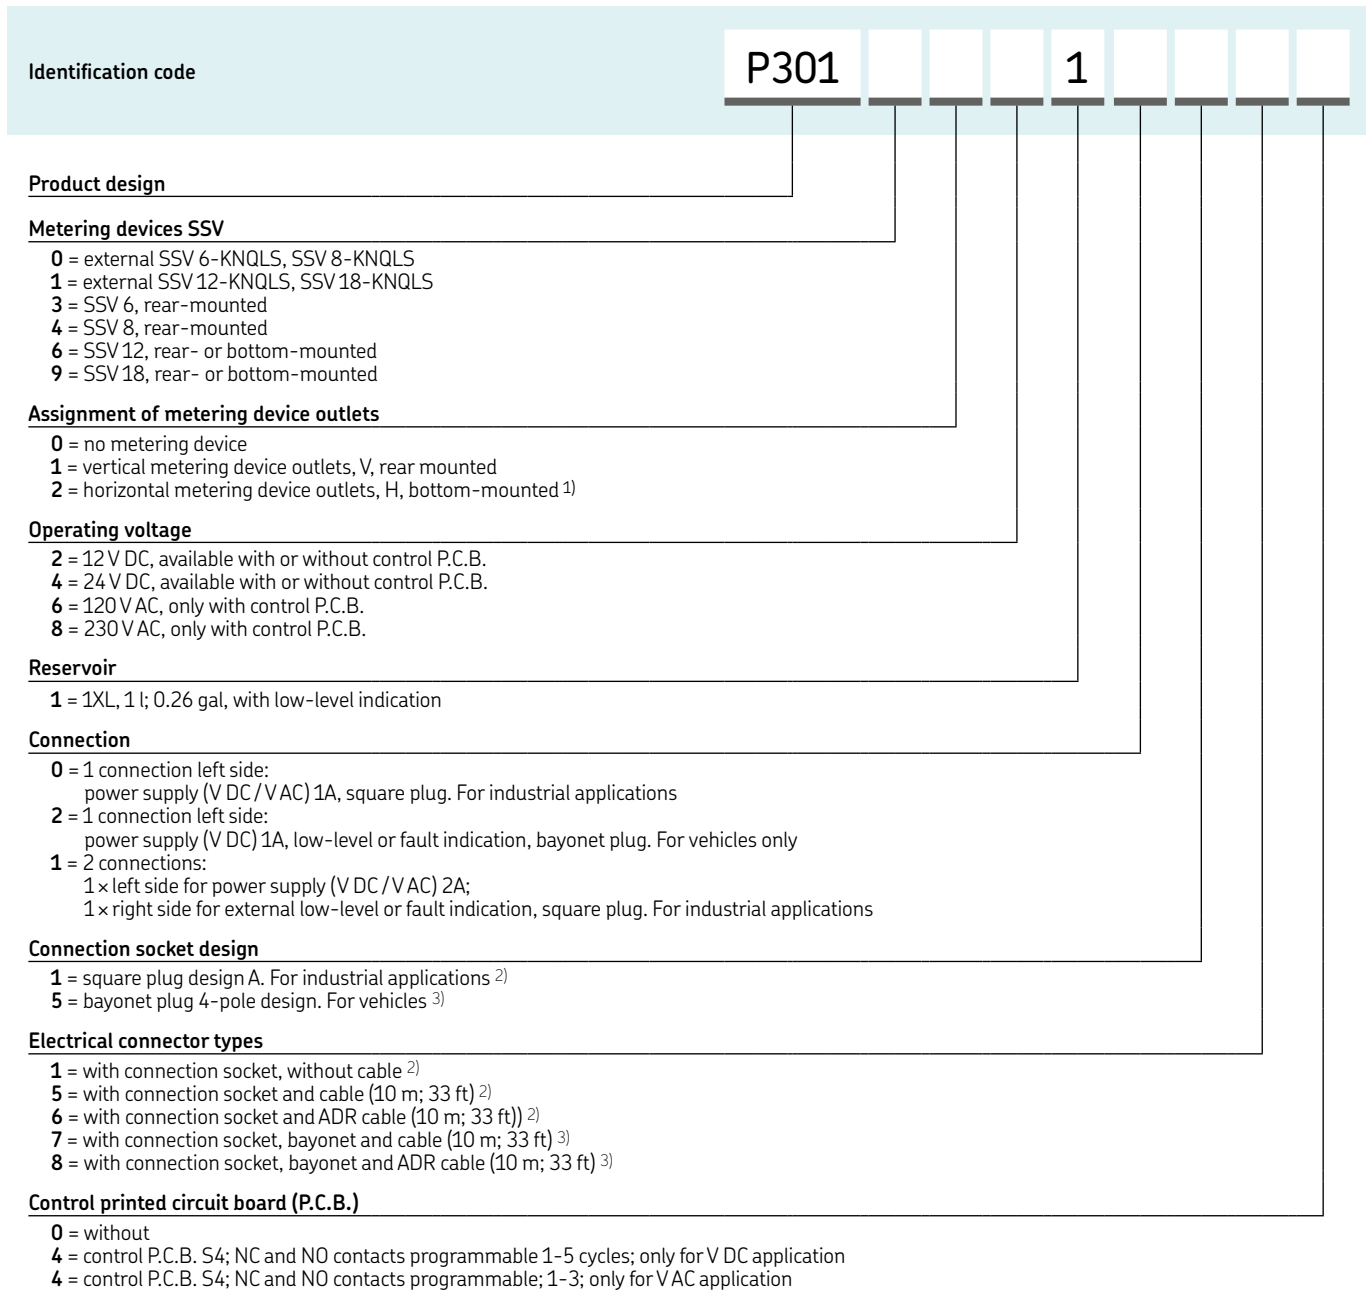

¹⁾ Not for use in areas with impact loads or vehicles

²⁾ Connection types 1, 5, 6 can be combined with square plug version (1) only

³⁾ Connection types 7, 8 can be combined with bayonet plug version (5) only

Pump unit

QLS 401 SSV



Description

The Quicklub QLS 401 SSV is a complete lubrication system that includes all necessary monitoring and control functions, as well as a pressure-relief valve and an enhanced reservoir-stirring paddle that prevents grease separation. Outlet connections and standard-pressure plastic tubing must be ordered separately. Up to 18 lubrication points can be supplied via an SSV metering device with fixed output amount and can be monitored directly from the pump. The unit's integrated, all-in-one system concept reduces installation time and costs.

Features and benefits

- Back- or bottom-mounted metering devices
- Internal lubricant return possible
- Integrated pressure-relief valve
- External programming via keypad
- System monitoring with display of faults

Applications

- Industrial and mobile applications
- Food processing
- Farm machinery
- Machine tools

Technical data

| | |
|---------------------------------|---|
| Function principle | electrically operated piston pump with stirring paddle |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 205 bar; 2 975 psi |
| Lubricant | grease: NLGI 2 fluid grease: NLGI 00, 000 up to 18 |
| Outlets | up to 18 |
| Metering quantity ¹⁾ | 1,0 cm ³ /min; 0.06 in ³ /min |
| Reservoir | 1; 2 l; 0.26; 0.53 gal |
| Connection main line | via SSV: see information for SSV via connection block: G 1/8 |
| Operating voltage | 12/24 V DC; 120 and 230 V AC (± 10%) |
| Protection class | IP 6K9K, NEMA 4 |
| Dimensions | min. 237 × 215 × 230 mm max. 237 × 235 × 353 mm min. 9.33 × 8.46 × 9.05 in max. 9.33 × 9.25 × 13.89 in |
| Mounting position | upright |

¹⁾ Before metering devices



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-171-003 EN

Pump unit

QLS 401 SSV DV



Description

The Quickclub QLS 401 SSV DV is a complete lubrication system that includes all necessary monitoring and control functions, as well as a pressure-relief valve and an enhanced reservoir-stirring paddle that prevents grease separation. Outlet connections and standard-pressure plastic tubing must be ordered separately. Up to 16 lubrication points can be supplied via an SSV DV metering device with adjustable output amount (using metering screws) and can be monitored directly from the pump. The unit's integrated, all-in-one system concept reduces installation time and costs.

Features and benefits

- Back- or bottom-mounted metering devices
- Internal lubricant return possible
- Integrated pressure-relief valve
- External programming via keypad
- System monitoring with display of faults

Applications

- Industrial and mobile applications
- Food processing
- Farm machinery
- Machine tools

Technical data

| | |
|-----------------------|--|
| Function principle | electrically operated piston pump with stirring paddle |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 205 bar; 2 975 psi |
| Lubricant | grease: NLGI 2 fluid grease: NLGI 00, 000 |
| Outlets | max. 16 |
| Metering quantity | depending on metering screw; per outlet: 0,08-0,4 cm ³ /min; 0,0048 -0,0244 in ³ /min 1; 2 l; 0.26; 0.53 gal |
| Reservoir | via SSV: see information for SSV DV via connection block: G 1/8 |
| Operating voltage | 12/24 V DC (± 10%) |
| Protection class | IP 6K9K, NEMA 4 |
| Dimensions | min. 237 × 215 × 230 mm max. 237 × 235 × 353 mm min. 9.33 × 8.46 × 9.05 in max. 9.33 × 9.25 × 13.89 in |
| Mounting position | upright |

NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-171-003 EN, 12667 EN

Pump unit

QLS 421 SSV



Description

Designed for lubricating truck trailers and semi-trailers, the Quicklub QLS 421 is a complete lubrication system with an integrated metering device and controller, as well as a pressure-relief valve. The pump features a back-mounted SSV metering device and supplies grease only. Outlet connections and standard-pressure plastic tubing must be ordered separately. Up to 18 lubrication points can be supplied directly from the pump.

Features and benefits

- Compact progressive system
- Designed to supply grease
- Uses brake light as power supply via capacitor
- Lubricates at each braking until reaching set lubrication time

Applications


- Vehicles
- Trailers, semi-trailers
- Farm machinery
- Construction

Technical data

| | |
|-----------------------|---|
| Function principle | electrically operated piston pump |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 205 bar; 2 975 psi |
| Lubricant | grease: NLGI 2 fluid grease: NLGI 00, 000 |
| Outlets | up to 18 |
| Reservoir | 1; 2 l; 0.26; 0.53 gal |
| Metering quantity | 1,0 cm ³ /min; 0.06 in ³ /min |
| Connection main line | via SSV: see information for SSV via connection block: G 1/8 |
| Operating voltage | 12/24 V DC |
| Protection class | IP 6K9K, NEMA 4 |
| Dimensions | min. 237 × 215 × 230 mm max. 237 × 235 × 353 mm min. 9.33 × 8.46 × 9.05 in max. 9.33 × 9.25 × 13.89 in |
| Mounting position | upright |

Pump unit

QLS 421 SSV

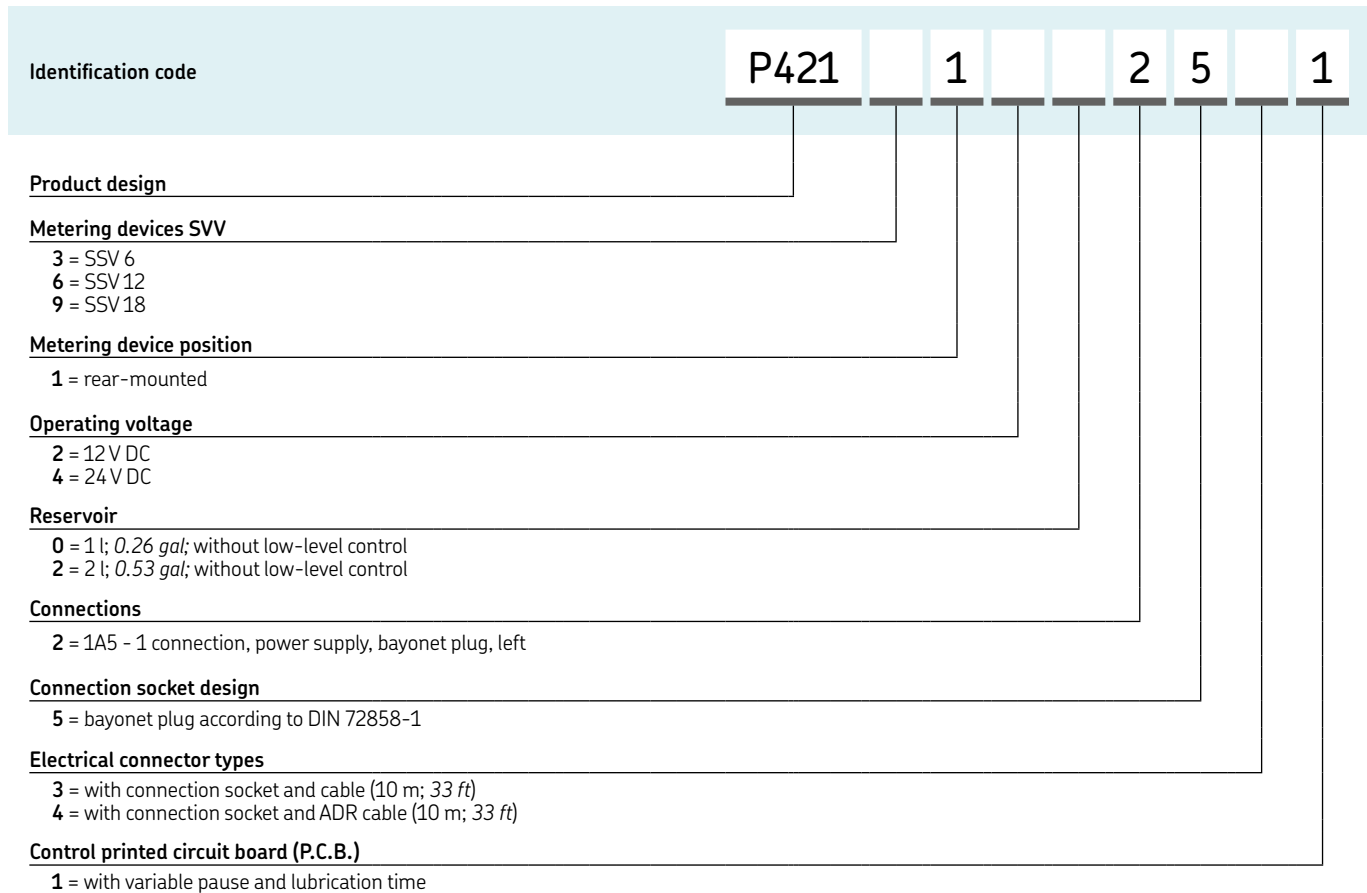

Pump unit

P 502



Description

The P 502 is a simple, economical, electrically operated lubrication pump unit. It can provide directly a maximum of two individual lubrication points with lubricant or be connected to progressive metering devices. An integrated control board is available to set pause and lubrication time. Developed for fluid grease and grease, the P 502 features an optimized housing shape and reservoir suitable for food processing applications.

Features and benefits

- Economical operation
- Fits in tight/small places
- Flexible design for 12 and 24 V DC voltage supply
- Optional pressure-release valve
- Optimised housing design for splash zones in food processing

Applications

- Commercial vehicles
- Farm machinery
- Small construction machines
- Food and beverage industry

Technical data

| | |
|--|---|
| Function principle | electrically operated piston pump |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 270 bar; 3 915 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | 1-2 |
| Metering quantity | depending on pump element per outlet: 1,0-2,4 cm ³ /min; 0.06-0.15 in ³ /min |
| Reservoir | 1 l; 0.26 gal |
| Connection main line | G1/4 |
| Operating voltage | 12/24 V DC |
| Protection class | IP 6K9K; IP65; IP67 depending on type of electrical connection |
| Dimensions | 250 × 150 × 270 mm 9.84 × 5.91 × 10.63 in |
| Mounting position with follower plate | any |
| without follower plate | upright |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12737 EN

Pump unit

P 603 M



Description

The compact P 603 M automatic lubrication pump consists of a housing with integrated motor, reservoir with stirring paddle, pump element with pressure-relief valve, filling nipple and electrical connection parts. It can drive up to three pump elements and operates according to a customer-supplied, external control unit (pause and lubrication times).

Versatile and economical, this pump can be enhanced with low-level control that enables control of lubrication cycles. The P 603 M can supply up to 100 lubrication points, depending on line length.

Features and benefits

- Reservoir size up to 20 l (5.28 gal) available
- Powerful and robust pump
- Drives up to three pump elements
- C5M corrosion protection available
- Pump elements could be internally combined to one outlet

Applications

- Wind energy systems
- Construction
- Renewable energies



Technical data

| | |
|--|--|
| Function principle | electrically operated piston pump |
| Operating temperature | -40 to +70 °C; -40 to +158 °F |
| Operating pressure | 350 bar; 5 075 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | up to 3 pump elements |
| Metering quantity | depending on pump element; 4 cm ³ /min; 0.24 in ³ /min |
| Lubricant output ¹⁾ | max. 12 cm ³ /min; 0.73 in ³ /min |
| Reservoir ²⁾ | 4, 8, 10, 15 and 20 l; 1.05, 2.11, 2.64, 3.96 and 5.28 gal |
| Connection main line | G 1/4 |
| Operating voltage | 100-240 V AC, 50/60 Hz |
| Protection class | IP 6K9K |
| Dimensions | min. 240 × 235 × 415 mm max. 240 × 235 × 591 mm min. 9.45 × 9.25 × 16.34 in max. 9.45 × 9.25 × 23.27 in |
| Mounting position with stirring paddle with follower plate | reservoir upside any |

¹⁾ with internally combined three pump elements to one outlet

²⁾ 30 l, 7.9 gal steel reservoir version available on request



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12735 EN

Pump unit

P 623 M



Description

P 623 M electrically operated pumps have been designed to withstand electromagnetic pulses caused by lightning strikes. An extension of the P603 pump series, the P623 M is for use in progressive automatic lubrication systems. Working closely with customers to develop product solutions that meet specific needs, SKF developed the P623 M for onshore and offshore wind energy applications. In addition, these pump units are suitable for use in construction, mining and renewable energy applications where lightning protection must be considered. P623 M pumps feature a power supply board that transfers 230 V to 24 V (control) with overvoltage protection to discharge 8 kV (electric grounding). The pump units are available with a grease follower plate for rotating applications or a stirring paddle for stationary applications.

Features and benefits

- Reduces operational risk compared to standard automatic lubrication
- Offers higher safety standards
- Brings lubrication system into compliance

Applications

- Wind energy generators
- Construction, mining
- Renewable energies



Technical data

| | |
|---|--|
| Function principle | electrically operated piston pump with lightning protection |
| Operating temperature | -25 to +55 °C; -13 to +131 °F |
| Operating pressure | 300 bar; 4 351 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | up to 3 pump elements |
| Metering quantity | depending on pump element; 4 cm ³ /min; 0.24 in ³ /min |
| Lubricant output ¹⁾ | max. 12 cm ³ /min; 0.73 in ³ /min |
| Reservoir | 4, 8, 10, 15 and 20 l; 1.05, 2.11, 2.64, 3.96 and 5.28 gal |
| Connection main line | G 3/4 |
| Operating voltage | 100-240 V AC, 50/60 Hz |
| Protection class | IP 67 |
| LPZO (Lightning Protection Zone) | 8 kV (acc. EN61000-6-2) |
| EMC (Electromagnetic compatibility) | 2014/30/EU |
| Dimensions | min. 220 × 278 × 439 mm max. 220 × 278 × 976 mm min. 8.66 × 10.94 × 17.28 in max. 8.66 × 10.94 × 38.42 in |
| Mounting positions: with stirring paddle | reservoir upside |
| with follower plate | any |

¹⁾ with internally combined three pump elements to one outlet




NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

16797 EN

Pump unit

P 623 M

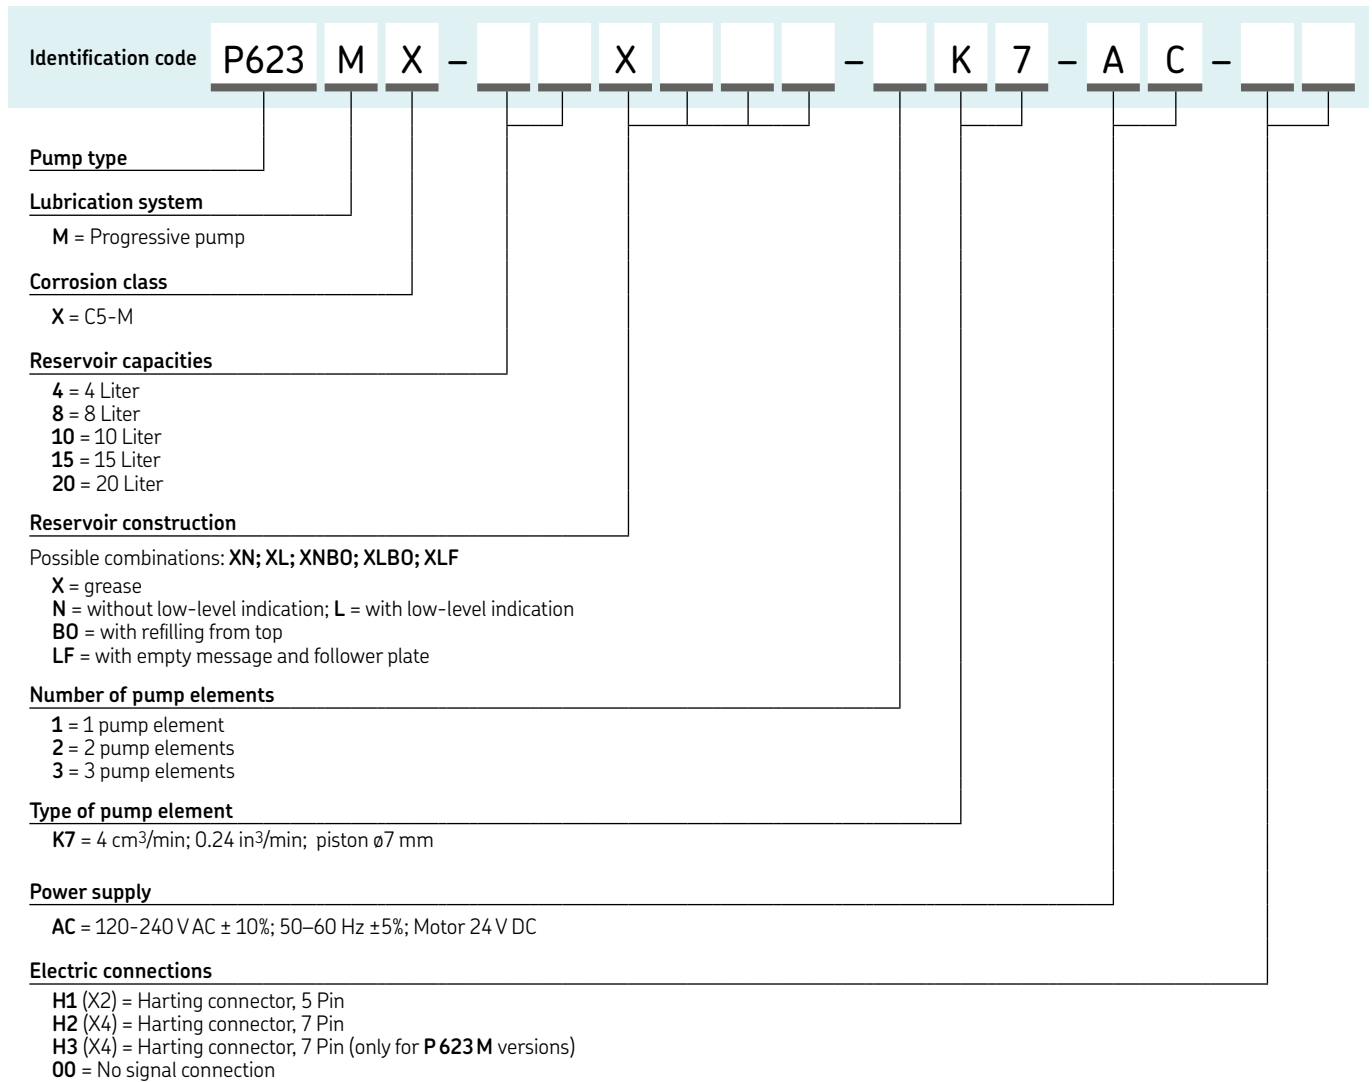

Pump unit

P 653 M



Description

The compact P 653 M automatic lubrication pump consists of a housing with integrated motor, reservoir with stirring paddle, pump element with pressure-relief valve, filling nipple and electrical connection parts. It can drive up to three pump elements and operates according to a customer-supplied, external control unit (pause and lubrication times). Versatile and economical, this pump can be enhanced with low-level control that enables control of lubrication cycles. The P 653 M can supply up to 100 lubrication points, depending on line length.

Features and benefits

- Reservoir size up to 20 l (5.28 gal) available
- Powerful and robust pump
- Drives up to three pump elements
- C5M corrosion protection available
- Pump elements could be internally combined to one outlet

Applications

- Wind energy systems
- Construction
- Renewable energies
- Etc.

Technical data

| | |
|---|--|
| Function principle | electrically operated piston pump |
| Operating temperature | -40 to +70 °C; -40 to +158 °F |
| Operating pressure | 350 bar; 5 075 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | up to 3 pump elements |
| Metering quantity | depending on pump element; 8 cm ³ /min; 0.48 in ³ /min |
| Lubricant output ¹⁾ | max. 24 cm ³ /min; 1.46 in ³ /min |
| Reservoir ²⁾ | 4, 8, 10, 15 and 20 l; 1.05, 2.11, 2.64, 3.96 and 5.28 gal |
| Connection main line | G ³ / ₄ |
| Operating voltage | 90-264 V AC, 50/60 Hz; 24 V DC |
| Protection class | IP 6K 9K |
| Certification | UL, CE |
| Dimensions | min. 240 × 235 × 467 mm max. 240 × 235 × 800 mm min. 9.45 × 9.25 × 18.4 in max. 9.45 × 9.25 × 31 in |
| Mounting positions: with stirring paddle | reservoir upside down |
| with follower plate | any |

¹⁾ with internally combined three pump elements to one outlet

²⁾ 30 l, 7.9 gal steel reservoir version available on request



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

16797 EN

Pump unit

ZPU 01/02



Description

The ZPU 01/02 high-pressure, high-volume pumps can be used as a supply pump for small to midsize dual-line systems or for progressive systems.

Depending on the system layout, these electric pumps can supply lubricant within a 50 m (54 yd) radius at a maximum pressure of 400 bar (5 800 psi). Available with 10 or 30 l (2.6 or 8 gal) reservoirs, these units are compatible with oil and grease up to NLGI 2 (NLGI 3 upon request). Featuring one or two elements, the ZPU 01/02 pumps work effectively in a broad temperature range thanks to the integrated stirring device.

Features and benefits

- Reliable
- Versatile
- Ultrasonic low- and high-level control options
- Free shaft end for use with other motors

Applications

- Light to medium industrial applications
- Mixing machines
- Power plants
- Reclaimers
- Stackers

Technical data

| | |
|---------------------------------|--|
| Function principle | electrically operated piston pump |
| Operating temperature | -20 to +70 °C; -4 to +158 °F |
| Operating pressure | |
| M100; M490 | max. 350 bar; 5 075 psi |
| M049 | max. 400 bar; 5 800 psi |
| Lubricant | grease: NLGI 2, NLGI 3 on request oil: viscosity 20–1 500 mm ² /s at operating temperature |
| Metering quantity ¹⁾ | |
| ZPU01 | 13,33 cm ³ /min; 0.813 in ³ /min |
| ZPU02 | 26,67 cm ³ /min; 1.63 in ³ /min |
| ZPU02-M049 | 53,33 cm ³ /min; 3.25 in ³ /min |
| Reservoir | 10 or 30 l; 2.6 or 8 gal |
| Connection main line | |
| Model V | for tube Ø 10mm |
| Model E | G 1/4 |
| Operating voltage | 380–420 V AC/50 Hz, 440–480 V AC/60 Hz; (± 10%) |
| Protection class | IP 65 |
| Dimensions | min. 514 × 379 × 317 mm max. 754 × 431 × 337 mm min. 20.25 × 15.00 × 12.50 in max. 29.75 × 17.00 × 15.00 in |
| Low-level sensor | 30 × 125 × 65 mm 1.20 × 5.00 × 2.75 in |
| Mounting position | upright |

¹⁾ Output increase by 20% for 60 Hz applications



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-171-016 EN




3D

skf-lubrication.partcommunity.com/3d-cad-models

Pump unit

ZPU 01/02

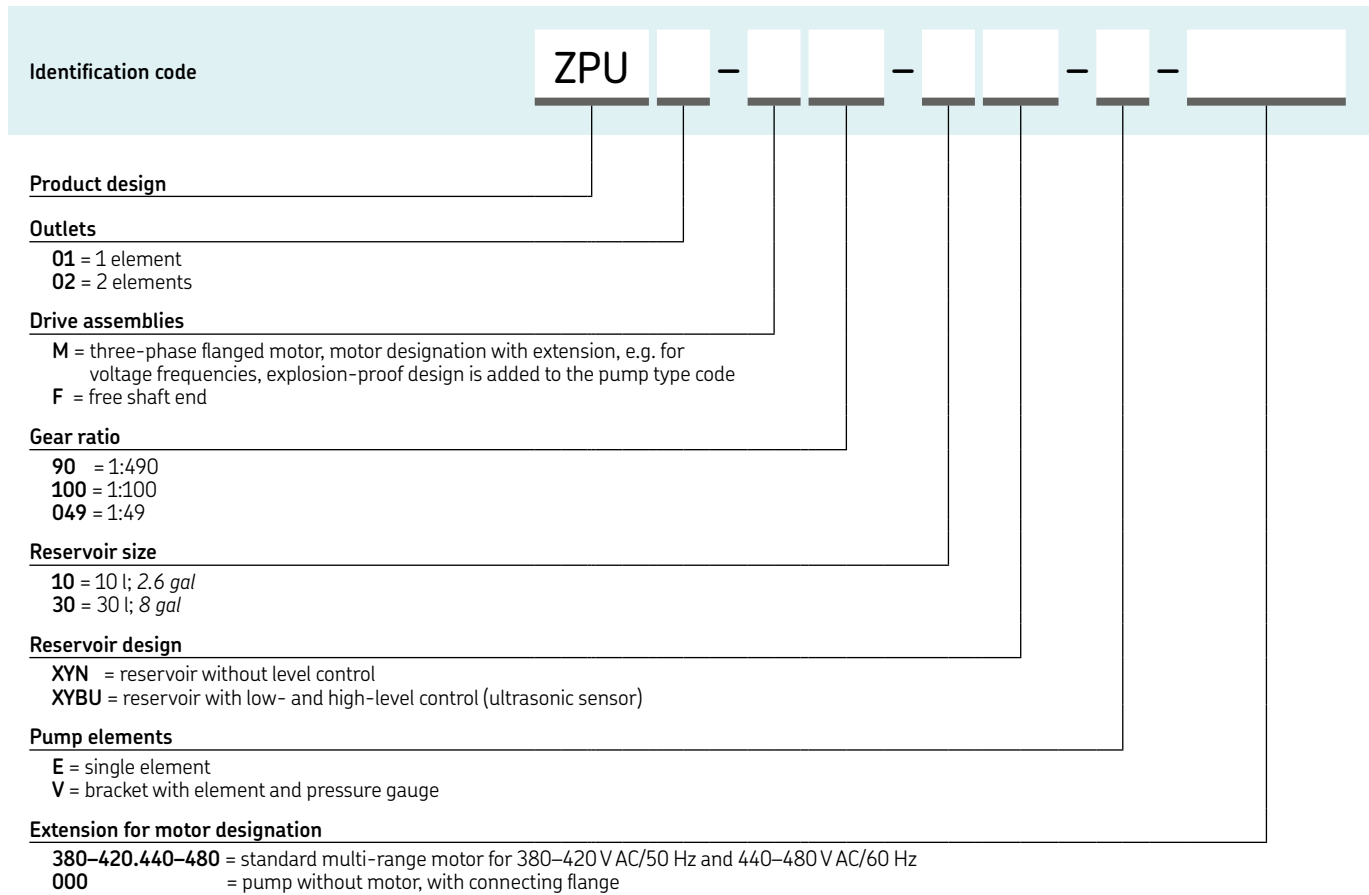

Pump unit

EDL1



Description

The EDL1 is an easy-to-use, electrical pressure booster for sectional lubrication systems. High output pressure enables provision of lubricant from a single source to progressive metering devices and distant lubrication points with different lubricant requirements. Low input pressure of 2 bar (29 psi), allows for retrofit installations in existing systems. For operation of EDL1 an additional feeder pump is required.

Features and benefits

- Cost-effective solution
- Environmentally friendly; no need for pressurized air; can be driven by solar panels
- Virtually maintenance free
- User-friendly design and operation
- Flexible inlet and outlet positions
- Sends fault messages remotely
- Optional pressure switch available

Applications

- Food and beverage
- Wayside lubrication in rail applications
- Cement industry
- Other heavy industries

Technical data

| | |
|-----------------------|---|
| Function principle | electronically operated lubricator |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | max. 280 bar; 4 015 psi |
| Inlet pressure | min. 2 bar; max. 280 bar min. 30 psi; max. 4 015 psi |
| Lubricant | grease: NLGI 1 and 2 |
| Outlets | 1 |
| Metering quantity | |
| full stroke | 1 cm ³ /min; 0.06 in ³ /min |
| half stroke | 0,5 cm ³ /min; 0.03 in ³ /min |
| Operating voltage | 24 V DC (± 10%) |
| Connection main line | GE-LX10 (others on request) |
| Protection class | IP 65 |
| Dimensions | 116 × 114 × 350 mm 4.56 × 4.48 × 13.78 in |
| Mounting position | any |

 NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-171-010 EN, 16144 EN




3D

skf-lubrication.partcommunity.com/3d-cad-models

Pump unit

EDL1

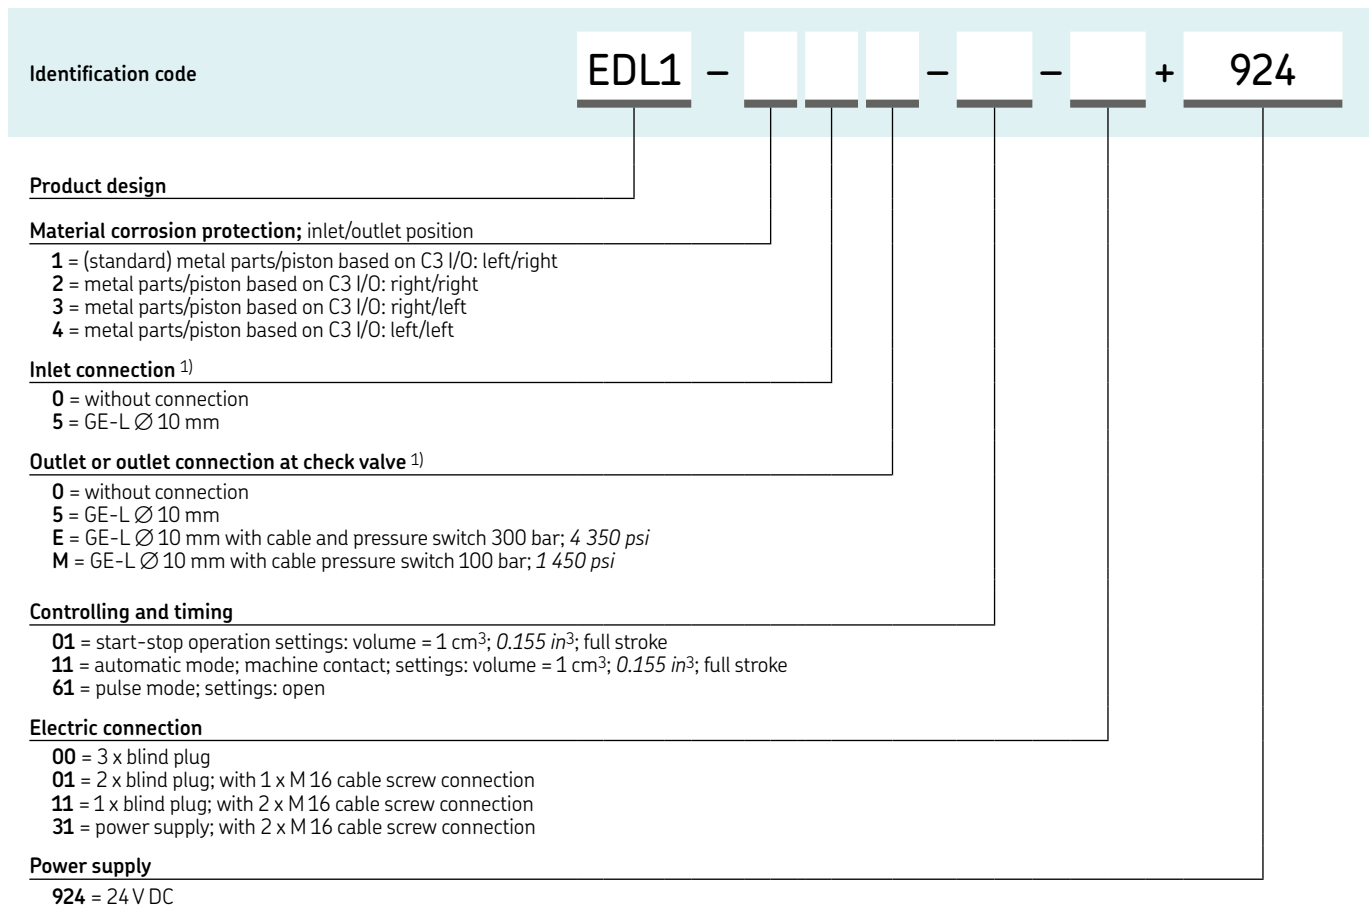

¹⁾ Composition defined by material: corrosion protection

Pump unit

E-PUMP



Description

The electrical barrel pumping unit E-PUMP is a versatile barrel pump and it is especially designed for pumping oil or grease lubricants up to NLGI grade 2 into a centralized lubrication system. When equipped with a change-over valve unit, as E-VALV e.g. or a shut-off valve as E-VALVE-S e.g. it can be used either in single-line, dual-line or progressive lubrication systems. A complete pumping center consists of a pumping unit and a lid set. EPUMP-XXX-ECO coding is referring to ECO lid sets (descending pump head with follower plate), which are suitable for greases in NLGI grades 1 and 2 while EPUMP-XXX-STA coding is referring to STA lid sets (pump head always at barrel bottom), which are suitable for oil or greases in NLGI 0, 00 and 000 classes.

Features and benefits

- EPUMP models reflecting typical and often used barrel sizes
- Compact electrically operated pump for applications where no air supply is available
- An internal pressure control and a heating element secure the pump's function in high-pressure conditions and cold climates

Applications

- Heavy industries (paper, steel and other process industries)
- Mining and mineral processing
- Machinery workshops
- Food and beverage
- Cement industry

Technical data

| | |
|-------------------------|--|
| Function principle | electrically operated pump |
| Outlets | 1 |
| Number of pump elements | 4 |
| Metering quantity | 55 g/min; 0.3880136 oz/min |
| Operating temperature | -30 to +70 °C, -20 to 160 °F |
| Operating pressure | max. 240 bar, 3 480 psi |
| Lubricant | grease up to NLGI 2 oil up to 40–1 000 mm ² /s |
| Supply voltage | 20–32 V DC |
| Power consumption | 150 W |
| Heater | 40W/24V, heater resistor for pump elements in ECO models LED's 5 yellow, 1 green, 1 red |
| Display | LED's 5 yellow, 1 green, 1 red |
| Drum capacity | 18, 50 and 180 kg, 40, 120 or 400 lb drum not included |
| Pressure sensor | 50–240 bar adjustable in 25 bar steps 725.1 to 3480.9 psi in 362.6 psi steps |
| Protection class | IP 65 |
| Dimensions | depending on the model min. 400 × 400 × 800 mm max. 400 × 400 × 1 300 mm min. 15.75 × 15.75 × 31.49 in max. 15.75 × 15.75 × 51.18 in |
| Mounting position | vertical |

Pump unit

E-PUMP

EPUMP

| Order number | Designation | Lubricant | Control | Suitable barrel size | |
|-----------------|------------------------|------------------------------------|---|----------------------|-----|
| | | | | kg | gal |
| 12375010 | SKF-EPUMP-1/8-ECO-24-P | Grease up to NLGI 2 | integrated control unit for progressive systems | 18 | 4.5 |
| 12375090 | SKF-EPUMP-1/4-ECO-24-P | Grease up to NLGI 2 | integrated control unit for progressive systems | 50 | 13 |
| 12375170 | SKF-EPUMP-1/1-ECO-24-P | Grease up to NLGI 2 | integrated control unit for progressive systems | 180 | 45 |
| 12375050 | SKF-EPUMP-1/8-STA-24-P | Oil up to 1 000 mm ² /s | integrated control unit for progressive systems | 18 | 4.5 |
| 12375130 | SKF-EPUMP-1/4-STA-24-P | Oil up to 1 000 mm ² /s | integrated control unit for progressive systems | 50 | 13 |
| 12375210 | SKF-EPUMP-1/1-STA-24-P | Oil up to 1 000 mm ² /s | integrated control unit for progressive systems | 180 | 45 |

Accessories


Lid sets for grease barrels



Lid sets for grease barrels

| Order number | Designation | Lubricant | for barrel size | |
|-----------------|------------------|-----------|-----------------|-----|
| | | | kg | lb |
| 12381280 | E-LIDSET-1/8-ECO | Grease | 18 | 40 |
| 12381285 | E-LIDSET-1/4-ECO | Grease | 50 | 120 |
| 12381290 | E-LIDSET-1/1-ECO | Grease | 180 | 400 |

Lid sets for oil

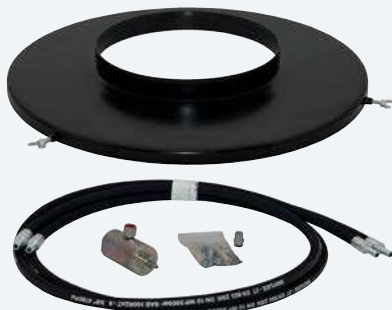

Lid sets for oil barrels

| Order number | Designation | Lubricant | for barrel size | |
|-----------------|------------------|-----------|-----------------|-----|
| | | | kg | lb |
| 12381292 | E-LIDSET-1/8-STA | Oil | 18 | 40 |
| 12381294 | E-LIDSET-1/4-STA | Oil | 50 | 120 |
| 12381296 | E-LIDSET-1/1-STA | Oil | 180 | 400 |

Pump unit

PPU-5/PPU-35



Description

PPU-5 and PPU-35 are air-operated piston pumps designed to supply either oil or grease. They feature a spring-loaded piston that can be activated either by a 3/2-way or 4/2-way valve connection, which must be ordered separately. A reservoir (for grease only) can be connected to the pump via an intermediate plate or directly to the machine for a remote reservoir connection. Output can be modified via the adjusting screw.

Features and benefits

- Compact pump for either grease and oil within progressive system
- Adjustable output via stroke setting screw
- Direct connect reservoir or remote connect reservoir possible
- Optional low-level control available, only with integrated reservoir
- Hydraulically operated version of pump available, see under hydraulic pumps

Applications

- Small progressive systems
- Engine building
- Tube bending machines



Technical data

| | |
|----------------------------------|---|
| Function principle | air-operated piston pump |
| Operating pressure ¹⁾ | 160 bar; 2 320 psi |
| Air pressure | adjustable 4,5-10 bar; 65-145 psi |
| Priming pressure | 30 bar; 435 psi |
| Lubricant | oil and grease: up to NLGI 2 |
| Outlets | 1 |
| Metering quantity per stroke | |
| PPU-5 | 0,1-0,5 cm ³ ; 0.006-0.03 in ³ |
| PPU-35 | 0,7-3,5 cm ³ ; 0.043-0.21 in ³ |
| Reservoir | 2,5 and 5 l; 0.66 and 1.32 gal |
| Connection main line | tube Ø 10 mm |
| Dimensions | min. 247 × 40 × 120 mm max. 270 × 83 × 126 mm min. 9.72 × 1.57 × 4.72 in max. 10.63 × 3.27 × 4.96 in |
| Mounting position | any |

¹⁾ Rupture disc, other pressures available



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-170-012 EN

Pump unit

PPU-5/PPU-35

| PPU-5 ... | | | |
|--------------|----------------------|-----------|------------------------------|
| Order number | Reservoir integrated | | Low-level control integrated |
| | l | gal | |
| PPU-5 | no | <i>no</i> | no |
| PPU-5-2.5 | 2,50 | 0.66 | no |
| PPU-5-2.5W | 2,50 | 0.66 | yes |
| PPU-5-5 | 5 | 1.32 | no |
| PPU-5-5W | 5 | 1.32 | yes |

| PPU-35 ... | | | |
|--------------|----------------------|-----------|------------------------------|
| Order number | Reservoir integrated | | Low-level control integrated |
| | l | gal | |
| PPU-35 | no | <i>no</i> | no |
| PPU-35-2.5 | 2,50 | 0.66 | no |
| PPU-35-2.5W | 2,50 | 0.66 | yes |
| PPU-35-5 | 5 | 1.32 | no |
| PPU-35-5W | 5 | 1.32 | yes |

Accessories



| Order number | Colour | Burst pressure | | Thickness | |
|--------------|--------|----------------|------------|-----------|-----------|
| | | bar | <i>psi</i> | mm | <i>in</i> |
| | | PPU-BS60 | black | 60 | 870 |
| PPU-BS80 | green | 80 | 1 160 | 0,203 | 0.008 |
| PPU-BS100 | yellow | 100 | 1 450 | 0,254 | 0.010 |
| PPU-BS120 | red | 120 | 1 740 | 0,305 | 0.012 |
| PPU-BS140 | orange | 140 | 2 030 | 0,356 | 0.014 |
| PPU-BS160 | silver | 160 | 2 320 | 0,406 | 0.016 |
| PPU-BS180 | pink | 180 | 2 610 | 0.457 | 0.018 |

Pump

87214



Description

The model 87214 pump is an air-operated, single-acting pump requiring a timer and three-way valve to control the cycles. Air pressure powers the piston on the delivery stroke, and a spring returns it to priming position. Depending on the type of reservoir used, the pump is suitable for both grease and oil applications. The 87214 pump requires a specially designed reservoir that must be ordered separately.

Features and benefits

- Pump can be removed from reservoir without disturbing existing piping
- Inlet shut-off valve in reservoir base allows removal of pump without draining reservoir

Applications

- Heavy-duty machinery
- Printing industry
- Metal cutting
- Metal forming
- Wood working and processing

Technical data

| | |
|---------------------------------|--|
| Function principle | air-operated single acting pump ^{1) 2)} |
| Operating pressure | min. 4 bar, max. 14 bar <i>min. 60 psi, max. 200 psi</i> |
| Lubricant | oil and grease: NLGI 0-2 |
| Outlets | 1 |
| Metering quantity ³⁾ | |
| Oil | max. 30 strokes/min |
| Grease | <i>max. 22 strokes/min</i> 0,164-0,98 cm ³ /stroke <i>0.01-0.06 in³/stroke</i> |
| Reservoir | see accessories |
| Ratio | 18:1 |
| Connection main line | 1/4 NPTF |
| Dimensions | 162 × 44,5 × 44,5 mm <i>6.38 × 1.75 × 1.75 in</i> |
| Mounting position | upright |

¹⁾ Needs to connect special reservoir to pump, see accessories

²⁾ Pump includes NBR O-rings

³⁾ Output adjustable by steps of one turn of adjustment screw equal to 0,049 cm³; 0.003 in³

Pump

87214

87214

| Order number | Designation |
|--------------|--|
| 87214 | air-operated single acting pump, ratio 18:1, pump includes NBR O-rings |

Accessories

Reservoir



Description

These reservoirs made of acryl are designed to be mounted directly onto the pump. They include all connections for air (or hydraulic oil, see hydraulically driven pump 87212, see p. 68) and lubricant outlet. They include a gauge 200 bar; 3 000 psi and an atmospheric indicator 62 bar; 900 psi.

Modular reservoirs

| Order number | Lubricant | Capacity | | Connection ¹⁾ NPSM (F) | Dimensions | |
|--------------|-----------|----------|-------|--------------------------------------|---------------------|--------------------|
| | | l | gal | | mm | in |
| 87402 | grease | 1,475 | 0.389 | 1/8 | 295 × 172,2 × 179,6 | 11.6 × 6.78 × 7.06 |
| 87403 | grease | 2,450 | 0.647 | 1/8 | 371 × 172,2 × 179,6 | 14.6 × 6.78 × 7.06 |
| 87405 | oil | 2,365 | 0.624 | 1/8 | 262 × 172,2 × 179,6 | 10.3 × 6.78 × 7.06 |

¹⁾ For air supply and lubricant outlet

Pump

87200/87216/130179



Description

SKF's modular pumps are designed to efficiently supply either grease or oil in automatic systems using progressive metering devices. Models 87200, 87216 and 130179 are air-operated pumps that must be equipped with an appropriate baseplate and reservoir to make up a pump assembly. Baseplates contain all inlet and outlet connections for the pump and lubrication system and allow for quick pump removal without disturbing any existing piping. Removal of the pump does not require draining of the reservoir due to an integral check valve in the baseplate. Pump cycles will be controlled by a timer in conjunction with a three-way valve (supplied separately).

Features and benefits

- No dismantling of piping when removing pump
- No draining required due to integral check valve in baseplate
- Precise adjustability of output

Applications

- Small progressive systems
- Printing industry
- Material handling
- Metal processing

Technical data

| | |
|---------------------------------|--|
| Function principle | air-operated single acting piston pump ¹⁾ |
| Inlet pressure air | min. 2,8 bar, max. 10 bar |
| 87200; 87216 | <i>min. 40 psi, max. 150 psi</i> |
| 130179 | <i>min. 4,5 bar, max. 10 bar</i> |
| Lubricant | <i>min. 65 psi, max. 150 psi</i> |
| Outlets | oil and grease: NLGI 0-2 |
| Metering quantity ²⁾ | 1 |
| 87200 | 0,041-0,164 cm ³ /stroke |
| | <i>0,025-0,10 in³/stroke</i> |
| 87216 | 0,164-0,82 cm ³ /stroke |
| | <i>0,01-0,05 in³/stroke</i> |
| 130179 | 4,1-16,39 cm ³ /stroke |
| | <i>0,25-1,0 in³/stroke</i> |
| Oil | |
| 87200; 87216 | max. 30 strokes/min |
| 130179 | max. 25 strokes/min |
| Grease | |
| 87200; 87216 | max. 22 strokes/min |
| 130179 | max. 10 strokes/min |
| Ratio, pressure | 25:1 |
| 87200; 87216 | 50:1 |
| 130179 | |
| Connection main line | 1/4 NPTF |
| Dimensions | pumps only |
| 87200; 87216 | 251 × 70 × 70 mm |
| | <i>9,88 × 2,75 × 2,75 in</i> |
| 130179 | 114 × 291 × 140 mm |
| | <i>4,50 × 15,38 × 5,50 in</i> |
| Mounting position | with reservoir upside up |

¹⁾ Needs for operation modular baseplate and reservoir, see accessories
²⁾ Output adjustable by steps of one turn of adjustment screw

Pump

87200/87216/130179

| 87200/87216/130179 | | | | |
|-----------------------------|-------|---------------------|---------------------|----------------------|
| Order number | Ratio | Baseplate | | |
| | | 87218 ¹⁾ | 87204 ²⁾ | 130095 ³⁾ |
| 87200 | 25:1 | • | • | — |
| 87216 | 50:1 | • | • | — |
| 130179 ³⁾ | 25:1 | — | — | • |

- ¹⁾ For use with Modular Lube reservoirs
- ²⁾ For machine mount, use with remote reservoir customer's supply
- ³⁾ With valved piston uses Modular Lube reservoirs or pressurized (max. 140 bar; 2 000 psi) lubrication supply

Accessories



Baseplate

| 87218/87216/130179 | | | | |
|-----------------------------|--------------------|--------------------------|-----------|--|
| Order number | Air NPTF (F) inlet | Lubricant NPTF (F) inlet | outlet | |
| | <i>in</i> | <i>in</i> | <i>in</i> | |
| 87218 ¹⁾ | 1/8 | 3/8 | 1/4 | |
| 87216 ²⁾ | 1/4 | 3/8 | 1/4 | |
| 130179 ³⁾ | 1/4 | 1/4 | 1/4 | |

- ¹⁾ All baseplates use atmospheric indicator 100 bar; 1450 psi
- ²⁾ For use with Modular Lube reservoirs
- ³⁾ For machine mount, use with remote reservoir customer's supply

Description

Baseplates can be intermediate (for use with Modular Lube reservoirs) or machine mount (for use with remote reservoirs). They have all main connections for hydraulic oil and lubricant included. They include FKM O-rings.



Reservoir

| Modular reservoirs for oil systems ¹⁾ | | | | | | |
|--|----------------------|----------|------|--------------------------|-----------------|--------------------|
| Order number | Designation | Capacity | | Lubricant outlet NPTF(F) | Dimensions | |
| | | l | gal | <i>in</i> | mm | <i>in</i> |
| 87400 | cylindrical, acrylic | 2,40 | 0.63 | 1/2 | 400 × 153 × 135 | 15.7 × 6.0 × 5.3 |
| 87413 | cylindrical, acrylic | 4,70 | 1.25 | 1/2 | 450 × 168 × 199 | 17.7 × 7.3 × 7.47 |
| 87417 | tank, steel | 18,90 | 5 | 3/8 | 258 × 445 × 319 | 10.1 × 17.5 × 12.6 |
| 87418 | tank, steel | 11,30 | 3 | 3/8 | 258 × 343 × 294 | 10.1 × 13.5 × 11.6 |
| 87419 | tank, steel | 5,70 | 1.50 | 3/8 | 258 × 267 × 192 | 10.1 × 10.5 × 7.6 |

¹⁾ Use filler fitting 632004

Description

All reservoirs accept 87218 intermediate baseplate and are for direct mount.

| Modular reservoirs for grease systems ^{1) 2)} | | | | | |
|--|-------------|----------|------|-----------------|------------------|
| Order number | Designation | Capacity | | Dimensions | |
| | | l | gal | mm | <i>in</i> |
| 87406 | acrylic | 4,90 | 1.30 | 450 × 186 × 190 | 17.7 × 7.3 × 7.5 |
| 87416 | acrylic | 7,35 | 1.94 | 641 × 186 × 190 | 25.2 × 7.3 × 7.5 |
| 87421 ³⁾ | steel | 4,90 | 1.30 | 450 × 186 × 188 | 17.7 × 7.3 × 7.4 |
| 87423 ³⁾ | steel | 7,35 | 1.94 | 641 × 186 × 188 | 25.7 × 7.3 × 7.4 |

- ¹⁾ Use filler fitting 632004
- ²⁾ Reservoirs include 1/2 NPTF (F) outlet
- ³⁾ Includes visual level indicator rod

Pump unit

PP/PPG



Description

PP pumps are air-operated, single-stroke pumps that require a 3/2-way air valve to activate the air cylinder. Designed to supply grease through one outlet, the pumps are equipped with a spring-loaded follower plate and an indicator rod for level control purposes. Suitable for indoor/outdoor applications, PP pumps have one outlet and can be used with a primary progressive metering device or with a secondary-level metering device. In comparison to the PP pumps, PPG devices include an integrated metering device with eight outlets, enabling their use as small, air-operated progressive systems.

Features and benefits

- Compact, air-operated units for up to 100 lubrication points
- Indicator rod for level control available
- Unique port arrangements possible (PPG)
- Internal return of grease into reservoir (PPG)
- Simple refilling from grease pail

Applications

- Spinning machines
- Die-cutting machines
- Beverage processing
- Small presses
- Machine tools
- Handling equipment

Technical data

| | |
|------------------------------|--|
| Function principle | air-operated single-stroke piston pump |
| Operating temperature | 0 to +60 °C; +32 to 140 °F |
| Operating pressure | |
| PP | 300 bar, 4 350 psi |
| PPG | 250 bar, 3 265 psi |
| Air inlet pressure | min. 4 bar, max. 10 bar; min. 58 psi, max 145 psi |
| Air pressure ratio | 40:1 |
| Lubricant | grease: up to NLGI2 |
| Outlets | |
| PP | 1 |
| PPG | 8 |
| Metering quantity per stroke | |
| PP | 2,6 cm ³ ; 0.158 in ³ |
| PPG 1) | 0,2 cm ³ ; 0.012 in ³ |
| Reservoir | 0,4 or 1,5 l; 0.1 or 0.4 gal |
| Connection main line | |
| PP | for tube Ø 6mm |
| PPG 2) | M 10 x 1 |
| Connection main line | G 1/8 |
| Dimensions | |
| PP | 115 x 122 x 550 mm 4.53 x 4.80 x 21.65 in |
| PPG 3) | 115 x 112 x 725 mm 4.53 x 4.41 x 28.54 in |
| Mounting position | upright |

1) Average output/outlet for one pump stroke: 0,3cm³/stroke; 0.018 in³/stroke
 2) Need to use special SKF outlet fittings
 3) Level indicator fully extended

Pump unit

PP/PPG

PP/PPG

| Ordernumber | Designation | Outlets | Reservoir | |
|-------------|------------------------|---------|-----------|-----|
| | | | l | gal |
| 604-29967-1 | PP-4 | 1 | 0,4 | 0,1 |
| 604-25105-2 | PP-15 | 1 | 1,5 | 0,4 |
| 604-29968-1 | PPG-4 | 8 | 0,4 | 0,1 |
| 604-29969-1 | PPG-4-K ¹⁾ | 8 | 0,4 | 0,1 |
| 604-25111-3 | PPG-15 | 8 | 1,5 | 0,4 |
| 604-25130-3 | PPG-15-K ¹⁾ | 8 | 1,5 | 0,4 |

¹⁾ K = with optical pin indicator

Accessories

Closure plug



HP/HPG accessories

| Ordernumber | Designation | Tube |
|-------------|------------------------|------|
| | | Ø mm |
| 504-30344-4 | special outlet fitting | 6 |
| 504-30345-2 | special outlet fitting | 4 |
| 303-17499-3 | closure plug | - |

Pump unit

PFP-23-2/PFP-23-22



Description

PFP-23-2 and PFP-23-22 are air-operated grease pump units that include a reservoir and follower plate under atmospheric pressure. These pumps are made for small-sized progressive systems or for use as multi-line pumps. The output of one lever stroke is divided by two when using two outlets. A return line to the reservoir is available. Also the pump is equipped with a filling coupler to refill the pump.

Features and benefits

- Small, compact, air-operated pump
- Up to 190 bar (2 755 psi) operating pressure
- Port for return line is available on pump
- Refill by grease coupling avoids contamination of grease
- Available with one or two outlets

Applications

- Small, compact, air-operated pump
- Up to 190 bar (2 755 psi) operating pressure
- Port for return line is available on pump
- Refill by grease coupling avoids contamination of grease
- Available with one or two outlets

Technical data

| | |
|-------------------------------------|---|
| Function principle | air-operated piston pump |
| Operating temperature ¹⁾ | +10 to 60 °C; +50 to 140 °F |
| Operating pressure ²⁾ | 190 bar; 2 755 psi |
| Air inlet pressure | 6-10 bar; 87-145 psi |
| Lubricant | grease: up to NLGI2 |
| Outlets | |
| PFP-23-2: | 1 |
| PFP-23-22: | 2 |
| Metering quantity per stroke | |
| PFP-23-2: | one outlet closed, 2,5 cm ³ /port; 0.15 in ³ /port |
| PFP-23-22: | both outlets closed, 1,25 cm ³ /port; 0.076 in ³ /port |
| Ratio | 20:1 |
| Reservoir ³⁾ | 1,5 l; 0.4 gal |
| Connection main line | |
| outlets | tube Ø 10mm |
| return line | G 1/4 |
| Dimensions | 132 × 132 × 410 mm 5.20 × 5.20 × 16.14 in |
| Mounting position | upright |

¹⁾ For temperature below 10°C/ 50°F special version with follower piston pressurized with compressed air available, see further publication

²⁾ Depending on air inlet pressure

³⁾ Use filling connection order number: 995-001-500 to refill reservoir



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-170-012 EN, 1-0107-4 EN

Pump unit

PFP-23-2/PFP-23-22

PFP-23-2/PFP-23-22

| Order number | Designation | Outlets | Metering quantity per stroke/port | |
|------------------------|---|---------|-----------------------------------|-----------------|
| | | | cm ³ | in ³ |
| PFP-23-2 ¹⁾ | air-operated grease pump | 1 | 2,50 | 0.15 |
| PFP-23-22 | air-operated grease pump one outlet closed by plug | 2 | 1,25 | 0.076 |

¹⁾ One outlet closed by plug

Accessories

Refill coupling

24-9909-0244



Filler socket

| Ordernumber | Designation |
|--------------|---------------------------------|
| 24-9909-0244 | filler socket with sealing ring |

995-001-500



Coupling socket

| Ordernumber | Designation |
|-------------|---|
| 995-001-500 | coupling socket for reservoir refilling |

857-760-...



Hose socket

| Ordernumber | Designation |
|-------------|----------------------|
| 857-760-007 | hose socket; Ø 13 mm |
| 857-760-002 | hose socket; Ø 16 mm |

Pump unit

MPB



Description

The MPB pump unit is especially designed for automatic lubrication systems. The unique feature in it compared to traditional air-operated barrel pump with mechanical air motor valve is its magnetically operated air motor valve. This will reduce the amount of mechanical components in the air motor and also eliminates the need of lubrication in the air motor. The pump is suitable for use with 18, 50 and 180 kg (40, 120 and 400 lb) lubricant barrels. And when equipped with a suitable adapter MPB pump unit can also be used in lubricant bulk containers.

Features and benefits

- Lubrication-free, electronically controlled air motor enables accurate control of pump output
- Fewer mechanical components extend a service life of the air motor
- Includes self-diagnosing system
- Operates effectively in wide range of temperatures
- IP 65 protection rating

Applications

- Paper industry
- Steel industry
- Heavy industry

Technical data

| | |
|---|---|
| Function principle | air operated piston pump for barrels |
| Operating temperature | -10 to +55 °C, 14 to 131 °F |
| Operating pressure | max. 300 bar, 4 350 psi |
| Pressure ratio | 1:65 |
| Pressure air supply | 2 to 4,5 bar, 29 to 65 psi |
| Air consumption | max. 300 l/min; 80 gal/min |
| Lubricant | grease up to NLGI 2 oil up to 20–10 000 mm ² /s |
| Metering quantity per cycle ¹⁾ | 6,1 cm ³ ; 0,37 in ³ |
| Electrical connections | 20–32 V DC |
| Drum capacity | 18, 50 and 180 kg, 40, 120 or 400 lb drum not included |
| Protection class | IP 65 |
| Dimensions | depending on the model min. 650 × 130 × 130 mm max. 920 × 130 × 130 mm min. 25,6 × 5,11 × 5,11 in max. 36,22 × 5,11 × 5,11 in |
| Mounting position | vertical |

¹⁾ generally approx. 50 cycles/min are assumed



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

PUB LS/P8 17178 EN

Pump unit

MPB

| MPB Order number | Designation | Suitable barrel size | |
|---------------------|------------------|----------------------|-----|
| | | kg | lb |
| 12371702 | SKF-MPB-PUMP-1/8 | 18 | 40 |
| 12371701 | SKF-MPB-PUMP-1/4 | 50 | 120 |
| 12381700 | SKF-MPB-PUMP-1/1 | 180 | 400 |

Accessories



Air regulator unit

| Order number | Designation |
|--------------|----------------|
| 12382666 | MAX-V2-SET-MPB |



Lid sets

| Order number | Designation |
|--------------|--------------------------|
| 12381381 | MAXV2-LIDSET-1/1-ECO-MPB |
| 12381382 | MAXV2-LIDSET-1/4-ECO-MPB |
| 12381383 | MAXV2-LIDSET-1/8-ECO-MPB |
| 12381384 | MAXV2-LIDSET-1/1-STA-MPB |
| 12381385 | MAXV2-LIDSET-1/4-STA-MPB |
| 12381386 | MAXV2-LIDSET-1/8-STA-MPB |

Pump unit

87212



Description

The model 87212 pump is a hydraulically operated, single-acting pump with a double-acting, hydraulic cylinder that requires a four-way valve and timer for operation. Hydraulic pressure powers the piston on the delivery stroke and returns it to priming position. Depending on the type of reservoir used, the pump is suitable for both grease and oil applications. The 87212 pump requires a specially designed reservoir that must be ordered separately.

Features and benefits

- Pump can be removed from reservoir without disturbing existing piping
- Inlet shut-off valve in reservoir base allows removal of pump without draining reservoir

Applications

- Small progressive systems
- Foundry machinery
- Material handling
- Metal cutting



Technical data

| | |
|---------------------------------|---|
| Function principle | hydraulically operated single acting pump ^{1) 3)} |
| Operating pressure | 14-40 bar; 200-600 psi |
| Lubricant | oil and grease |
| Metering quantity ²⁾ | 0,164-0,98 cm ³ /stroke 0,01-0,06 in ³ /stroke |
| oil | max. 30 strokes/min |
| grease | max. 22 strokes/min |
| Reservoirs | see accessories |
| Pressure ratio | 5:1 |
| Connection main line | 1/4 NPTF |
| Dimensions | 162 × 44,5 × 44,5 mm 6,38 × 1,75 × 1,75 in |
| Mounting position | with reservoir upward |

¹⁾ Needs to connect special reservoir to pump, see accessories

²⁾ Output adjustable by steps of one turn of adjustment screw equal to 0.049 cm³; 0.003 in³

³⁾ Pump includes NBR O-rings

Pump unit

87212

87212

| Order number | Designation | Ratio |
|--------------|---|-------|
| 87212 | hydraulically operated single acting pump includes NBR O-rings | 5:1 |

Accessories

Reservoir



Description

These reservoirs made of acryl are designed to be mounted directly onto the pump. They include all connections for air (or hydraulic oil, see hydraulically driven pump 87212) and lubricant outlet. They include a gauge 200 bar; 3 000 psi and an atmospheric indicator 62 bar; 900 psi.

Modular reservoirs

| Order number | Lubricant | Capacity | | Connection ¹⁾ NPSM (F) | Dimensions | |
|--------------|-----------|----------|-------|--------------------------------------|---------------------|--------------------|
| | | l | gal | | mm | in |
| 87402 | grease | 1,475 | 0.389 | 1/8 | 295 × 172,2 × 179,6 | 11.6 × 6.78 × 7.06 |
| 87403 | grease | 2,450 | 0.647 | 1/8 | 371 × 172,2 × 179,6 | 14.6 × 6.78 × 7.06 |
| 87405 | oil | 2,365 | 0.624 | 1/8 | 262 × 172,2 × 179.6 | 10.3 × 6.78 × 7.06 |

¹⁾ For air supply and lubricant outlet

Pump unit

87202



Description

87202 modular pumps are designed to efficiently supply grease or oil in automatic systems using metering valve metering devices. These hydraulically operated pumps must be equipped with an appropriate baseplate and reservoir to make up a pump assembly. Baseplates contain all inlet and outlet connections for the pump and lubrication system. Pump cycles will be controlled by a timer in conjunction with a four-way valve (supplied separately).

Features and benefits

- No dismantling of piping when removing pump
- No draining required due to integral check valve in baseplate
- Precise adjustability of output

Applications

- Small progressive systems
- Metal forming
- Metal cutting

Technical data

| | |
|----------------------|---|
| Function principle | hydraulically operated pump |
| Operating pressure | 20-138 bar; 275-2 000 psi |
| Lubricant | oil and grease |
| Metering quantity | 0,41-1,64 cm ³ /stroke 0,025-0,10 in ³ /stroke |
| Outlet | 1 |
| Connection main line | 1/4 NPTF |
| Dimensions | 241,3 × 47,7 × 54,1 mm 9,5 × 1,88 × 2,13 in |
| Mounting position | with reservoir upward |

Pump unit

87202

87200/87216/130179

| Order number | Ratio | Baseplate 87218 ¹⁾ | 87204 ²⁾ |
|--------------|-------|----------------------------------|---------------------|
| 87202 | 7:1 | • | • |

¹⁾ For use with Modular Lube reservoirs²⁾ For machine mount, use with remote reservoir customer's supply

Accessories

Baseplate

Baseplates¹⁾

| Order number | Air NPTF (F) inlet | Lubricant NPTF (F) inlet | outlet |
|---------------------|--------------------------|--------------------------------|--------|
| 87218 ²⁾ | 1/8 | 3/8 | 1/4 |
| 87204 ³⁾ | 1/4 | 3/8 | 1/4 |

¹⁾ All baseplates use atmospheric indicator 100 bar; 1450 psi²⁾ For use with Modular Lube reservoirs³⁾ For machine mount, use with remote reservoir customer's supply

Description

Baseplates can be intermediate (for use with Modular Lube reservoirs) or machine mount (for use with remote reservoirs). They have all main connections for hydraulic oil and lubricant included. They include FKM O-rings.

Reservoir

Modular reservoirs for oil systems¹⁾

| Order number | Designation | Capacity | | Lubricant outlet ¹⁾ NPTF (F) | Dimensions | |
|--------------|----------------------|----------|------|---|-----------------|--------------------|
| | | l | gal | | mm | in |
| 87400 | cylindrical, acrylic | 2,40 | 0.63 | 1/2 | 400 × 153 × 135 | 15.7 × 6.0 × 5.3 |
| 87413 | cylindrical, acrylic | 4,70 | 1.25 | 1/2 | 450 × 168 × 199 | 17.7 × 7.3 × 7.47 |
| 87417 | tank, steel | 18,90 | 5 | 3/8 | 258 × 445 × 319 | 10.1 × 17.5 × 12.6 |
| 87418 | tank, steel | 11,30 | 3 | 3/8 | 258 × 343 × 294 | 10.1 × 13.5 × 11.6 |
| 87419 | tank, steel | 5,70 | 1.50 | 3/8 | 258 267 × 192 | 10.1 × 10.5 × 7.6 |

¹⁾ Use filler fitting 632004

Description

All reservoirs accept 87218 intermediate baseplate and are for direct mount.

Modular reservoirs for grease systems^{1) 2)}

| Order number | Designation | Capacity | | Dimensions | |
|---------------------|-------------|----------|------|-----------------|------------------|
| | | l | gal | mm | in |
| 87406 | acrylic | 4,90 | 1.30 | 450 × 186 × 190 | 17.7 × 7.3 × 7.5 |
| 87416 | acrylic | 7,35 | 1.94 | 641 × 186 × 190 | 25.2 × 7.3 × 7.5 |
| 87421 ³⁾ | steel | 4,90 | 1.30 | 450 × 186 × 188 | 17.7 × 7.3 × 7.4 |
| 87423 ³⁾ | steel | 7,35 | 1.94 | 641 × 186 × 188 | 25.7 × 7.3 × 7.4 |

¹⁾ Use filler fitting 632004²⁾ Reservoirs include 1/2 NPTF (F) outlet³⁾ Includes visual level indicator rod

Pump unit

PHU-5/PHU-35



Description

PHU-5 and PHU-35 are hydraulically operated piston pumps for progressive systems. They are designed to supply either oil or grease. The pumps feature a spring-loaded piston that can be activated either by a 3/2-way or 4/2-way valve connection, which must be ordered separately. A reservoir can be connected to the pump via an intermediate plate or directly to the machine for a remote reservoir connection. Pump output can be modified via the adjusting screw.

Features and benefits

- Compact pump for either grease and oil
- Adjustable output via stroke setting screw
- Direct connect reservoir or remote connect reservoir possible
- Optional low-level control available, only with integrated reservoir
- Air operated version of pump available

Applications

- Small progressive systems
- Small presses

Technical data

| | |
|------------------------------|---|
| Function principle | hydraulically operated piston pump |
| Operating pressure | 160 bar; 2 320 psi |
| Actuating pressure | adjustable: 4,5-10 bar; 65-145 psi |
| Priming pressure | 30 bar; 435 psi |
| Lubricant | oil and grease: up to NLGI 2 |
| Metering quantity per stroke | |
| PHU-5 | adjustable: 0,1-0,5 cm ³ ; 0.006-0.03 in ³ |
| PHU-35 | adjustable: 0,7-3,5 cm ³ ; 0.043-0.21 in ³ |
| Outlet | 1 |
| Reservoir | 2,5 and 5 l; 0.66 and 1.32 gal |
| Connection main line | M10×1 or tube Ø 10 mm |
| Dimensions | min. 247 × 40 × 120 mm max. 270 × 83 × 126 mm min. 9.72 × 1.57 × 4.72 in max. 10.63 × 3.27 × 4.96 in |
| Mounting position | any |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

1-0107-5 EN; 951-170-012 EN

Pump unit

PHU-5/PHU-35

| Order number | Reservoir integrated | | Low-level control integrated |
|--------------|----------------------|------|------------------------------|
| | l | gal | |
| | PHU-5 | no | |
| PHU-5-2.5 | 2,50 | 0.66 | no |
| PHU-5-2.5W | 2,50 | 0.66 | yes |
| PHU-5-5 | 5 | 1.32 | no |
| PHU-5-5W | 5 | 1.32 | yes |

| Order number | Reservoir integrated | | Low-level control integrated |
|--------------|----------------------|------|------------------------------|
| | l | gal | |
| | PHU-35 | no | |
| PHU-35-2.5 | 2,50 | 0.66 | no |
| PHU-35-2.5W | 2,50 | 0.66 | yes |
| PHU-35-5 | 5 | 1.32 | no |
| PHU-35-5W | 5 | 1.32 | yes |

Accessories



| Order number | Colour | Burst pressure | | Thickness | |
|--------------|--------|----------------|-------|-----------|-------|
| | | bar | psi | mm | in |
| | | PPU-BS60 | black | 60 | 870 |
| PPU-BS80 | green | 80 | 1 160 | 0,203 | 0.008 |
| PPU-BS100 | yellow | 100 | 1 450 | 0,254 | 0.010 |
| PPU-BS120 | red | 120 | 1 740 | 0,305 | 0.012 |
| PPU-BS140 | orange | 140 | 2 030 | 0,356 | 0.014 |
| PPU-BS160 | silver | 160 | 2 320 | 0,406 | 0.016 |
| PPU-BS180 | pink | 180 | 2 610 | 0.457 | 0.018 |

Pump unit

PFH-23-2/PFH-23-22



Description

PFH-23-2 and PFH-23-22 are hydraulically operated grease pump units that include a reservoir and follower plate under atmospheric pressure. These pumps are suitable for small-sized progressive systems or for use as multi-line pumps. When using two outlets, the output of one lever stroke is divided by two.

Features and benefits

- Small, compact, hydraulically operated pump
- Up to 200 bar (2 900 psi) operating pressure
- Pump port for return line is available
- Refilling via grease coupling avoids grease contamination
- Available with one or two outlets

Applications

- Small- and medium-sized machines
- Applications with hydraulic power supply
- Especially for indoor applications
- Die-cutting machines
- Small presses



Technical data

| | |
|-----------------------------------|---|
| Function principle | hydraulically operated grease pump |
| Operating temperature | +10 to 60 °C; +50 to 140 °F |
| Operating pressure ¹⁾ | 200 bar; 2 900 psi |
| Air inlet pressure | 6-30 bar; 87-435 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | |
| PHP-23-2 | 1 |
| PHP-23-22 | 2 |
| Metering quantity per port/stroke | |
| PHP-23-2 | one outlet closed: 2,5 cm ³ ; 0.15 in ³ |
| PHP-23-22 | both outlets closed: 1,25 cm ³ ; 0.076 in ³ |
| Pressure ratio | 7:1 |
| Reservoir ²⁾ | 1,5 l; 0.4 gal |
| Connection main line | |
| outlets | tube Ø 10mm |
| return line | G 1/4 |
| Dimensions | 132 x 132 x 458 mm 5.20 x 5.20 x 18.03 in |
| Mounting position | upright |

¹⁾ Depending on hydraulic inlet pressure

²⁾ Use filling connection order no. 995-001-500 to refill reservoir



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

1-0107-4 EN; 951-170-012 EN

Pump unit

PFH-23-2/PFH-23-22

PFH-23-2/PFH-23-22

| Ordernumber | Designation | Outlets | Metering quantity per stroke/port | |
|------------------------|------------------------------------|---------|-----------------------------------|-----------------|
| | | | cm ³ | in ³ |
| PFH-23-2 ¹⁾ | hydraulically operated grease pump | 1 | 2,50 | 0.15 |
| PFH-23-22 | hydraulically operated grease pump | 2 | 1,25 | 0.076 |

¹⁾ One outlet closed by plug

Accessories

Refill coupling

24-9909-0244



Filler socket

| Ordernumber | Designation |
|--------------|---------------------------------|
| 24-9909-0244 | filler socket with sealing ring |

995-001-500



Coupling socket

| Ordernumber | Designation |
|-------------|---|
| 995-001-500 | coupling socket for reservoir refilling |

857-760-...



Hose socket

| Ordernumber | Designation |
|-------------|----------------------|
| 857-760-007 | hose socket; Ø 13 mm |
| 857-760-002 | hose socket; Ø 16 mm |

Pump unit

MCLP



Description

MCLP pumps are designed to supply oil under high pressure to a distribution circuit of progressive metering devices connected downstream. They include two main parts – the MCLP gearbox containing the lubrication oil and the MCLP pump heads. The gearbox can hold up to two pump heads. By the action of a cam in the gearbox, the pump plunger is pushed upward on the delivery stroke and returned to priming position by the plunger return spring. The cam can be actuated by an electrical motor or by connection to a machine. The cam of all pump models has a single lobe for pump head actuation.

Features and benefits

- two sizes of pump heads available
- Fully adjustable output
- Driven by machine or electric motor (supplied separately)
- Various gear ratios available

Applications

- Applications with high pressure
- Natural gas engines
- Refineries
- Compressors

Technical data


| | |
|------------------------------|--|
| Function principle | free shaft-end piston pump |
| Operating temperature | -18 to +94 °C; 0 to +200 °F |
| Operating pressure | |
| pump head 7 mm: | max. 550 bar; max. 8 000 psi |
| pump head 10 mm: | max. 240 bar; max. 3 500 psi |
| Relief pressure | |
| pump head 7 mm: | max. 375 bar; max. 5 500 psi |
| pump head 10 mm: | max. 220 bar; max. 3 250 psi |
| Inlet pressure | max. 3,5 bar; max. 50 psi |
| Lubricant | oil: 20–1 500 mm ² /s |
| Outlets | 1 -2 |
| Metering quantity per stroke | |
| pump head 7 mm: | 0,033–0,24 cm ³ ; 0.002–0.015 in ³ |
| pump head 10 mm: | 0,07–0,49 cm ³ ; 0.004–0.03 in ³ |
| Reservoir | 1,5 l; 0.4 gal |
| Drive speed | 12 to 75 min ⁻¹ |
| Internal gear ratio | 2:1, 4:1, 8:1, 21.5:1 |
| Connection main line | |
| inlet | 3/8 NPTF (F) |
| outlet | 1/4 NPTF (F) |
| Dimensions | 258 × 206 × 343 mm 10.19 × 8.13 × 13.50 in |
| Mounting position | upside up |

Pump unit

MCLP

| MCLP | | | |
|-------------|-------------------|------------|---|
| Ordernumber | Drive position | Gear ratio | Pump head |
| 130201BCC | right, long shaft | 2:1 | 2, including two pump heads, model number 130335 –, to be ordered separately –, to be ordered separately –, to be ordered separately |
| 130200GEE | right | 8:1 | |
| 130200DEE | right | 4:1 | |
| 130300GEE | left | 8:1 | |


Accessories

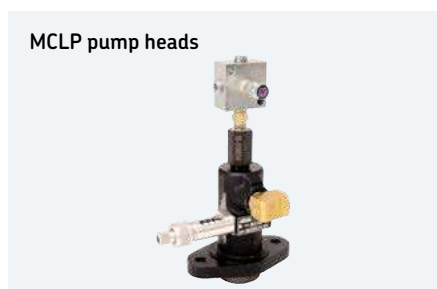

MCLP pump heads

MCLP Pump heads are fitted to the MCLP gear box. Up to two pump heads can be used.

| MCLP pump heads | |
|-----------------|----------------|
| Ordernumber | Piston Ø mm |
| 130332 | 7 |
| 130335 | 10 |

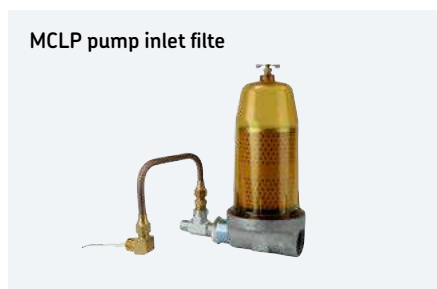

MCLP pump inlet filter

This MCLP pump inlet filter serves two pump heads. It filters the oil, from the header tank, before entering the pump heads with filter size 10 µm.

| MCLP pump inlet filter | | | |
|------------------------|------------------|-----------------------------------|----|
| Order number | Inlet NPTF(F) | Inlet pressure max. bar psi | |
| 130067 | 1 | 3,5 | 50 |



In-line filter

Filter used at the outlet of the pump heads to remove solid contaminants before delivering lubricants to the supply line. Uses filtering element size 10 µm. Has a hexbody size 1 1/4 in and includes FKM seal.

| In-line filter | | | |
|----------------|------------------|-----------------------------------|-------|
| Order number | Inlet NPTF(F) | Inlet pressure max. bar psi | |
| 84239 | 1/4 | 415 | 6 000 |



No-flow valve

MCLP Pump heads are fitted to the MCLP gear box. Up to two pump heads can be used.

| No-flow valve | | | | |
|---------------|---------------------------------------|-------|-------------------------------|-----|
| Order number | Operating pressure max. bar psi | | Air supply max. bar psi | |
| 87862 | 415 | 6 000 | 10 | 150 |

Pump unit

HP/HPG



Description

The manually operated single-stroke lever pump HP is designed for use in progressive systems to supply grease through one outlet. They are equipped with a spring-loaded follower plate and an indicator rod for level control purposes. The pumps can be used with a primary progressive metering device only or also with a secondary-level metering device. Similar to HP pumps, HPG pumps include a special integrated progressive metering device with eight outlets. Therefore, the HPG are suitable for small manually operated progressive systems.

Features and benefits

- No power supply necessary
- Ease of use
- HPG with integrated progressive metering device, serving up to 8 lubrication points
- HPG 15 pumps refillable via filling nipple
- Level control via indicator rod

Applications

- Applications without power supply
- Indoor use
- Excenter presses
- Slurry centrifuges



Technical data

| | |
|------------------------------------|---|
| Function principle | manually operated single-stroke piston pump |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | 250 bar, 3 625 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | 1-8 |
| Metering quantity per stroke | 1,6 cm ³ ; 0.10 in ³ |
| Reservoir | |
| HP 4/ HPG 4 | 0,4; 0.1 gal |
| HP15 / HPG15 | 1,5 l; 0.4 gal |
| Connection main line ¹⁾ | for tube Ø 6mm; M10x1 |
| Dimensions ²⁾ | min. 73 x 110 x 350 mm max. 107 x 180 x 455 mm min. 2.87 x 5.15 x 21.65 in max. 4.21 x 7.09 x 19.91 in |
| Mounting position | upright |

¹⁾ Need to use special outlet fittings

²⁾ Add approx. 153 mm for depth and 85 mm for height for full extension of lever and level rod



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-231-000-EN

Pump unit

HP/HPG

| HP/HPG | | | | |
|-------------|-------------|--------|--------------------|-------|
| Ordernumber | Designation | Outlet | Operating pressure | |
| | | | bar | psi |
| 604-25102-1 | HP 4 | 1 | 250 | 3 625 |
| 604-25103-1 | HP 15 | 8 | 250 | 3 625 |
| 604-25108-2 | HPG 4 | 8 | 200 | 2 900 |
| 604-25109-2 | HPG 15 | 8 | 200 | 2 900 |
| 604-25128-2 | HPG 15-K 1) | 8 | 200 | 2 900 |

Accessories



| HP/HPG accessoriess | | |
|---------------------|--|------|
| Ordernumber | Designation | Tube |
| | | Ø mm |
| 504-30344-4 | special outlet fitting | 6 |
| 504-30345-2 | special outlet fitting | 4 |
| 303-17499-3 | closure plug to reduce number of outlets | - |

Description

HP pump type is delivered with outlet fittings for tube Ø 6 mm. Special outlet connection fittings need to be used for pump model HPG. The closure plugs allow it to adapt the number of outlets. The output is then a multiple of 0,2 cm³; 0.012 in³.

Pump unit

HP-500 W/HP-500 W-SSV



Description

The manually operated, single-stroke HP-500W pump is designed to be affixed vertically on a wall. The pump can supply grease directly to lubrication points or can be connected to progressive metering devices for an even supply of lubricant.

The HP 500W-SSV version of the pump features an integrated metering device with various outlet numbers. Both models may be used with bulk grease or with standard 400 g (0.88 lb) cartridges.

Features and benefits

- Uses standard cartridges
- No electrical power supply necessary
- Refillable bulk reservoir
- Easy to use
- Available with or without integrated metering device

Applications

- Applications without power supply
- Indoor use
- Printing industry
- Punching machines
- Planing machines

Technical data

| | |
|------------------------------------|---|
| Function principle | manually operated single-stroke piston pump |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | |
| HP-500W | 400 bar, 5 800 psi |
| HP-500W SSV | 350 bar, 3 625 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlet | |
| HP-500W | 1 |
| HP-500W SSV | 6, 8, 10, 12 |
| Metering quantity | |
| HP-500W | per stroke: 1,5 cm ³ ; 0.09 in ³ |
| HP-500W SSV | per SSV outlet: 0,2 cm ³ ; 0.012 in ³ |
| Reservoir | |
| with cartridge | 0,4 l; 0.11 gal |
| without cartridge | 0,5 l; 0.13 gal |
| Connection main line ¹⁾ | M 10 × 1 ¹⁾ |
| Dimensions ²⁾ | |
| HP-500W | 95 × 165 × 380 mm 3.74 × 6.50 × 14.96 in |
| HP-500W SSV | 95 × 165 × 405 mm 3.74 × 6.50 × 15.94 in |
| Mounting position | upright |

¹⁾ Need to use special outlet fittings

²⁾ Add approx. 195 mm for depth and 210 mm for height for full extension of lever and level rod



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-231-000-EN

Pump unit

HP-500 W/HP-500 W-SSV

HP-500 W/HP-500 W-SSV

| Ordernumber | Designation | Outlet | Metering device |
|-------------|----------------|--------|-----------------|
| 244-14164-1 | HP-500 W | 1 | – |
| 604-28766-1 | HP-500W-SSV 6 | 6 | • |
| 604-28767-1 | HP-500W-SSV 8 | 8 | • |
| 604-28768-1 | HP-500W-SSV 10 | 10 | • |
| 604-28769-1 | HP-500W-SSV 12 | 12 | • |

Accessories

Closure plug



HP/HPG accessories

| Ordernumber | Designation | Tube Ø mm |
|-------------|--|--------------|
| 504-30344-4 | special outlet fitting | 6 |
| 504-30345-2 | special outlet fitting | 4 |
| 303-17499-3 | closure plug to reduce number of outlets | – |

Description

HP 500 W pumps need special outlet connection fittings. The closure plugs allow it to adapt the number of outlets. The output is then a multiple of 0,2 cm³; 0.012 in³.

Pump unit

PF-VPBM/169-000-146



Description

The manually operated PF-VPBM pump was developed to supply lubricant from a grease cartridge. Equipped with an integrated metering device, the easy-to-use pump is suitable for applications requiring a compact progressive system. Its size can vary from six to 12 outlets that supply even amounts of lubricant.

The PF-VPBM version of the pump features an integrated metering device with various outlet numbers. Both models may be used with bulk grease or with standard 400 g (0.88 lb) cartridges.

Features and benefits

- Reliable, user-friendly pump
- Utilizes grease cartridges for convenience
- Varying number of outlets available

Applications

- Farm machinery
- Small stackers
- Construction machinery
- Motor vehicle superstructures

Technical data

| | |
|--|--|
| Function principle | manually operated piston pump |
| Operating temperature | -25 to +80 °C; -13 to +180 °F |
| Operating pressure | 400 bar, 5 800 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | 6-12 |
| Metering quantity | per lever stroke without metering device: 2,0 cm ³ ; 0.12 in ³ |
| Reservoir | 450 cm ³ in 400 g cartridge 27.46 in ³ in 0.88 lbs cartridge |
| Connection main line Dimensions ²⁾ | outlet fitting: M 10 × 1 |
| HP-500W | min. 140 × 156 × 396 mm max. 140 × 156 × 506 mm |
| HP-500W SSV | min. 5.51 × 6.14 × 15.59 in max. 5.51 × 6.14 × 19.92 in |
| Mounting position | any |

¹⁾ pump available with one outlet, without block metering device

²⁾ add approx. 244 mm, 9.6 in for depth and 415 mm; 16.3 in for height for full extension of lever and level rod



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

1-9430-EN, 951-230-008-EN

Pump unit

PF-VPBM/169-000-146

PF-VPBM/169-000-146

| Ordernumber | Outlet | Metering device |
|-------------|--------|-----------------|
| 169-000-146 | 1 | – |
| PF-VPBM-3-2 | 6 | • |
| PF-VPBM-4-2 | 8 | • |
| PF-VPBM-5-2 | 10 | • |
| PF-VPBM-6-2 | 12 | • |

Accessories

Outlet fitting



PF-VPBM accessories

| Ordernumber | Designation | Tube |
|-------------|---------------------------------|------|
| | | Ø mm |
| VPKM-RV-S4 | outlet fitting with check valve | 6 |
| VPKM-RV-VS | push-in fitting | 6 |
| 917-006-101 | closure plug | |

Pump unit

HJ 2



Description

The manually operated HJ 2 pump unit was developed to provide lubricant to points that do not require continuous lubrication. Comprising of two supply pistons and a 3 liter (0.8 gal) reservoir with an integrated stirring device, this robust pump unit operates effectively, even at low temperatures. Operating pressure is 300 bar (4 350 psi).

Features and benefits

- Suitable for use with dual-line or progressive systems
- Dispenses greases up to NLGI 3
- Available with left- or right-hand lever

Applications

- Metal forming
- Roll straighteners
- Tire heating presses
- Harbor cranes

Technical data

| | |
|-----------------------|---|
| Function principle | manually operated doubler stroke piston pump |
| Operating temperature | -20 to +70 °Cxxxx; -4 to +160 °F |
| Operating pressure | max. 300 bar, 4 350 psi |
| Lubricant | grease: up to NLGI 3; depending on operating temperature oil: with a viscosity minimum 150 mm ² /s at operating temperature |
| Outlets | up to 2 |
| Metering quantity | HJ 2: 2 cm ³ , 0.122 in ³ HJ 2A: 2x 1 cm ³ , 0.061 in ³ |
| Reservoir | 3 l; 0.8 gal |
| Connection main line | G 1/4 |
| Dimensions | 410 × 135 × 393 mm 16.1 × 5.5 × 15.5 in |
| Mounting position | upright |

Pump unit

HJ 2

| HJ2 | | | |
|-------------|--------------|---------------------|---------|
| Ordernumber | Designation | Position hand lever | Outlets |
| 603-41200-1 | HJ 2 R-3 XYN | right | 1 |
| 603-41200-2 | HJ 2 L-3 XYN | left | 1 |
| 603-41200-3 | HJ2AR- 3XYN | right | 2 |
| 603-41200-4 | HJ2AL- 3XYN | left | 2 |

Accessories




Outlet fitting with integrated check valve

| Ordernumber | Designation | Tube |
|-------------|----------------------|------|
| | | Ø mm |
| 223-13052-1 | GERV 6-S G 1/4 AVCF | 6 |
| 223-13052-2 | GERV 8-L G 1/4 AVCF | 8 |
| 223-13052-3 | GERV 10-L G 1/4 AVCF | 10 |

Note: must be ordered with pump

Pump unit

PF-23-2/PF-23-22

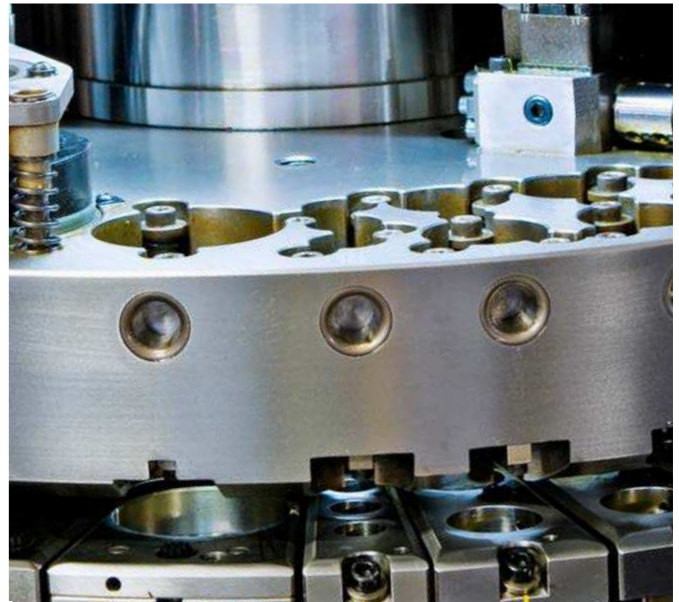

Description

PF-23-2 and PF-23-22 are manually operated grease pump units that include a reservoir and follower plate under atmospheric pressure. These pumps are made for small-sized progressive systems or for use as multi-line pumps. When using two outlets, the output of one lever stroke is divided by two. A return line to the reservoir is available. Also, these pumps are equipped with a filling coupler for replenishing the reservoir.

Features and benefits

- Small, compact, manually operated pump
- Up to 100 bar operating pressure
- Pump inlet for return line is available
- Refilling via grease coupler avoids grease contamination
- Available with one or two outlets

Applications

- Small- and medium-sized machines
- Applications where no power supply is available
- Especially for indoor applications
- Excenter presses
- Punching machines

Technical data

| | |
|---|---|
| Function principle | manually operated single stroke piston pump |
| Operating temperature | +10 to 60 °C; +50 to 140 °F |
| Operating pressure at 200 N manual force: | 100 bar; 1 450 psi |
| Lubricant | grease: up to NLGI 2 |
| Outlets | |
| PF-23-2 | 1 |
| PF-23-22 | 2 |
| Metering quantity per stroke | |
| PHP-23-2 | one outlet closed: 2,5 cm ³ ; 0.15 in ³ |
| PHP-23-22 | both outlets closed: 1,25 cm ³ ; 0.076 in ³ |
| Reservoir | 1,5 l; 0.4 gal |
| Material reservoir | acryl glass |
| Connection main line | |
| outlets | tube Ø 10mm |
| return line | G 1/4 |
| Dimensions | 185 x 130 x 397 mm 7.28 x 5.12 x 15.63 in |
| Mounting position | upright |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

951-170-012 EN, 1-0107-4-EN

Pump unit

PF-23-2/PF-23-22

PF-23-2/PF-23-22

| Ordernumber | Outlets | Metering quantity | |
|-----------------------|---------|-------------------------|-------------------------|
| | | cm ³ /stroke | in ³ /stroke |
| PF-23-2 ¹⁾ | 1 | 2,50 | 0.150 |
| PF-23-22 | 2 | 1,25 | 0.076 |

¹⁾ One outlet closed by plug

Accessories

Refill coupling

24-9909-0244



Filler socket

| Ordernumber | Designation |
|--------------|---------------------------------|
| 24-9909-0244 | filler socket with sealing ring |

995-001-500



Coupling socket


| Ordernumber | Designation |
|-------------|---|
| 995-001-500 | coupling socket for reservoir refilling |

857-760-...



Hose socket

| Ordernumber | Designation |
|-------------|----------------------|
| 857-760-007 | hose socket; Ø 13 mm |
| 857-760-002 | hose socket; Ø 16 mm |

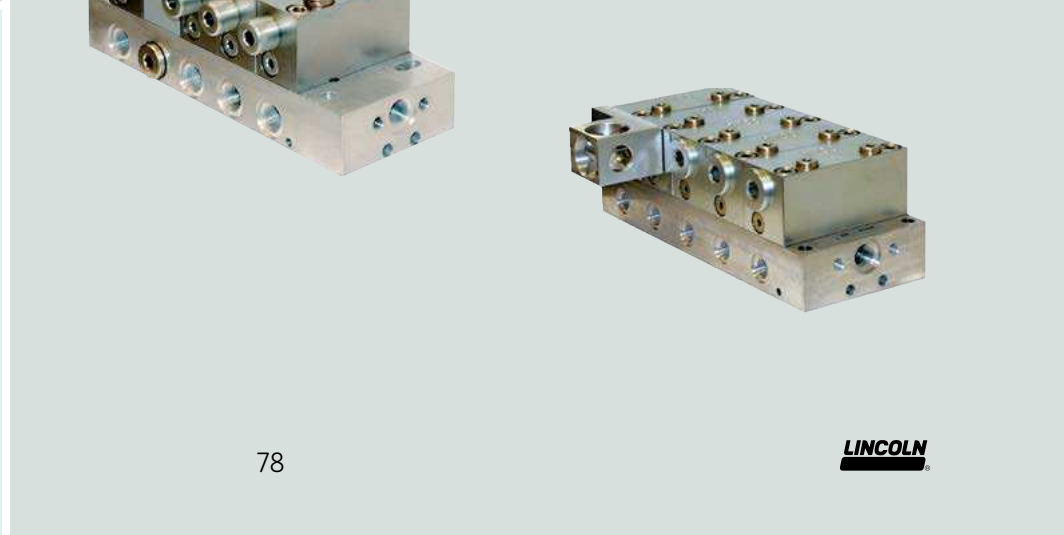

Overview of metering devices

Block metering device

| Product | Lubricant Oil/ fluid grease | Grease | Metering quantity | | Outlets ¹⁾ | Operating pressure max. | | Page |
|---------|-----------------------------------|--------|-------------------------|-------------------------|-----------------------|----------------------------|-------|------|
| | | | cm ³ /outlet | in ³ /outlet | | bar | psi | |
| SSVM | • | • | 0,07 | 0.004 | 6 to 12 | 200 | 2 900 | 80 |
| SSVD | • | • | 0,08–1,80 | 0.005–0.11 | 6 to 22 | 350 | 5 075 | 82 |
| SSVDL | • | • | 0,08–1,80 | 0.005–0.11 | 6 to 14 | 350 | 5 075 | 84 |
| SPVS | • | • | 0,16–0,32 | 0.010–0.02 | 2 to 4 | 100 | 1 450 | 86 |
| VPB | • | • | 0,2 | 0.01 | 6 to 20 | 300 | 4 350 | 88 |
| SSV | • | • | 0,2 | 0.01 | 6 to 22 | 350 | 5 075 | 90 |
| SSVL | • | • | 0,2 | 0.01 | 6 to 14 | 350 | 5 075 | 92 |

¹⁾ By crossporting or closing outlets possible to reduce outlet number below given minimum

Sectional metering device

| Product | Lubricant Oil/ fluid grease | Grease | Metering quantity | | Outlets | Operating pressure max. | | Page |
|---------|-----------------------------------|--------|-------------------------|-------------------------|---------|----------------------------|-------|------|
| | | | cm ³ /outlet | in ³ /outlet | | bar | psi | |
| VPK | • | • | 0,050–0,600 | 0.003–0.037 | 6 to 20 | 300 | 4 350 | 94 |
| VP | • | • | 0,100–1,200 | 0.006–0.073 | 6 to 20 | 300 | 4 350 | 96 |

Segment metering device

| Product | Lubricant Oil/ fluid grease | Grease | Metering quantity | | Outlets ¹⁾ | Operating pressure max. | | Page |
|---------------------|-----------------------------------|--------|-------------------------|-------------------------|-----------------------|----------------------------|-------|------|
| | | | cm ³ /outlet | in ³ /outlet | | bar | psi | |
| PSG1 | • | • | 0,050–0,250 | 0.003–0.015 | 6 to 20 | 200 | 2 900 | 98 |
| PSG2 | • | • | 0,060–0,840 | 0.003–0.051 | 6 to 20 | 200 | 2 900 | 100 |
| PSG3 | • | • | 0,800–3,200 | 0.049–0.195 | 6 to 20 | 200 | 2 900 | 102 |
| UV | • | • | 0,164–0,656 | 0.010–0.040 | 6 to 16 | 240 | 3 480 | 104 |
| MC ² -HP | • | • | 0,196–0,393 | 0.012–0.024 | 6 to 16 | 510 | 7 425 | 106 |
| XL | • | • | 0,983–2,460 | 0.060–0.150 | 6 to 12 | 170 | 2 495 | 108 |

Metering device

SSVM



Description

SSVM type metering device is a compact single block progressive piston-type metering device. For direct mount of fittings with no need of any sealing in-between. Specially designed for small output needs, small spaces due to its small dimensions and short distances. Available with pin indicator for visual system monitoring.

Features and benefits

- Small and compact size for applications where space is restricted
- Internal combining of outlets
- Exact lubricant metering
- Available with visual pin indicator

Applications

- Printing industry
- Wood processing machines
- Material handling machines

Technical data

| | |
|---------------------------------|---|
| Function principle | block metering device |
| Outlets ¹⁾ | 6 to 12 |
| Lubricant | |
| grease: | up to NLGI 2 |
| oil: | at least 40 mm ² /s |
| Metering quantity | |
| per cycle and outlet: | 0,07 cm ³ ; 0,043 in ³ |
| Connection inlet | G 1/8 or 1/8 NPTF |
| Connection outlet ²⁾ | M 8 × 1 |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | max. 200 bar; 2 900 psi |
| Material | black chromated steel |
| Dimensions | min. 48,50 × 50 × 25 mm max. 83 × 50 × 25 mm min. 1.91 × 1.97 × 0.98 in max. 3.27 × 1.97 × 0.98 in |
| Mounting position | any |

¹⁾ By crossporting or closing outlets possible to reduce outlet number below given minimum. Outlet #1 and #2 should never be closed
²⁾ Use special SSVM outlet fittings

Metering device

SSVM

SSVM

| Order number | Inlet connection thread | Inlet connection thread | Outlets | Visual pin indicator | Material |
|--------------|-------------------------|-------------------------|---------|----------------------|-----------------------|
| | BSPP | NPTF | | K | black chromated steel |
| 619-26761-1 | | 619-26764-1 | 6 | – | • |
| 619-37044-1 | | 619-26650-1 | 8 | – | • |
| 619-26846-1 | | 619-26848-1 | 10 | – | • |
| 619-37049-1 | | 619-26653-1 | 12 | – | • |
| 619-26762-3 | | 619-26765-3 | 6 | • | • |
| 619-37045-3 | | 619-26651-3 | 8 | • | • |
| 619-26847-2 | | 619-26849-3 | 10 | • | • |
| 619-37050-3 | | 619-26654-3 | 12 | • | • |

Accessories

Outlet fittings

SSVM accessories

| Order number | Designation |
|--------------|--|
| 303-16284-1 | outlet closure screw with sealing edge |
| 226-14091-5 | outlet push-in fitting with clamping ring and check valve for pressure plastic tube Ø 4 mm |
| 519-31661-1 | screw-in fitting with clamping ring and -check valve for steel tube Ø 4 mm |

Metering device

SSVD



Description

SSVD type metering device is a compact single block progressive metering device with adjustable output by means of different metering screw sizes. The screw meters the output for a pair of outlets (opposite outlets). For direct mount of fittings with no need of any sealing in-between. It is a versatile metering device available in many variants regarding type of monitoring or surface treatment.

Features and benefits

- Ten different metering screw sizes available
- Optionally visual or electrical monitoring
- Nickel plated surface treatment for corrosive environment available
- Ideal for use as primary metering device

Applications

- Construction and mining
- Farm machinery
- Industrial equipment

Technical data

| | |
|---------------------------------|---|
| Function principle | block metering device |
| Operating temperature | -25 to +70 °C; -13 to +158 °F |
| Operating pressure | max. 350 bar; 5 075 psi |
| Outlets ¹⁾ | 6 to 22 |
| Lubricant | |
| grease: | up to NLGI 2 |
| oil: | at least 40 mm ² /s |
| Metering quantity ²⁾ | |
| per cycle and outlet: | min. 0,08 cm ³ ; 0.0042 in ³ max. 1,80 cm ³ ; 0.11 in ³ |
| Connection inlet | G 1/8 or 1/8 NPTF |
| Connection outlet ³⁾ | M 10 × 1 |
| Material | black chromated steel or nickel plated |
| Dimensions | min. 70 × 60 × 40 mm max. 190 × 60 × 40 mm min. 2.75 × 2.36 × 1.57 in max. 7.48 × 2.36 × 1.57 in |
| Mounting position | any |

¹⁾ By crossporting or closing outlets possible to reduce outlet number below given minimum. Outlet #1 and #2 should never be closed
²⁾ Depending on metering screw valid for a pair of opposite outlets
³⁾ Use special SSVD outlet fittings

NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12401 EN

Metering device

SSVD

SSVD ¹⁾

| Outlets | Order number Standard | Visual pin K | Emergency nipple E | Piston detector, cable (3 m, 9.8 ft) no plug N | Indicator pin, proximity switch, cable (2 m, 6.6 ft), no plug KN | Piston detector, with connection M 12, 3 wire NP |
|---------|--------------------------|-----------------|--------------------------|--|--|--|
|---------|--------------------------|-----------------|--------------------------|--|--|--|

SSVD BSPP, black chromated

| | | | | | | |
|----|-------------|-------------|-------------|-------------|-------------|-------------|
| 6 | 649-29485-1 | 649-29505-1 | 649-77394-1 | 649-29495-1 | 649-29515-1 | 649-29525-1 |
| 8 | 649-29486-1 | 649-29506-1 | 649-77395-1 | 649-29496-1 | 649-29516-1 | 649-29526-1 |
| 10 | 649-29487-1 | 649-29507-1 | 649-77396-1 | 649-29497-1 | 649-29517-1 | 649-29527-1 |
| 12 | 649-29488-1 | 649-29508-1 | 649-77397-1 | 649-29498-1 | 649-29518-1 | 649-29528-1 |
| 14 | 649-29489-1 | 649-29509-1 | 649-77398-1 | 649-29499-1 | 649-29519-1 | 649-29529-1 |
| 16 | 649-29587-1 | 649-29595-1 | 649-77399-1 | 649-29611-1 | 649-29603-1 | 649-29619-1 |
| 18 | 649-29588-1 | 649-29596-1 | 649-77400-1 | 649-29612-1 | 649-29604-1 | 649-29620-1 |
| 20 | 649-29589-1 | 649-29597-1 | 649-77401-1 | 649-29613-1 | 649-29605-1 | 649-29621-1 |
| 22 | 649-29590-1 | 649-29598-1 | 649-77402-1 | 649-29614-1 | 649-29606-1 | 649-29622-1 |

SSVD NPTF, black chromated

| | | | | | | |
|----|-------------|-------------|---|-------------|-------------|-------------|
| 6 | 649-29535-1 | 649-29545-1 | - | 649-29565-1 | 649-29555-1 | 649-29575-1 |
| 8 | 649-29536-1 | 649-29546-1 | - | 649-29566-1 | 649-29556-1 | 649-29576-1 |
| 10 | 649-29537-1 | 649-29547-1 | - | 649-29567-1 | 649-29557-1 | 649-29577-1 |
| 12 | 649-29538-1 | 649-29548-1 | - | 649-29568-1 | 649-29558-1 | 649-29578-1 |
| 14 | 649-29539-1 | 649-29549-1 | - | 649-29569-1 | 649-29559-1 | 649-29579-1 |
| 16 | 649-29627-1 | 649-29635-1 | - | 649-29651-1 | 649-29643-1 | 649-29659-1 |
| 18 | 649-29628-1 | 649-29636-1 | - | 649-29652-1 | 649-29644-1 | 649-29660-1 |
| 20 | 649-29629-1 | 649-29637-1 | - | 649-29653-1 | 649-29645-1 | 649-29661-1 |
| 22 | 649-29630-1 | 649-29638-1 | - | 649-29654-1 | 649-29646-1 | 649-29662-1 |

SSV BSPP, nickel plated

| | | | | | | |
|----|-------------|-------------|---|---|---|---|
| 6 | 649-77180-1 | 649-77853-1 | - | - | - | - |
| 8 | 649-77181-1 | 649-77854-1 | - | - | - | - |
| 10 | 649-77182-1 | 649-77855-1 | - | - | - | - |
| 12 | 649-77183-1 | 649-77856-1 | - | - | - | - |
| 14 | 649-77184-1 | 649-77857-1 | - | - | - | - |
| 16 | 649-77185-1 | 649-77858-1 | - | - | - | - |
| 18 | 649-77186-1 | 649-77859-1 | - | - | - | - |
| 20 | 649-77187-1 | 649-77852-1 | - | - | - | - |
| 22 | 649-77188-1 | 649-77860-1 | - | - | - | - |

¹⁾ SSVD also with emergency lubrication nipple available

Accessories

SSVD Outlets and devices

| Order number | Designation |
|--------------|--|
| 303-17499-3 | Outlet closure plug, with sealing edge, steel |
| 303-19346-2 | Outlet closure plug, with sealing edge, stainless steel |
| 226-10328-5 | Outlet push-in fitting, with clamping ring and check valve for tube or plastic tube with stud for Ø 6 mm |
| 504-30344-4 | Outlet screw-in fitting, with clamping ring and check valve for tube Ø 6 mm |
| 219-13798-3 | O-ring for stainless steel closure plug if after tightening with 18 Nm not sealed |
| 519-318 26-1 | Device for external gathering of SSV outputs from outlet #1 and #2 |

Metering adjustment screws

| Order number ^{1) 2)} | | Code | Output | |
|-------------------------------|-------------|------|-----------------|-----------------|
| Single product | Bag of 12 | | cm ³ | in ³ |
| 303-16118-1 | 549-34254-1 | A | 0,08 | 0.0049 |
| 303-16119-1 | 549-34254-2 | B | 0,14 | 0.0085 |
| 303-16120-1 | 549-34254-3 | C | 0,20 | 0.012 |
| 303-16121-1 | 549-34254-4 | D | 0,30 | 0.018 |
| 303-16122-1 | 549-34254-5 | E | 0,40 | 0.024 |
| 303-16123-1 | 549-34254-6 | F | 0,60 | 0.037 |
| 303-16124-1 | 549-34254-7 | G | 0,80 | 0.049 |
| 303-16125-1 | 549-34254-8 | H | 1,00 | 0.061 |
| 303-16126-1 | 549-34254-9 | I | 1,40 | 0.085 |
| 303-16127-1 | 549-34255-1 | J | 1,80 | 0.110 |

¹⁾ For black chromated SSVD; for nickel plated SSVD ask for metering screws in stainless steel

²⁾ 549-34255-2 a Bag of 2 pcs. each

Metering device

SSVDL



Description

SSVDL type metering device is a single block progressive metering device with larger tube diameters especially for heavy industry applications. Available with pin indicator for visual system monitoring or with piston detector for electrical system monitoring. Outlet combining elements for 2, 3, 4 and 5 outlets available.

Features and benefits

- Similar to SSVD but with larger distances between the outlets for larger tube diameters
- Sizes 6 to 14 outlets
High operating pressure
- Exact lubricant metering
- Optionally equipped with visual monitoring pin or with electrically monitored piston detector

Applications

- Heavy industry



Technical data

| | |
|---|--|
| Function principle | block metering device |
| Operating temperature | -25 to +75 °C; -13 to +167 °F |
| Operating pressure | max. 350 bar; 5 075 psi |
| Outlets ¹⁾ | 6 to 14 |
| Lubricant | |
| grease: | up to NLGI 2 |
| oil: | minimum 40 mm ² /s |
| Metering quantity per cycle and outlet: | min. 0,08 cm ³ ; 0,0042 in ³ max. 1,80 cm ³ ; 0,11 in ³ |
| Connection inlet | R 1/4 |
| Connection outlet | 8, 10 or 12 mm |
| Material | black chromated steel |
| Dimensions | min. 110 × 60 × 50 mm max. 230 × 60 × 50 mm min. 4.33 × 2.36 × 1.97 in max. 9.05 × 2.36 × 1.97 in |
| Mounting position | any |

¹⁾ To ensure metering device operation outlet 1 and 2 should never be closed by a closure plug



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12401 EN

Metering device

SSVDL

SSVDL

| Outlets | Order number Standard | Visual pin | with bypass bore |
|---------|--------------------------|-------------|------------------|
| 6 | 649-77167-1 | 649-77474-1 | 649-77464-1 |
| 8 | 649-77168-1 | 649-77475-1 | 649-77466-1 |
| 10 | 649-77169-1 | 649-77476-1 | 649-77468-1 |
| 12 | 649-77170-1 | 649-77477-1 | 649-77470-1 |
| 14 | 649-77171-1 | 649-77478-1 | 649-77472-1 |

Metering adjustment screws

| Order number ^{1) 2)} | | Code | Output | |
|-------------------------------|-------------|------|-----------------|-----------------|
| Single product | Bag of 12 | | cm ³ | in ³ |
| 303-16118-1 | 549-34254-1 | A | 0,08 | 0.0049 |
| 303-16119-1 | 549-34254-2 | B | 0,14 | 0.0085 |
| 303-16120-1 | 549-34254-3 | C | 0,20 | 0.012 |
| 303-16121-1 | 549-34254-4 | D | 0,30 | 0.018 |
| 303-16122-1 | 549-34254-5 | E | 0,40 | 0.024 |
| 303-16123-1 | 549-34254-6 | F | 0,60 | 0.037 |
| 303-16124-1 | 549-34254-7 | G | 0,80 | 0.049 |
| 303-16125-1 | 549-34254-8 | H | 1,00 | 0.061 |
| 303-16126-1 | 549-34254-9 | I | 1,40 | 0.085 |
| 303-16127-1 | 549-34255-1 | J | 1,80 | 0.110 |

¹⁾ For black chromated SSVD; for nickel plated SSVD ask for metering screws in stainless steel

²⁾ 549-34255-2 a Bag of 2 pcs. each

Accessories

Outlet combinations

| Order number | Designation |
|--------------|---|
| 519-34643-1 | double, assembly (incl. pos. 2 × 3, 1 × 5) |
| 519-34643-2 | triple, assembly (incl. pos. 3 × 3, 2 × 5) |
| 519-34643-3 | quadruple, assembly (incl. pos. 4 × 3, 3 × 5) |
| 519-34643-4 | quintuple, assembly (incl. pos. 5 × 3, 4 × 5) |

Metering device

SPVS



Description

Block type metering devices of the SPVS series are used to either increase the number of outlets of a lubricating pump or to portion the volume flow and deliver it to the lube points, without any influence on the operating system pressure.

Features and benefits

- Compact design
- Compact two piston version with mechanical interlock, prevents selfblockage
- Universally usable for oil and grease
- Central function monitoring with electrical stroke monitoring device possible
- Accurate lubricant distribution due to fitted pistons

Applications

- Metal forming machines
- Small machinery
- Packaging machines

Technical data

| | |
|-------------------------------------|--|
| Function principle | block metering device |
| Operating temperature ²⁾ | -10 to +100 °C; -14 to +212 °F |
| Operating pressure ¹⁾ | max. 100 bar; 1 450 psi |
| Outlets | 2 to 4 |
| Lubricant | grease: up to NLGI 2 oil at least 12 mm ² /s |
| Metering quantity | per cycle and outlet |
| 4 outlets: | 0,16 cm ³ ; 0,01 in ³ |
| 2 outlets | 0,32 cm ³ ; 0,02 in ³ |
| Inlet volume flow | max. 45 cm ³ ; 2,75 in ³ |
| Connection inlet/outlet | M12x1 or G 1/8 |
| Material | |
| with M 12 x 1: | brass |
| with G 1/8: | steel |
| with electrical monitoring | cast iron |
| Electrical monitoring | one electrical cycle/pulse corresponds to 0,64 cm ³ , 0,04 in ³ |
| Electrical connection | plug according DIN 43650 |
| Voltage rated U _i | 30 V DC |
| Current load I _i | 0,02 A |
| Output function | closer |
| Switching element | reed contact |
| Protection class ³⁾ | IP 65 |
| Dimensions | 55 x 168,5 x 31 mm 2,16 x 6,63 x 1,22 in |
| Mounting position | any |

¹⁾ max. differential pressure with oil 20 bar (290 psi), with grease 30 bar (435 psi)
²⁾ for basic design without electric monitoring
³⁾ available in ATEX design upon request

NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

1-3029 EN

Metering devices

SPVS

| SPVS | | | | | | |
|--------------|---------|-----------------|----------|--------------------------|-----------|--|
| Order number | Outlets | Thread G 1/8 | M 12 x 1 | Monitoring electrical | Material | |
| 44-2578-6321 | 2 | • | – | – | steel | |
| 44-2578-6323 | 4 | • | – | – | steel | |
| 44-2578-6110 | 2 | – | • | – | brass | |
| 44-2578-6201 | 4 | – | • | – | brass | |
| 44-2578-6360 | 2 | • | – | • | cast iron | |
| 44-2578-6350 | 4 | • | – | • | cast iron | |

Metering devices

VPB



Description

VPB type metering devices are compact single-block progressive metering. Available with pin indicator for visual system monitoring or with piston detector for electrical system monitoring.

Feature and benefits

- Robust and cost-efficient
- Available in metric and inch design
- Optional visual or electric monitoring
- Internal crossporting possibility, use of standard tube fittings
- Variety of material as zinc coated or stainless steel available

Applications

- Metal forming machines
- Vehicles
- Production machines of automotive industry
- Packaging machines
- Printing industry
- Farm machinery
- Construction and mining

Technical data

| | |
|----------------------------|---|
| Function principle | block metering device |
| Outlets | 6 – 20 |
| Lubricant | grease up to NLGI 2 oil: operating viscosity 12 mm ² /s per stroke and outlet: 0,2 cm ³ ; 0.01 in ³ |
| Metering quantity | |
| Operating pressure | oil: max. 200 bar; 2 900 psi grease: max. 300 bar; 4 350 psi |
| Operating temperature | -25 to +110 °C; -13 to +230 °F |
| Material | stainless steel, tinned/nitrile |
| Inlet connection | VPBM; M 10 × 1 VPBG; G 1/8 |
| Outlet connection | VPBM; M 10 × 1 VPBG; G 1/8 |
| Dimensions | min: 60 × 60 × 30 mm max: 165 × 60 × 30 mm min. 2.36 × 2.36 × 1.18 in min. 6.48 × 2.36 × 1.18 in |
| Mounting position | |
| on machines | any |
| without vibration | piston position should be 90° |
| on machines with vibration | to machine movements direction |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

1-3017-EN, 951-230-008-EN

Metering devices

VPB


| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|---|--|
| Identification code | VPB | | | | | | | | A | |
| Progressive block metering device | | | | | | | | | | |
| Thread inlet and outlet screw connection | | | | | | | | | | |
| M = M 10×1 G = G 1/8 | | | | | | | | | | |
| Metering device sections (a section consists of 2 opposing outlets) | | | | | | | | | | |
| 3 = for 3 sections (max. 6 outlets) | 7 = for 7 sections (max. 14 outlets) | | | | | | | | | |
| 4 = for 4 sections (max. 8 outlets) | 8 = for 8 sections (max. 16 outlets) | | | | | | | | | |
| 5 = for 5 sections (max. 10 outlets) | 9 = for 9 sections (max. 18 outlets) | | | | | | | | | |
| 6 = for 6 sections (max. 12 outlets) | 10 = for 10 sections (max. 20 outlets) | | | | | | | | | |
| Outlets | | | | | | | | | | |
| 6 = 6 outlets open ... | | | | | | | | | | |
| 20 = 20 outlets open | | | | | | | | | | |
| Monitoring type | | | | | | | | | | |
| 00 = without | | | | | | | | | | |
| P 2 = piston detector, 2-pin connection | | | | | | | | | | |
| P 3 = piston detector, 3-pin connection | | | | | | | | | | |
| ZY = cycle indicator (use with check valve only) | | | | | | | | | | |
| Installation position of the monitoring system | | | | | | | | | | |
| -1R = right-hand side on the 1st section | ... | | | | | | | | | |
| -1L = left-hand side on the 1st section | -0R = right-hand side on the 10 th section | | | | | | | | | |
| -2R = right-hand side on the 2nd section | -0L = left-hand side on the 10 th section | | | | | | | | | |
| Attachments | | | | | | | | | | |
| 00 = without attachments | | | | | | | | | | |
| 15 = with (grease) 2/2-directional solenoid valve. When de-energized, continuity to metering device closed | | | | | | | | | | |
| Version | | | | | | | | | | |
| A = change version | | | | | | | | | | |
| Material | | | | | | | | | | |
| 1 = basic design | | | | | | | | | | |
| 3 = stainless steel design, monitoring on stainless steel version only with cycle switch (ZY) possible | | | | | | | | | | |

Accessories

| VPB inlet fittings | | | VPB outlet fittings | | |
|--------------------|-------------|------------------|---------------------|-----------------------|------------------|
| Ordernumber | Designation | for tube Ø mm | Ordernumber | Designation | for tube Ø mm |
| 406-423 | M10×1 | 6 | 404-403 | M10×1 | 6 |
| 441-008-511 | M10×1 | 8 | 406-403 | M10×1 | 8 |
| 410-443 | M10×1 | 10 | 441-008-511 | M10×1 | 10 |
| | | | 451-006-518-VS | M10×1 Quick Connector | 6 |
| 406-403W | G1/8 | 6 | 406-403W | G1/8 | 6 |
| 408-423W | G1/8 | 8 | 408-423W | G1/8 | 8 |
| 410-443W | G1/8 | 10 | 410-443W | G1/8 | 10 |
| | | | 451-006-518W VS | G1/8 Quick Connector | 6 |
| | | | 466-431-001 | M10×1 closure plug | – |
| | | | 466-419-001 | G1/8 closure plug | – |

Metering device

SSV

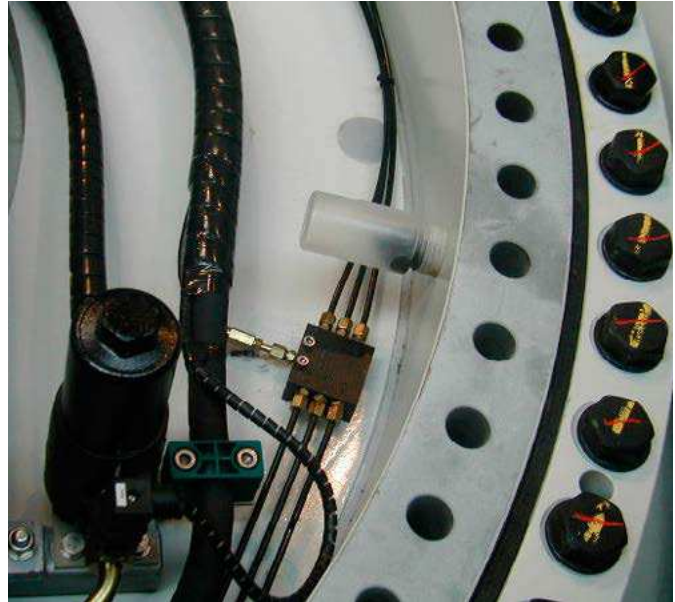

Description

SSV type metering device is a compact single block progressive metering device. For direct mount of fittings with no need of any sealing inbetween. Available with pin indicator for visual system monitoring or with piston detector for electrical system monitoring. Metering device has to be ordered in single parts, see chart.

Features and benefits

- Sizes up to 22 outlets
- High operating pressure
- Available in different materials
- Exact lubricant metering
- Unique internal crossporting technology
- Optionally equipped with visual monitoring pin or with electrically monitored piston detector

Applications

- Construction and mining
- Farm machinery
- Industrial equipment
- Renewable energies

Technical data

| | |
|---------------------------------|--|
| Function principle | block metering device |
| Outlets ¹⁾ | 6 to 22 |
| Lubricant | |
| grease: | up to NLGI 2 |
| oil: | at least 40 mm ² /s |
| Metering quantity | |
| per cycle and outlet: | 0,2cm ³ ; 0.01 in ³ |
| Connection inlet | G 1/8 or 1/8 NPTF |
| Connection outlet ²⁾ | M 10 x 1 |
| Operating temperature | -40 to +200 °C -40 to +390 °F |
| Operating pressure | max. 350 bar; 5 075 psi |
| Material | black chromated steel, stainless steel |
| Dimensions | min. 60 x 60 x 30 mm max. 180 x 60 x 30 mm min. 2.37 x 2.37 x 1.18 in max. 7.087 x 2.63 x 1.18 in |
| Mounting position | any |

¹⁾ crossporting or closing outlets possible to increase metering quantity of the open outlets - outlet #1 and #2 should never be closed
²⁾ use special SSV outlet fittings

NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions are available on SKF.com/lubrication:

12401 EN

Metering device

SSV

SSV Order number

| Outlets | Standard | Visual pin | with bypass bore | cable (3 m, 9.8 ft) no plug | Indicator pin, proximity switch, cable (2 m, 6.6 ft), no plug | Piston detector, with connection M 12, w3 wire NP |
|---------|----------|------------|------------------|--------------------------------|---|--|
| | | K | E | N | KN | |

SSV BSPP black chromated

| | | | | | | |
|----|-------------|-------------|-------------|-------------|-------------|-------------|
| 6 | 619-26473-1 | 619-26474-3 | 619-77345-1 | 619-28257-1 | 619-27613-1 | 619-29050-1 |
| 8 | 619-25730-2 | 619-25754-4 | 619-77346-1 | 619-28258-1 | 619-27614-1 | 619-29051-1 |
| 10 | 619-26841-1 | 619-26842-2 | 619-77347-1 | 619-28259-1 | 619-27615-1 | 619-29052-1 |
| 12 | 619-25731-2 | 619-25755-4 | 619-77348-1 | 619-28260-1 | 619-27616-1 | 619-29674-1 |
| 14 | 619-28862-1 | 619-28871-1 | 619-77349-1 | 619-28890-1 | 619-29028-1 | 619-29387-1 |
| 16 | 619-28863-1 | 619-28872-1 | 619-77350-1 | 619-28907-1 | 619-28905-1 | 619-29951-1 |
| 18 | 619-28864-1 | 619-28873-1 | 619-77351-1 | 619-28957-1 | 619-28959-1 | 619-29139-1 |
| 20 | 619-28865-1 | 619-28874-1 | 619-77352-1 | 619-28935-1 | 619-28934-1 | 619-77301-1 |
| 22 | 619-28866-1 | 619-28875-1 | 619-77353-1 | 619-29015-1 | 619-77461-1 | 619-29973-1 |

SSV BSPP, stainless steel 1.4305/303

| | | | | | | |
|----|-------------|-------------|-------------|---|---|-------------|
| 6 | 619-27471-1 | 619-27472-1 | 619-77680-1 | - | - | 619-29929-1 |
| 8 | 619-27473-1 | 619-27474-1 | 619-77681-1 | - | - | 619-29322-1 |
| 10 | 619-27475-1 | 619-27476-1 | 619-77682-1 | - | - | 619-29970-1 |
| 12 | 619-27477-1 | 619-27478-1 | 619-77683-1 | - | - | 619-29971-1 |
| 14 | 619-29063-1 | 619-29067-1 | 619-77684-1 | - | - | 619-29993-1 |
| 16 | 619-29064-1 | 619-29068-1 | 619-77685-1 | - | - | 619-29994-1 |
| 18 | 619-29065-1 | 619-29069-1 | 619-77686-1 | - | - | 619-77178-1 |
| 20 | 619-29066-1 | 619-29074-1 | 619-77687-1 | - | - | - |
| 22 | 619-29775-1 | 619-77910-1 | 619-77688-1 | - | - | 619-77179-1 |

SSV BSPP, stainless steel 1.4571/316 Ti

| | | | | | | |
|----|-------------|---|---|---|---|---|
| 6 | 619-27824-1 | - | - | - | - | - |
| 8 | 619-27825-1 | - | - | - | - | - |
| 10 | 619-27889-1 | - | - | - | - | - |
| 12 | 619-27900-1 | - | - | - | - | - |

SSV NPT, black chromated

| | | | | | | |
|----|-------------|-------------|---|---|---|---|
| 6 | 619-27121-1 | 619-27122-1 | - | - | - | - |
| 8 | 619-26396-2 | 619-26646-2 | - | - | - | - |
| 10 | 619-26844-1 | 619-26845-2 | - | - | - | - |
| 12 | 619-26398-2 | 619-26648-2 | - | - | - | - |
| 14 | 619-29400-1 | 619-28899-1 | - | - | - | - |
| 16 | 619-29401-1 | 619-28900-1 | - | - | - | - |
| 18 | 619-77828-1 | 619-28901-1 | - | - | - | - |
| 20 | 619-77829-1 | 619-28902-1 | - | - | - | - |
| 22 | - | 619-77254-1 | - | - | - | - |

SSV NPT, stainless steel 1.4305/303

| | | | | | | |
|----|-------------|-------------|---|---|---|---|
| 6 | 619-27792-1 | 619-27793-1 | - | - | - | - |
| 8 | 619-27796-1 | 619-27797-1 | - | - | - | - |
| 10 | 619-27800-1 | 619-27801-1 | - | - | - | - |
| 12 | 619-27804-1 | 619-27805-1 | - | - | - | - |
| 14 | - | 619-77101-1 | - | - | - | - |

Accessories

| Order number | Designation |
|--------------|---|
| 303-17499-3 | Outlet closure plug with sealing edge, steel |
| 303-19346-2 | Outlet closure plug with sealing edge, stainless steel |
| 219-13798-3 | O-ring for stainless steel closure plug if after tightening with 18 Nm not sealed |
| 226-14091-4 | Outlet push-in fitting with clamping ring and check valve for tube or plastic tube for Ø 6 mm |
| 504-30344-4 | Outlet screw-in fitting with clamping ring and check valve for tube Ø 6 mm |
| 519-318 26-1 | Device for external gathering of SSV outputs from outlet #1 and #2 |

Metering device

SSVL



Description

SSVL type metering device is a single block progressive metering device with larger tube diameters especially for heavy industry applications. Available with pin indicator for visual system monitoring or with piston detector for electrical system monitoring. Outlet combining elements for 2, 3, 4 and 5 outlets available.

Features and benefits

- Similar to SSV but with larger distances between the outlets for larger tube diameters
- Sizes 6 to 14 outlets
- High operating pressure
- Exact lubricant metering
- Optionally equipped with visual monitoring pin or with electrically monitored piston detector

Applications

- Heavy industry
- Construction machinery
- Vehicles

Technical data

| | |
|-----------------------|---|
| Function principle | block metering device |
| Operating temperature | -25 to +75 °C; -13 to +167 °F |
| Operating pressure | max. 350 bar; 5 075 psi |
| Outlets ¹⁾ | 6 to 14 |
| Lubricant | |
| grease: | up to NLGI 2 |
| oil: | at least 40 mm ² /s |
| Metering quantity | per cycle and outlet: 0,2 cm ³ ; 0.12 in ³ |
| Connection inlet | R 1/4 |
| Connection outlet | 8, 10 or 12 mm |
| Material | black chromated steel |
| Dimensions | min. 90 × 60 × 40 mm max. 210 × 60 × 40 mm min. 3.54 × 2.36 × 1.57 in max. 8.26 × 2.36 × 1.57 in |
| Mounting position | any |

¹⁾ To ensure metering device operation outlet 1 and 2 should never be closed by a closure plug

Metering device

SSVL

SSVL

| Outlets | Order number Standard | Visual pin | with bypass bore |
|---------|--------------------------|-------------|------------------|
| 6 | 619-77162-1 | 619-77231-1 | 619-77311-1 |
| 8 | 619-77163-1 | 619-77232-1 | 619-77312-1 |
| 10 | 619-77164-1 | 619-77233-1 | 619-77313-1 |
| 12 | 619-77165-1 | 619-77234-1 | 619-77314-1 |
| 14 | 619-77166-1 | 619-77235-1 | 619-77315-1 |


Accessories

Assemblies

| Order number | Designation |
|--------------|--|
| 519-34643-1 | double, assembly (incl. pos. 2x3, 1x5) |
| 519-34643-2 | triple, assembly (incl. pos. 3x3, 2x5) |
| 519-34643-3 | quadruple, assembly (incl. pos. 4x3, 3x5) |
| 519-34643-4 | quintuple, assembly (incl. po s. 5x3, 4x5) |

Metering device

VPK

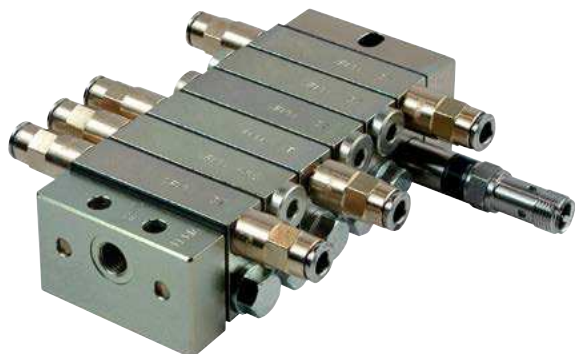

Description

The VPK type metering device is a sectional metering device. Its metering sections cover a metering volume per outlet and cycle of $0,05 \text{ cm}^3$ (T-section = 2 outlets) to $0,6 \text{ cm}^3$ (S-section = 1 outlet). All sections (inlet, intermediate, end) are tightened via tie rods. The delivery ducts are sealed by porting plates in-between the segments. A minimum of three intermediate sections is necessary.

Features and benefits

- Volumetric flow of up to $500 \text{ cm}^3/\text{min}$; $30.5 \text{ in}^3/\text{min}$
- Universal use in continuous or intermittent operation
- Metering sections with variable metering amount
- Internal consolidation of outlets
- Visual or electrical monitoring optional
- Safe sealing concept with porting plates

Applications

- Metal forming machines
- Vehicles
- Production machines of automotive industry
- Packaging machines
- Printing industry
- Construction and mining
- Farm machinery

Technical data

| | |
|--------------------------------|---|
| Function principle | sectional metering device |
| Operating temperature | -25 to $+90 \text{ }^\circ\text{C}$; -13 to $194 \text{ }^\circ\text{F}$ |
| Operating pressure | oil: 200 bar; 2 900 psi grease: 300 bar; 4 350 psi |
| Outlets | 6 to 20 |
| Lubricant | |
| grease | up to NLGI 2; |
| oil | viscosity min. $12 \text{ mm}^2/\text{s}$ |
| Metering quantity | per cycle and outlet: $0,05\text{--}0,6 \text{ cm}^3$; $0.003\text{--}0.037 \text{ in}^3$ |
| Material: | |
| inlet, separator and end plate | steel, galvanized/NBR |
| sections/piston plate | steel, galvanized |
| Connection inlet | VPKM/VPKG: $M10 \times 1/G 1/8$ |
| Connection outlet | VPKM/VPKG: $M10 \times 1/G 1/8$ |
| Dimensions | min. $81,9 \times 65 \times 34 \text{ mm}$ max. $195,3 \times 65 \times 34 \text{ mm}$ min. $3.22 \times 2.56 \times 1.34 \text{ in}$ max. $7.69 \times 2.56 \times 1.34 \text{ in}$ |
| Mounting position: | |
| on machines without vibration | any |
| on machines with vibration | piston position should 90° to machine's movement direction |

NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:
1-3015-EN, 951-230-008-EN



3D
skf-lubrication.partcommunity.com/3d-cad-models


Metering device

VPK

| | | | | | | | |
|---|--|--|--|--|---|--|-----------------------|
| Identification code | VPK | | | | X | | |
| Product series | | | | | | | |
| Connections | | | | | | | |
| M = M 10 x 1 inlet and outlet thread | | | | | | | |
| G = G 1/8 inlet and outlet thread | | | | | | | |
| Monitoring | | | | | | | |
| X = none | | | | | | | |
| 2 = 2-pin piston detector, M12x1 plug | | | | | | | |
| 3 = 3-pin piston detector, M12x1 plug (wire breaking detection) | | | | | | | |
| Y = cycle indicator, visual plunger rod ¹⁾ | | | | | | | |
| S = cycle indicator with holder and proximity switch M 12x1 ⁴⁾ | | | | | | | |
| G = cycle indicator with holder for proximity switch M12x1 (without proximity switch) ¹⁾ | | | | | | | |
| Position of monitoring device ²⁾ | | | | | | | |
| X = none | | | | | | | |
| A = left, section 1 | B = right, section 1 | | | | | | Q = left, section 8 |
| C = left, section 2 | D = right, section 2 | | | | | | S = left, section 9 |
| E = left, section 3 | F = right, section 3 | | | | | | U = left, section 10 |
| G = left, section 4 | H = right, section 4 | | | | | | R = right, section 8 |
| J = left, section 5 | K = right, section 5 | | | | | | T = right, section 9 |
| L = left, section 6 | M = right, section 6 | | | | | | V = right, section 10 |
| N = left, section 7 | P = right, section 7 | | | | | | |
| Mainline fitting ^{2) 3)} | | | | | | | |
| X = none | | | | | | | |
| G = VPKM/VPKG straight push-in connector Ø 6 mm | | | | | | | |
| | B = VPKM straight screw-in connector, tube Ø 6 mm (LL) | | | | | | |
| | C = VPKM/VPKG straight screw-in connector Ø 8 mm (LL) | | | | | | |
| Sections | | | | | | | |

... = to be configured in the section configurator below

| | | |
|---|---------------------------------|---|
| Section configurator ⁴⁾ | - | - |
| Section (minimum 3 sections) | | |
| Single | Twin | |
| D = 0,20 cm ³ /cycle | C = 0,10 cm ³ /cycle | |
| F = 0,40 cm ³ /cycle | E = 0,20 cm ³ /cycle | |
| H = 0,60 cm ³ /cycle | G = 0,30 cm ³ /cycle | |
| K = 0,80 cm ³ /cycle | J = 0,40 cm ³ /cycle | |
| M = 1,00 cm ³ /cycle | L = 0,50 cm ³ /cycle | |
| Q = 1,20 cm ³ /cycle | N = 0,60 cm ³ /cycle | |
| Outlet connector left | | |
| S = outlet closed by screw plug ⁵⁾ | | |
| X = outlet without fitting | | |
| Outlet connector right | | |
| S = outlet closed by screw plug ⁵⁾ | | |
| X = outlet without fitting | | |

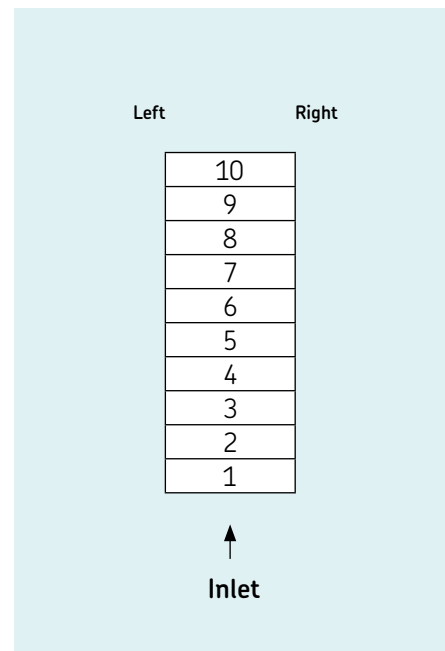

¹⁾ The installation of the cycle indicator is only possible from metering device section 2T and 2S, respectively!
²⁾ Solderless pipe unions with cutting sleeve acc. to DIN 2353
³⁾ LL-series = extra light version, L-series = light version, S-series = heavy-duty version
⁴⁾ Repeat this entry according to number of selected sections (1 to 10)
⁵⁾ Metering device only operates with one side (left or right) outlet closed per section

Metering device

VP



Description

The VP type metering device is a sectional metering device. Its metering sections cover a metering volume per outlet and cycle of 0,1 cm³ (T-section = 2 outlets) to 1,2 cm³ (S-section = 1 outlet). All sections (inlet, intermediate, end) are tightened via tie rods. The delivery ducts are sealed by porting plates in between the segments. A minimum of three intermediate sections is necessary.

Features and benefits

- Volumetric flow of up to 1,0 l/min; 61 in³/min
- Universal use in continuous or intermittent operation
- Metering sections with variable metering amount
- Internal and external consolidation of outlets
- Visual or electrical monitoring optional
- Ideal as main metering device
- All outlets with built-in, non-return valves

Applications

- Preferred master metering device
- Metal forming machines
- Vehicles, trucks
- Construction and mining
- Packaging machines
- General industry
- Farm machinery

Technical data

| | |
|--------------------------------|---|
| Function principle | sectional metering device |
| Outlets | 6 to 20 |
| Lubricant | up to NLGI 2; |
| grease | environmentally friendly mineral and synthetic oils; viscosity min. 12 mm ² /s |
| Metering quantity | per cycle and outlet: 0,1–1,2 cm ³ ; 0,006–0,073 in ³ |
| Flow rate | 1 l/min; 61 in ³ /min |
| Operating temperature | –25 to +90 °C; –13 to 194 °F |
| Operating pressure | oil: 200 bar; 2 900 psi grease: 300 bar; 4 350 psi |
| Material: | |
| inlet, separator and end plate | steel, galvanized/NBR |
| sections/piston plate | steel, galvanized |
| Connection inlet | VPM/VPG: M14 × 1,5 / G 1/4 VPM/VPG: M10 × 1 / G 1/8 |
| Connection outlet | |
| Protection class | IP 67 |
| Dimensions | min. 98 × 82,5 × 41 mm max. 238 × 82,5 × 41 mm min. 3.86 × 3.25 × 1.61 in max. 9.37 × 3.25 × 1.61 in |
| Mounting position: | |
| on machines without vibration | any |
| on machines with vibration | piston position should 90° to machine's movement direction |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

15400EN, 951-230-008 EN



3D

skf-lubrication.partcommunity.com/3d-cad-models

Metering device

VP

| | | | | | | | | | | | |
|--|--|--|--|--|--|---|--|--|--|---|--|
| Identification code | VP | | | | | A | | | | X | |
| Product series | | | | | | | | | | | |
| Connections | | | | | | | | | | | |
| <p>M = M14×1,5 inlet thread; M10×1 outlet thread</p> <p>G = G 1/4 inlet thread; G 1/8 outlet thread</p> | | | | | | | | | | | |
| Monitoring | | | | | | | | | | | |
| <p>X = none</p> <p>2 = 2-pin piston detector, M12×1 plug</p> <p>3 = 3-pin piston detector, M12×1 plug (wire breaking detection)</p> <p>Y = cycle indicator, visual (plunger rod) ¹⁾</p> | | | | | | | | | | | |
| Position of monitoring device ²⁾ | | | | | | | | | | | |
| <p>X = none</p> <p>A = left hand side, section 1</p> <p>C = left hand side, section 2</p> <p>E = left hand side, section 3</p> <p>G = left hand side, section 4</p> <p>J = left hand side, section 5</p> <p>L = left hand side, section 6</p> <p>N = left hand side, section 7</p> <p>Q = left hand side, section 8</p> <p>S = left hand side, section 9</p> <p>U = left hand side, section 10</p> | <p>B = right hand side, section 1</p> <p>D = right hand side, section 2</p> <p>F = right hand side, section 3</p> <p>H = right hand side, section 4</p> <p>K = right hand side, section 5</p> <p>M = right hand side, section 6</p> <p>P = right hand side, section 7</p> <p>R = right hand side, section 8</p> <p>T = right hand side, section 9</p> <p>V = right hand side, section 10</p> | | | | | | | | | | |
| Plug-on | | | | | | | | | | | |
| A = flow limiter SMB 8 with nominal volume up to 1,09 l/min; 2.3 pts/min | | | | | | | | | | | |
| Plug-in nozzle for flow limiter | | | | | | | | | | | |
| see PUB 1-3016 EN, p. 12 | | | | | | | | | | | |
| Inlet connector ^{2) 3)} | | | | | | | | | | | |
| <p>X = none</p> <p>A = VPM straight connector, tube Ø 6 mm (L)</p> <p>D = VPM straight connector, tube Ø 8 mm (S)</p> <p>E = VPM straight connector, tube Ø 10 mm (L)</p> <p>F = VPM straight connector, tube Ø 12 mm (L)</p> | <p>B = VPG straight connector, tube Ø 6 mm (S)</p> <p>C = VPG straight connector, tube Ø 8 mm (L)</p> <p>E = VPG straight connector, tube Ø 10 mm (L)</p> <p>F = VPG straight connector, tube Ø 12 mm (L)</p> | | | | | | | | | | |
| Sections | | | | | | | | | | | |
| ... = to be configured in the section configurator below | | | | | | | | | | | |

Section configurator ⁴⁾

| | |
|---------------------------------------|---------------------------------------|
| Section (minimum 3 sections) | |
| Single | Twin |
| B = 0,10 cm ³ /cycle (05S) | A = 0,05 cm ³ /cycle (05T) |
| D = 0,20 cm ³ /cycle (1S) | C = 0,10 cm ³ /cycle (1T) |
| F = 0,40 cm ³ /cycle (2S) | E = 0,20 cm ³ /cycle (2T) |
| H = 0,60 cm ³ /cycle (3S) | G = 0,30 cm ³ /cycle (3T) |

Outlet connection left


S = outlet closed by screw plug ⁵⁾

X = outlet without fitting

Outlet connection right

S = outlet closed by screw plug ⁵⁾

X = outlet without fitting

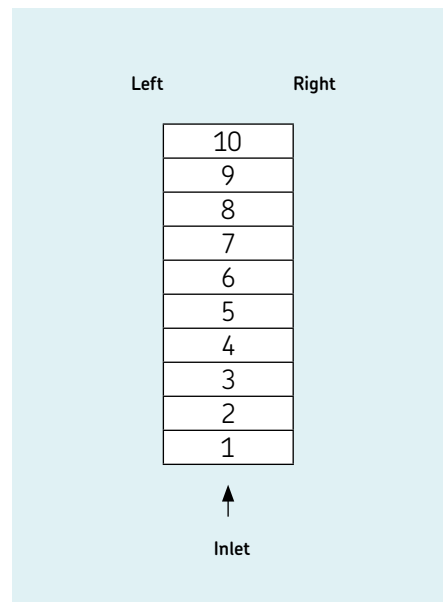

¹⁾ The installation of the cycle indicator is only possible for size 2 and bigger.
²⁾ Solderless pipe unions with cutting sleeve acc. to DIN 2353
³⁾ L-series = light version, S-series = heavy-duty version
⁴⁾ Repeat this entry according to number of selected sections (1 to 10)
⁵⁾ Metering device only operates with maximum one side (left or right) outlet closed per section

Metering device

PSG1



Description

The PSG1 is a progressive metering device consisting of a baseplate and different metering sections that can be individually combined for specific outlet ratios and cross portings. The ports are part of the baseplate, so that connectors and tubes remain in place when segments need to be changed.

Features and benefits

- Easy servicing as outlets are located on baseplate
- Flexible due to exchangeable metering segments
- Visual or electrical monitoring possible
- Dummy segments with no output available
- Adjustable by consolidating outlets internally or externally

Applications

- Automobile presses
- Paper machines
- Tunnel boring machines

Technical data

| | |
|----------------------------------|---|
| Function principle | segmented metering device |
| Outlets | 6 to 20 |
| Lubricant | grease: up to NLGI 2 oil: min. viscosity 12 mm ² /s |
| Metering quantity | per cycle and outlet: min. 0,05 cm ³ ; 0.003 in ³ max. 0,25 cm ³ ; 0.015 in ³ max. 0,8 l/min; 0.17 pts/min |
| Flow rate | |
| Operating temperature | -15 to +110 °C; +5 to 230 °F |
| Operating pressure ¹⁾ | 200 bar; 2 900 psi |
| Material | |
| baseplate: | aluminum alloy |
| sections: | steel galvanized |
| Connection inlet | G 3/8 |
| Connection outlet | G 1/4 |
| Protection class | IP 67 |
| Dimensions | min. 90 × 55 × 41 mm max. 244 × 55 × 41 mm min. 3.54 × 2.17 × 1.61 in max. 9.61 × 2.17 × 1.61 in |
| Mounting position: | |
| on machines without vibration | any |
| on machines with vibration | piston position should be 90° to machine's movement direction |

¹⁾ Operating pressure may be lower depending on design with monitoring or attachments

PSG1 accessories

| Order number | Designation |
|--------------|--|
| 466-419-001 | Closure plug for baseplate outlet incl. washer |
| 24-2151-3760 | Crossporting bridge, 2 outlets ¹⁾ |
| 24-2151-3762 | Crossporting bridge, 2 outlets, with outlet port ¹⁾ |
| 24-2151-3764 | Crossporting bridge, 2 outlets, with outlet port and check valve ¹⁾ |

¹⁾ bridges are approved for a maximum operating pressure of 100 bar; crossporting bridge also available for 3 outlets, see brochure



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

1-3010 EN; 951-230-013



3D

skf-lubrication.partcommunity.com/3d-cad-models


Metering device

PSG1

| | | | | | | |
|---|------|--|--|---|---|--|
| Identification code | PSG1 | | X | X | X | |
| Product series | | | | | | |
| Monitoring | | | | | | |
| <p>X = none</p> <p>3 = 3-pin piston detector, M12x1 plug</p> <p>Y = cycle indicator, visual plunger rod ^{1) 2)}</p> <p>S = cycle indicator with bracket and proximity switch ^{1) 2)}</p> <p>G = cycle indicator with bracket for proximity switch (without proximity switch) ^{1) 2)}</p> | | | | | | |
| Position of monitoring device ²⁾ | | | | | | |
| <p>X = none</p> <p>A = left, section 1 B = right, section 1</p> <p>C = left, section 2 D = right, section 2</p> <p>E = left, section 3 F = right, section 3</p> <p>G = left, section 4 H = right, section 4</p> <p>J = left, section 5 K = right, section 5</p> <p>L = left, section 6 M = right, section 6</p> <p>N = left, section 7 P = right, section 7</p> <p>Q = left, section 8 R = right, section 8</p> <p>S = left, section 9 T = right, section 9</p> <p>U = left, section 10 V = right, section 10</p> | | | | | | |
| Connector baseplate inlet ³⁾ | | | | | | |
| <p>X = none</p> <p>A = tube Ø 6 mm</p> | | | <p>B = tube Ø 8 mm</p> <p>C = tube Ø 10 mm</p> | | | |
| Sections | | | | | | |

... = to be configured in the section configurator below


| | |
|--|--|
| Section configurator | |
| Section (minimum 3 sections) ⁴⁾ | |
| <p>X = dummy section</p> <p>A = 0,05 cm³/cycle ⁵⁾</p> <p>C = 0,15 cm³/cycle</p> | <p>B = 0,10 cm³/cycle</p> <p>D = 0,20 cm³/cycle</p> <p>E = 0,25 cm³/cycle</p> |
| Outlet connector left | |
| <p>S = outlet closed by screw plug ⁶⁾</p> <p>X = outlet without fitting</p> | |
| Outlet connector right | |
| <p>S = outlet closed by screw plug ⁶⁾</p> <p>X = outlet without fitting</p> | |

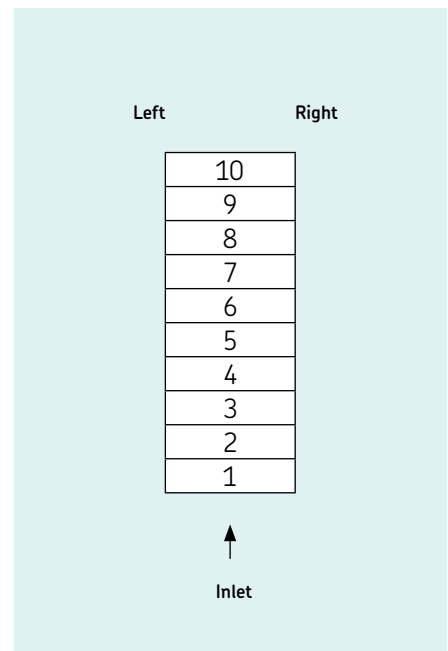

¹⁾ Only on 200 and 250 mm³ section sizes
²⁾ Installation on first or last section is not recommended
³⁾ Solderless pipe union with cutting sleeve per DIN 2353
⁴⁾ The volume per section is equal on both sides
⁵⁾ If possible, do not place in first position when designing metering device
⁶⁾ Metering device only operates with one side (left or right) outlet closed per section

Metering device

PSG2

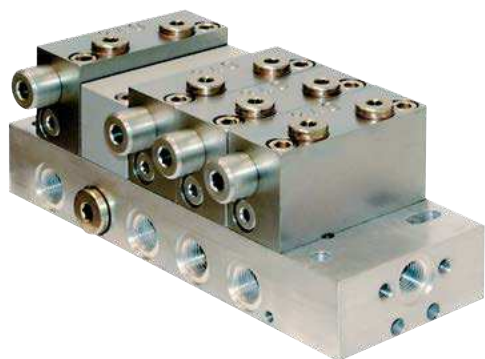

Description

The PSG2 is a progressive metering device consisting of a baseplate and different metering sections that can be individually combined for specific outlet ratios and cross portings. The ports are part of the baseplate, so that connectors and tubes remain in place when segments need to be changed.

Features and benefits

- Easy servicing due to outlet location
- Flexible with exchangeable metering segments
- Visual or electrical monitoring available
- Increased corrosion-resistant material offered
- Adjustable output by consolidating outlets internally or externally

Applications

- Automobile presses
- Tunnel boring machines
- Paper machines

Technical data

| | |
|----------------------------------|---|
| Function principle | segmented metering device |
| Operating temperature | -15 to +110 °C; +5 to +230 °F |
| Operating pressure ¹⁾ | 200 bar; 2 900 psi |
| Outlets | 6 to 20 |
| Lubricant | grease: up to NLGI 2 oil: min. viscosity of 12 mm ² /s |
| Metering quantity | per cycle and outlet: min. 0,06 cm ³ ; 0.0037 in ³ max. 0,84 cm ³ ; 0.051 in ³ max. 2,5 l/min; 5.3 pts/min |
| Flow rate | |
| Material | |
| baseplate: | aluminium alloy or anodized |
| sections: | steel or nickel plated |
| Connection inlet | G 1/4 |
| Connection outlet | G 1/4 |
| Protection class | IP67 |
| Dimensions | min. 131 × 86 × 71 mm max. 327 × 86 × 71 mm min. 5.16 × 3.39 × 2.80 in max. 12.87 × 3.39 × 2.80 in |
| Mounting position: | |
| on machines without vibration | any |
| on machines with vibration | piston position should be 90° to machine movement direction |
| Options | flow limiter |

¹⁾ Operating pressure may be lower depending on design with monitoring or attachments

PSG2 accessories

| Order number | Designation |
|--------------|--|
| 466-419-001 | Closure plug for baseplate outlet incl. washer |
| 24-2151-3760 | Crossporting bridge, 2 outlets ¹⁾ |
| 24-2151-3762 | Crossporting bridge, 2 outlets, with outlet port ¹⁾ |
| 24-2151-3764 | Crossporting bridge, 2 outlets, with outlet port and check valve ¹⁾ |

¹⁾ Bridges are approved for a maximum operating pressure of 100 bar; crossporting bridge also available for 3 outlets, see brochure



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

1-3010 EN; 951-230-01




3D

skf-lubrication.partcommunity.com/3d-cad-models

Metering device

PSG3

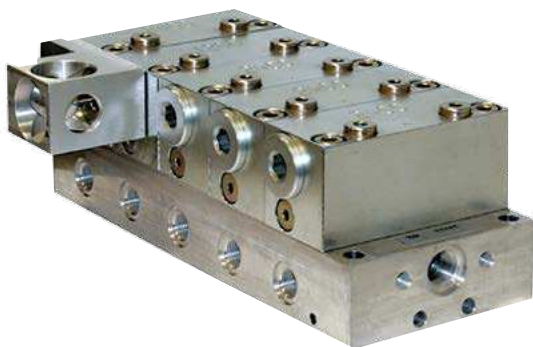

Description

The PSG3 is a progressive metering device consisting of a baseplate and different metering sections that can be individually combined for specific outlet ratios and cross portings. The ports are part of the baseplate, so that connectors and tubes remain in place when segments need to be changed.

Features and benefits

- Easy servicing as outlets are located on baseplate
- Flexible with exchangeable metering segments
- Visual or electrical monitoring available
- Increased corrosion-resistant material available
- Dummy segments without output available
- Adjustable output by consolidating outlets internally or externally
- Main metering device in circulating oil systems

Applications

- Automobile presses
- Paper machines
- Tunnel boring machines

Technical data

| | |
|----------------------------------|---|
| Function principle | segmented metering device |
| Operating temperature | -15 to +110 °C; +5 to +230 °F |
| Operating pressure ¹⁾ | 200 bar 2 900 psi |
| Outlets | 6 to 20 |
| Lubricant | grease up to NLGI 2 oil: min. viscosity 12 mm ² /s |
| Metering quantity | per cycle and outlet: min. 0,80 cm 0.049 in max. 3,20 cm 0.195 in max. 6 l/min; 12.7 pts/min |
| Flow rate | |
| Material baseplate: | aluminium alloy or anodized |
| sections: | steel galvanized or nickel plated |
| Connection inlet | G 3/8 |
| Connection outlet | G 1/4 |
| Protection class | IP 67 |
| Dimensions | min. 165 × 108 × 88 mm max. 466 × 108 × 88 mm min. 6.50 × 4.25 × 3.46 in max. 18.35 × 4.25 × 3.46 in |
| Mounting position: | |
| on machines without vibration | any |
| on machines with vibration | piston position should be 90° to machine's movement direction |
| Options | flow limiter |

¹⁾ Operating pressure may be lower depending on design with monitoring or attachments

PSG3 accessories

| Order number | Designation |
|-----------------|--|
| DIN908-R1-4-5.8 | closure plug for baseplate outlet |
| 508-108 | washer for closure plug |
| 24-2151-3734 | crossporting bridge, 2 outlets ¹⁾ |
| 24-2151-3736 | crossporting bridge, 2 outlets with outlet ports ¹⁾ |

¹⁾ bridges are approved for a maximum operating pressure of 100 bar; crossporting bridge also available for 3 outlets, see brochure

NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:
1-3010 EN; 951-230-013



3D

skf-lubrication.partcommunity.com/3d-cad-models


Metering device

PSG3

| | | | | | | | | | | | |
|---|---|---|---|---|--|--|--|--|--|--|--|
| Identification code | PSG3 | X | X | X | | | | | | | |
| Product series | | | | | | | | | | | |
| Monitoring | <p>X = none 3 = 3-pin piston detector, M12x1 plug Y = cycle indicator, visual plunger rod ¹⁾ S = cycle indicator with bracket and proximity switch ¹⁾ G = cycle indicator with bracket for proximity switch (without proximity switch) ¹⁾</p> | | | | | | | | | | |
| Position of monitoring device ²⁾ | <p>X = none A = left, section 1 B = right, section 1 C = left, section 2 D = right, section 2 E = left, section 3 F = right, section 3 G = left, section 4 H = right, section 4 J = left, section 5 K = right, section 5 L = left, section 6 M = right, section 6 N = left, section 7 P = right, section 7 Q = left, section 8 R = right, section 8 S = left, section 9 T = right, section 9 U = left, section 10 V = right, section 10</p> | | | | | | | | | | |
| Connector baseplate inlet ²⁾ | <p>X = none D = tube Ø 12 mm B = tube Ø 8 mm E = tube Ø 15 mm C = tube Ø 10 mm F = tube Ø 16 mm</p> | | | | | | | | | | |
| Sections | | | | | | | | | | | |

... = to be configured in the section configurator below


| | | |
|--|---|---|
| Section configurator | - | - |
| Section (minimum 3 sections) ³⁾ | <p>X = dummy section R = 1,60 cm³/cycle P = 0,80 cm³/cycle ⁴⁾ S = 2,40 cm³/cycle Q = 1,20 cm³/cycle T = 3,20 cm³/cycle</p> | |
| Outlet fitting left | <p>S = outlet closed by screw plug ⁵⁾ X = outlet without fitting</p> | |
| Outlet fitting right | <p>S = outlet closed by screw plug ⁵⁾ X = outlet without fitting</p> | |

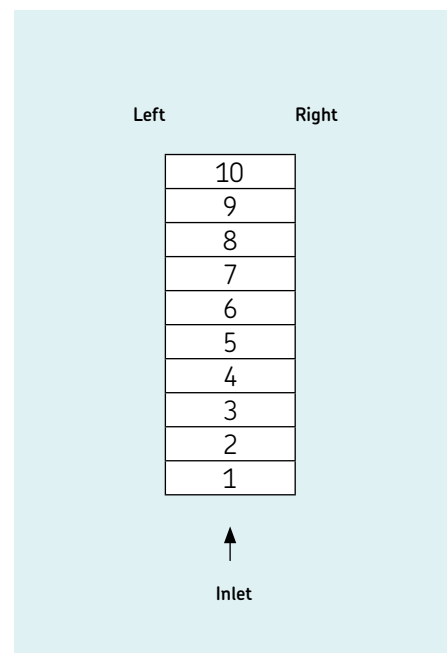

¹⁾ Installation on first or last section is not recommended
²⁾ Solderless pipe union with cutting sleeve per DIN 2353
³⁾ The volume per section is equal on both sides
⁴⁾ If possible, do not place in first position when designing metering device
⁵⁾ Metering device only operates with one side (left or right) outlet closed per section

Metering device

UV

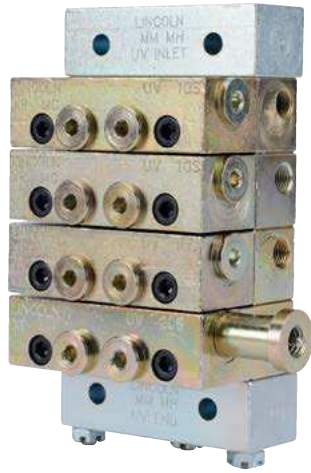

Description

UV metering devices are modular type metering devices. They consist of a baseplate part and a metering sections part. The baseplate has one inlet, three to eight intermediate, one end section held via three tie rods. The metering sections part consists of three to eight metering sections (depending on number of outlets needed) which are fixed on the baseplate part. All parts have FKM O-ring seals in-between. There must be a minimum of three metering sections. The metering sections will have either single or twin outlets. Whenever a single metering segment or crossport plate is used, the unused outlet must be plugged. Metering device has to be ordered in single parts, see chart.

Feature and benefits

- Alternate outlet ports for performance indicators
- Optional metering sections with visual cycle indicator
- Optional by-pass metering segment for addition or deletion of lubrication points

Applications

- Industrial machinery
- Metal forming machines
- Material handling machines



Technical data

| | |
|-----------------------|--|
| Function principle | sectional metering device |
| Operating temperature | -26 to +200 °C; -15 to +400 °F |
| Operating pressure | max. 240 bar: 3 500 psi |
| Outlets | 6 to 16 |
| Lubricant | NLGI 0 to 2 |
| oil and grease | per cycle and outlet: min. 0,082 cm ³ ; 0.005 in ³ max. 1,311 cm ³ ; 0.08 in ³ |
| Metering quantity | |
| Material: | |
| housing | zinc plated steel |
| seals | FKM |
| Connection inlet | 1/4 NPSF (F) |
| Connection outlet | 1/8 NPSF (F) |
| Dimensions | min. 115 × 76 × 57 mm max. 232 × 76 × 57 mm min. 4.52 × 3 × 2.25 in max. 9.13 × 3 × 2.25 in |
| Mounting position | any |

¹⁾ It is possible to reduce the number of outlets below the given minimum by crossporting or closing outlets.

Metering device

UV

UV baseplate and tie rod specifications ¹⁾

| Outlets | Inlet section Order number | End section | Tie rod ¹⁾ | Intermediate section Order number | Intermediate section quantity required | Metering valves quantity required |
|---------|-------------------------------|--------------|-----------------------|--------------------------------------|---|--------------------------------------|
| 6 | 87918 | 87920 | 250290 | 87919 | 3 | 3 |
| 8 | 87918 | 87920 | 250291 | 87919 | 4 | 4 |
| 10 | 87918 | 87920 | 250292 | 87919 | 5 | 5 |
| 12 | 87918 | 87920 | 250293 | 87919 | 6 | 6 |
| 14 | 87918 | 87920 | 250294 | 87919 | 7 | 7 |
| 16 | 87918 | 87920 | 250295 | 87919 | 8 | 8 |

¹⁾ each tie rod model no. includes three tie rods and three fastening nuts

UV metering valve- single outlet S

| Order number Standard | Right side cycle indicator | Designation | Metering quantity per outlet | |
|--------------------------|-------------------------------|-------------|---------------------------------|-----------------|
| | | | cm ³ | in ³ |
| 882051 | – | 05S | 0,164 | 0.010 |
| 882101 | – | 10S | 0,328 | 0.020 |
| 882151 | – | 15S | 0,492 | 0.030 |
| 882201 | 882203 | 20S | 0,656 | 0.040 |
| 882251 | 882253 | 25S | 0,820 | 0.050 |
| 882301 | 882303 | 30S | 0,983 | 0.060 |
| 882351 | 882353 | 35S | 1,147 | 0.070 |
| 882401 | 882403 | 40S | 1,311 | 0.080 |

UV metering valve - twin outlet T

| Order number Standard | Right side cycle indicator | Designation | Metering quantity per outlet | |
|--------------------------|-------------------------------|-------------|---------------------------------|-----------------|
| | | | cm ³ | in ³ |
| 882052 | – | 05T | 0,082 | 0.05 |
| 882102 | – | 10T | 0,164 | 0.10 |
| 882152 | – | 15T | 0,246 | 0.15 |
| 882202 | 882204 | 20T | 0,328 | 0.20 |
| 882252 | 882254 | 25T | 0,410 | 0.25 |
| 882302 | 882304 | 30T | 0,492 | 0.30 |
| 882352 | 882354 | 35T | 0,574 | 0.35 |
| 882402 | 882404 | 40T | 0,656 | 0.40 |

Model 882000 UV by pass block optional:
by-pass block permits addition or deletion of lubrication points without disturbing existing installations. Includes mounting screws and NBR seals.

Plug and crossporting

| Order number | Designation |
|--------------|--------------------------|
| 68645 | closure plug |
| 87905 | single and crossport kit |

Description

Closure plug to plug non-working outlets. External crossport kit connects alternate outlet ports to combine the volume of two metering segments through a single outlet.

Relief and performance indicators

| Order number | Type | Disc colour | Pressure rating | |
|--------------|--------------------|----------------|-----------------|-------|
| | | | bar | psi |
| 87934 | atmospheric relief | yellow | 100 | 1 450 |
| 87935 | atmospheric relief | red | 120 | 1 750 |
| 87936 | atmospheric relief | purple | 225 | 3 250 |
| 87937 | atmospheric relief | yellow/natural | 255 | 3 700 |
| 87938 | reset-type | – | 35 | 500 |
| 87939 | reset-type | – | 70 | 1 000 |
| 87940 | reset-type | – | 10 | 1 500 |
| 87941 | reset-type | – | 140 | 2 000 |
| 87942 | reset-type | – | 205 | 3 000 |

Description

Atmospheric safety relief indicators. High pressure rupture disc, pressure and lubricant vents to the atmosphere. Reset-type Performance Indicators. High pressure extends indicator. Reset indicator after pressure is relieved. All with thread 1/8 NPTF (M).

Metering device

MC2-HP



Description

MC2-HP metering devices are modular type metering devices consisting of a baseplate part containing all inlet and outlet connections and a metering sections part containing alternate outlet ports for installation of performance indicators. The baseplate part has one inlet, three to eight intermediate and one end section hold via three tie rods. The metering sections part consists of three to eight metering sections (depending on number of outlets needed) which are fixed on the baseplate part. All parts have FKM O-ring seals in-between. There must be a minimum of three metering sections. The metering sections will have either single or twin outlets. Whenever a single metering segment or crossport plate is used, the unused outlet must be plugged. Metering device has to be ordered in single parts, see chart.

Feature and benefits

- Alternate outlet ports for performance indicators
- For mineral oil based or synthetic lubricants
- Optional metering sections with visual cycle indicator
- Optional by-pass metering segment for addition or deletion of lubrication points

Applications

- Gas engines
- Compressors
- For applications with high system back pressure

Technical data

| | |
|-----------------------|---|
| Function principle | sectional metering device |
| Operating temperature | -26 to +200 °C; -15 to +400 °F |
| Operating pressure | max. 510 bar; 7 500 psi |
| Outlets | 6 to 16 |
| Lubricant | mineral and synthetic oil or grease NLGI 0 to 2 |
| Metering quantity | per cycle and outlet: min. 0,098 cm ³ ; 0.006 in ³ max. 0,787 cm ³ ; 0.048 in ³ |
| Material: | |
| housing | black chromate plated steel |
| seals | FKM |
| Connection inlet | 1/4 NPSF (F) |
| Connection outlet | 1/8 NPSF (F) |
| Dimensions | min. 129 × 86 × 48 mm max. 245 × 86 × 48 mm min. 5.09 × 3.38 × 1.87 in max. 9.63 × 3.38 × 1.87 in |
| Mounting position | any |

¹⁾ It is possible to reduce the number of outlets below the given minimum by crossporting or closing outlets.

Metering device

MC2-HP

MC2-HP modular design

| Outlets | Inlet section Order number | End section | Tie rod | Tie rod quantity required | Intermediate section Order number | Intermediate section quantity required | Metering valves quantity required |
|---------|-------------------------------|--------------|---------------|------------------------------|--------------------------------------|---|--------------------------------------|
| 6 | 87955 | 87956 | 236640 | 3 | 87957 | 3 | 3 |
| 8 | 87955 | 87956 | 236641 | 3 | 87957 | 4 | 4 |
| 10 | 87955 | 87956 | 236642 | 3 | 87957 | 5 | 5 |
| 12 | 87955 | 87956 | 236644 | 3 | 87957 | 6 | 6 |
| 14 | 87955 | 87956 | 236645 | 3 | 87957 | 7 | 7 |
| 16 | 87955 | 87956 | 236646 | 3 | 87957 | 8 | 8 |

Note: use 68645 closure plug (1/8 NPT) to plug non-working outlets. Each 87956 end section contains 3 tie rod nuts

MC2-HP Metering valves single outlet

| Order number Standard | W/right side cycle indicator | Designation | Metering quantity | |
|--------------------------|---------------------------------|-------------|-------------------|-----------------|
| | | | cm ³ | in ³ |
| 876061 | • | 06S | 0,196 | 0.196 |
| 876091 | • | 09S | 0,295 | 0.295 |
| 876121 | 876123 | 12S | 0,393 | 0.393 |
| 876181 | 876183 | 18S | 0,590 | 0.590 |
| 876241 | 876243 | 24S | 0,787 | 0.787 |

MC2-HP Metering valves twin outlet

| Order number Standard | W/right side cycle indicator | Designation | Metering quantity | |
|--------------------------|---------------------------------|-------------|-------------------|-----------------|
| | | | cm ³ | in ³ |
| 876062 | • | 06T | 0,98 | 0.098 |
| 876092 | • | 09T | 0,147 | 0.147 |
| 876122 | 876124 | 12T | 0,197 | 0.197 |
| 876182 | 876184 | 18T | 0,295 | 0.295 |
| 876242 | 876244 | 24T | 0,393 | 0.393 |

Accessories

Outlet combinations

| Order number | Designation |
|----------------|--------------------------|
| 1068645 | closure plug |
| 87905 | single and crossport kit |

Relief and performance indicators

| Order number | Type | Colour | Pressure rating | |
|--------------|-------|--------|-----------------|-------|
| | | | bar | psi |
| 87895 | pin | yellow | 110 | 1 450 |
| 87896 | pin | red | 120 | 1 750 |
| 87897 | pin | orange | 140 | 2 050 |
| 87885 | reset | green | 70 | 1 000 |
| 87886 | reset | yellow | 100 | 1 500 |
| 87887 | reset | red | 140 | 2 000 |
| 87888 | reset | orange | 170 | 2 500 |
| 87889 | reset | blue | 205 | 3 000 |

Description

Closure plug to plug non-working outlets. External crossport kit connects alternate outlet ports to combine the volume of two metering segments through a single outlet.

Description

Pin type performance indicators where high pressure ruptures internal disc and extends indicator. Reset-type indicator where high pressure extends indicator and resets after pressure is relieved. O-rings are FKM for both types.

Metering device

XL



Description

XL metering devices are modular type metering devices. They consist of a baseplate as one piece and a modular metering sections part. The baseplate contains all inlet and outlet connections. The metering sections part consists of three to six metering sections (depending on number of outlets needed) which are fixed on the baseplate part. All parts have NBR-ring seals in-between. There must be a minimum of three metering sections. The metering sections will have either single or twin outlets. Whenever a single metering segment or a crossport or a singling plate is used, the unused outlet must be plugged. Metering device has to be ordered in single parts, see chart.

Feature and benefits

- Several sizes and outputs
- Can be used as primary metering device in conjunction with UV type
- Baseplate as one single piece

Applications

- Metal cutting machines
- Metal forming machines
- Wood-working machines
- Material handling machinery

Technical data

| | |
|-----------------------|---|
| Function principle | segmented metering device |
| Operating temperature | 0 to +120 °C; +35 to 250 °F |
| Operating pressure | max. 170 bar; 2500 psi |
| Outlets | 6 to 12 |
| Lubricant | oil and grease |
| Metering quantity | NLGI 0 to 2 |
| | per cycle and outlet: |
| | min. 0,492 cm ³ ; 0.03 in ³ |
| | max. 4,92 cm ³ ; 0.3 in ³ |
| Material: | |
| housing | zinc plated steel |
| seals | NBR |
| Connection inlet | 1/4 NPTF (F) |
| Connection outlet | 1/8 NPTF (F) |
| Dimensions | min. 136 × 127 × 70 mm |
| | max. 238 × 127 × 70 mm |
| | min. 5.34 × 5 × 2.75 in |
| | max. 9.38 × 5 × 2.75 in |
| Mounting position | any |

¹⁾ It is possible to reduce the number of outlets below the given minimum by crossporting or closing outlets.

Metering device

XL

XL metering valve- single outlet S

| Order number Standard | Designation | Metering quantity per outlet | |
|--------------------------|-------------|---------------------------------|-----------------|
| | | cm ³ | in ³ |
| 87026-03S | 30S | 0,983 | 0.60 |
| 87026-05S | 50S | 1,64 | 0.100 |
| 87026-08S | 80S | 2,62 | 0.160 |
| 87026-10S | 100S | 3,28 | 0.200 |
| 87026-12S | 120S | 3,93 | 0.240 |
| 87026-15S | 150S | 4,92 | 0.300 |

XL metering valve - twin outlet T

| Order number Standard | Designation | Metering quantity per outlet | |
|--------------------------|-------------|---------------------------------|-----------------|
| | | cm ³ | in ³ |
| 87026-03T | 30T | 0,492 | 0.030 |
| 87026-05T | 50T | 0,820 | 0.050 |
| 87026-08T | 80T | 1,31 | 0.080 |
| 87026-10T | 100T | 1,64 | 0.100 |
| 87026-12T | 120T | 1,97 | 0.120 |
| 87026-15T | 150T | 2,46 | 0.150 |

Note: Model 87028 XL by-pass block:
optional by-pass block permits addition or deletion of lubrication points without disturbing existing installations. Includes mounting screws and FKM seals.

XL baseplate specifications

| Order number | Outlets max. | Metering devices |
|----------------|--------------|------------------|
| 87030-3 | 6 | 3 |
| 87030-4 | 8 | 4 |
| 87030-6 | 12 | 6 |

Note:
Use No. 67359 closure plug (1/4 NPT) to plug non-working outlets.

Accessories

Outlet combinations

| Order number | Designation |
|--------------|---------------|
| 67359 | closure plug |
| 87823 | crossport kit |
| 87824 | singling kit |

Relief and performance indicators

| Order number | Type | Disc colour | Pressure rating | |
|--------------|--------------------|----------------|-----------------|-------|
| | | | bar | psi |
| 87934 | atmospheric relief | yellow | 100 | 1 450 |
| 87935 | atmospheric relief | red | 120 | 1 750 |
| 87936 | atmospheric relief | purple | 225 | 3 250 |
| 87937 | atmospheric relief | yellow/natural | 255 | 3 700 |
| 87938 | reset-type | – | 35 | 500 |
| 87939 | reset-type | – | 70 | 1 000 |
| 87940 | reset-type | – | 10 | 1 500 |
| 87941 | reset-type | – | 140 | 2 000 |
| 87942 | reset-type | – | 205 | 3 000 |

Description

Closure plug to plug non-working outlets. External crossport kit connects alternate outlet ports to combine the volume of two metering segments through a single outlet.

Description

Atmospheric safety relief indicators. High pressure rupture disc, pressure and lubricant vents to the atmosphere. Reset-type performance indicators. High pressure extends indicator. Reset indicator after pressure is relieved. All with thread 1/8 NPTF(M).



Overview of control units

| Control units | | | | | | | | |
|------------------------|---|---|---------|------------------|----------------------|----------------------|--------------------------|------------|
| Product | Function type | Designation | Voltage | | Lubrication channels | Temperature | | Page |
| | | | V DC | V AC | | °C | °F | |
| LMC 101 | Universal control and monitoring device | Universal control and monitoring device for progressive systems | 12, 24 | – | 1 | –40 to +65 | –40 to +150 | 112 |
| LMC 2 | Electronic controller | Programmable for all kind of lubrication systems: time- or cycle- dependent lubrication | 24 | 230 | 2 | –10 to +70 | +14 to 158 | 113 |
| LMC 301 | Lubrication monitor controller | Can handle up to 3 pumps and various types of lubrication systems. Function keys with menu display | 24 | 90-264 | 3 | –40 to +70 | –40 to +158 | 114 |
| EOT 2 | Control and monitoring device | Easy time controller for lubrication pumps in progressive systems | 12, 24 | – | 1 | –25 to +70 | –13 to +158 | 116 |
| IG 502 | Universal electronic controller | Programmable for progressive lubrication systems: time- or cycle- dependent lubrication, with timer, counter or monitoring function for pressure or cycle switches | 12, 24 | – | 1 | –25 to +75 | –13 to +167 | 117 |
| LC502 | Controller | Controller programmable for single-, dual-line and progressive lubrication systems | 24 | 230; 400 3-phase | 3 | 0 to +60 | +32 to 140 | 118 |
| EXZT/IGZ51 | Universal electronic controller and monitoring device | Universal control and monitoring device for stationary industrial application installed in a switching cabinet | – | 100–240 | 1 | 0 to +60 0 to +60 | +32 to 140 +32 to 140 | 120 120 |
| ST-102 | Lubrication control center | Can be used within single-, dual-line or progressive lubrication systems. Includes a user interface for monitoring and controlling the lubrication system | 12, 24 | – | 1 | –40 to +80 | –40 to +176 | 122 |
| ST-1240-Graph-4 | Lubrication control center | Can handle four channels, single-, dual-line or progressive lubrication systems. Configuration can be set in the field by the alphanumeric touchscreen display. Pressure switches, pressure transmitters or piston detectors can be used in both channels | – | 93–132, 186–264 | 4 | 0 to +50 | +32 to +122 | 123 |
| ST-2240-LUB | Lubrication control center (modular) | This modular control centre can operate 1 to 14 channels of single-line, dual-line and progressive lubrication systems. Configuration can be set in the field by touchscreen display. | – | 93–132, 186–264 | 1–14 | 0 to +50 | +32 to +122 | 124 |
| LRM 2 | Control unit with remote control | The LRM2 can communicate with a pump or group of pumps on the same type of lubrication system. LRM utilizes a SIM card to send and receive text messages that allow system control. | 12/24 | – | 1–3 | –30 to +70 | –22 to +158 | 126 |

LMC 101



Description

The LMC101 is a universal control and monitoring device suitable for single-line and progressive lubrication systems. Designed for off-road and mobile equipment only in drivers cabin use or industrial indoor use, this controller also can be utilized for any low-voltage lubrication application. Time or controller mode can be set for both systems. The LMC 101 must be programmed via USB connection to a PC. In timer mode, the lubrication cycle ends when the pre-assigned time has expired. In controller mode, the lubrication cycle ends when the pressure switch, pressure transducer or piston detector actuates. The system allows pressure to dissipate to the end of the supply line once pressure at the pump is reached.

Feature and benefits

- For 12 and 24 V DC systems
- Time or controller mode
- Various alarm condition settings
- Programming, data logging, and reporting
- Controller must be programmed via USB connection to PC
- Manual lubrication pushbutton

Applications

- Off-road equipment
- Mobile equipment
- Indoor industrial machinery
- Food and beverage industry
- Single-line and progressive systems

Technical data

| | |
|-----------------------|-------------------------------|
| Function principle | control and monitoring device |
| Operating temperature | -40 to +66 °C; -40 to +150 °F |
| Input | 12 and 24 V DC, -20% / +30% |
| Pump relay contact | 20 A at 30 V DC |
| Vent relay contact | 2 A at 30 V DC |
| Alarm relay contact | 2 A at 30 V DC |
| Enclosure rating | NEMA 12 |
| Off time (adjustable) | 15 sec to 99 h |
| On time (adjustable) | 15 sec to 99 h |
| Protection class | IP 52 |
| Dimensions | 186 × 120 × 59 mm |
| Mounting position | 7.3 × 4.7 × 2.3 in any |

LMC 101

| Order number | Designation |
|--------------|-------------|
|--------------|-------------|

| | |
|--------------|--|
| 86535 | Single line and progressive lubrication controller |
|--------------|--|

NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:
15556 EN, 15625 EN

Control units

LMC 2



Description

The LMC 2 is a controller for the electronic management and monitoring of lubrication systems. It combines the advantages of a specially developed printed circuit board (PCB) and a PLC in an economical, compact unit. For progressive systems, it controls the pump unit and the metering devices.

Feature and benefits

- Integrated, flexible lubrication programs
- 8 inputs / 5 outputs; suitable for complex lubrication systems
- Time- or cycle-dependent control of lubrication intervals
- Can be interfaced with common field bus systems

Applications

- General lubrication systems with a pump and pulse generator
- Railway
- Food and beverage
- ChaLMCin lubrication systems like Lincoln Cobra and PMA
- Multi-line as well as dual-line, single-line and progressive systems

Technical data

| | |
|-----------------------|--|
| Function principle | control and monitoring device |
| Operating temperature | -10 to +70 °C, -14 to +158 °F |
| Supply voltage | 12 or 24 V DC |
| Inputs | max. 8 digital inputs |
| Outputs | 4 relay outputs, 1 electronic |
| Operating voltage | depending on model: 230 V AC, 24 V DC (± 10%) |
| Standard | CE |
| Protection class | IP 54 |
| Dimensions | 200 × 120 × 90 mm, 7.9 × 4.7 × 3.5 in |
| Mounting position | any |

LMC2

| Order number | Description |
|--------------|-------------|
|--------------|-------------|

| | |
|--------------------|--------------------------|
| 236-10567-6 | LMC 2; 230 AC (230 V AC) |
|--------------------|--------------------------|

| | |
|--------------------|------------------------|
| 236-10567-5 | LMC 2; 24 DC (24 V DC) |
|--------------------|------------------------|

For use with electric operated 3-phase pump must order motor starter separately.

NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:

14004 EN

Control unit

LMC 301



Description

The LMC 301 is a compact, modularly expandable control and monitoring device. It is equipped with an LCD display and six functional keys for programming, parameter setting and signalization. The user is guided through the setup menu. Additionally, there is simple-to-use PC software for parameter setting and diagnostics available.

Feature and benefits

- Integrated, flexible lubrication programs
- Main device with 10 digital inputs, for 3 lubrication pumps and max. 6 pulse transmitters
- Up to 7 slave/extension with additional inputs for max. 10 pulse transmitters
- Three lubrication pumps can be controlled and monitored
- Can connect the digital grease flow detectors 800030 or the universal pulse generators

Applications

- General and heavy industry
- Steel industry
- Mining – stationary and mobile excavators
- Food and beverage
- Multi-, dual-, single-line and progressive systems

Technical data

| | |
|-----------------------|--|
| Function principle | control and monitoring device |
| Operating temperature | VAC: -10 to + 50 °C; +14 to 122 °F VDC: -40 to +70°C; -40 to 158 °F |
| Inputs | 10 count, short-circuit proof, 2 with analog |
| Outputs | 8 count, relay outputs NO-contact 8 A, 2 of which up to 15 A |
| Operating voltage | depending in model 100-240 VAC, 24 VDC ±20% |
| Standard | CE; UL; CSA |
| Protection class | IP 65 |
| Dimensions | 270 × 170 × 90 mm 10.7 × 6.7 × 3.5 in |
| Mounting position | vertical |

LMC 301

| Order number | Designation |
|--------------|-------------|
|--------------|-------------|

| | |
|---------------|---------------------------------------|
| 086500 | LMC 301; 24 V DC, master |
| 086501 | LMC 301; 100-240 VAC, master |
| 086502 | LMC 301; 24 V DC, I/O board, slave |
| 086503 | LMC 301; 100-240 AC, I/O board, slave |

NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:

15967 EN, 951-150-029 EN

LMC 301 - Accessories



LMC 301 motor relay assembly

| Order number | Description |
|--------------|------------------------------|
| 236-10850-7 | with motor starter 0,4–0,6 A |
| 236-10850-8 | with motor starter 0,6–1,0 A |
| 236-10850-9 | with motor starter 1,0–1,6 A |
| 236-10980-6 | with motor starter 2,4–4,0 A |

LMC 301 housing

| Order number | Description |
|--------------|------------------------|
| 086504 | door housing, complete |
| 086505 | cable USB |

Order numbers

| Order number | Description |
|--|---|
| 086506 086507 | PG-M20 Cable gland kit, IP 65 Multiple cable gasket set (3 x) Cable gasket set (3 x) |
| 3515-10-6020 3515-10-6620 | Cable glands PG-M20; complete, with cap nut, cable gasket set, screw plug cartridge Cable gasket set; 2-wire, Ø 0.6 mm Cable gasket set; 4-wire, Ø 0.5 mm |
| 3515-10-7620 3515-10-6320 3515-10-6120 | Blind plug Gasket Counter nut |
| 3515-07-6120 3515-10-2021 3515-07-2022 179-990-486 236-11066-1 | Conduit glands, IP 65, with flexible metal tube (FMC), UL approved Conduit glands AMG-M 20 x 1,5; UL 514B Counter nut M 20 x 1,5 Protection hose, liquid-proof protective; UL 360 (sold by the metre, when ordering specify the required length) Fuse, blade-type, FK1 3A (32 V) according to ISO 8820-3 Battery, 3 V lithium button cell, model CR3032 |
| www.skf.com/LMC301 | LMC 301 software, free download |

¹⁾ The installation of the cable glands and cable sets to be provided and done by the customer. The customer is responsible for proper installation.

Control units

EOT-2



Description

The EOT-2 controller is designed to control lubrication pumps during interval operation in multi-line systems. Rotary switches on the printed circuit board may be used to adjust lubrication time in seconds or minutes and pause time in minutes or hours. The EOT-2 is suitable for retrofit installation and often is used when a lubrication pump has no integrated control unit. Additional lubrication cycles can be triggered via a pushbutton.

Feature and benefits

- Easy-to-use controller for installation and outdoor
- Suitable for retrofit
- Easy time setting and function control

Applications

- Lubrication pumps without integrated controller
- Agricultural machinery, chain lubrication systems
- Simple lubrication systems in machines
- In connection with motor relay assembly; also preferred for three-phase multi-line pump units



NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:
951-181-005 EN

Technical data

| | |
|-----------------------|---|
| Function principle | control and monitoring device |
| Operating temperature | -25 to +70 °C, -13 to +158 °F |
| Supply voltage | 12 or 24 V DC |
| Current draw | max. ≤ 7 A |
| Outputs | transistor / N.O. |
| Pause time | min. 4 min max. 15 h |
| Running time | min. 8 sec max. 30 min |
| Standard | CE |
| Protection class | IP 65 |
| Dimensions | 122 × 118 × 56 mm, 4.80 × 4.65 × 2.00 in |
| Mounting position | any |

EOT-2 controller including motor relay and housing IP 57

| Order number | Description |
|--------------|-------------|
|--------------|-------------|

| | |
|--------------------|------------------------------|
| 236-10850-7 | with motor starter 0,4–0,6 A |
| 236-10850-8 | with motor starter 0,6–1,0 A |
| 236-10850-9 | with motor starter 1,0–1,6 A |
| 236-10980-6 | with motor starter 2,4–4,0 A |

EOT-2 controller

| Order number | Description |
|--------------|-------------|
|--------------|-------------|

| | |
|--------------------|-------------------------------------|
| 664-34135-7 | EOT-2 controller, for one pump only |
|--------------------|-------------------------------------|

Control units

IG 502-2E +...



Description

The IG 502-2-E ... is a universal control and monitoring device for vehicles and is suitable for centralized lubrication in progressive and single-line systems. The compact device is equipped with a display panel for parameter settings and function monitoring. Different operating modes, such as timer, counter and monitoring functions for pressure and cycle switches, are programmable. The device has its own data memory to be independent of supply voltage. To avoid environmental influences, it is advisable to install the device inside a cabinet.

Feature and benefits

- Universal control and monitoring device
- Compact design
- Easy to operate
- Different operating modes, such as timer, counter and monitoring functions
- Red LED failure indicator also shows failure cause
- Integrated counters for permanent operation, failed hours and working-hour meter show system life cycle
- PIN lockout feature to prevent unauthorized programming changes

Applications


- Commercial vehicles
- Construction machines
- Farm machinery

Technical data

| | |
|---------------------------------|---|
| Function principle | control and monitoring device |
| Operating temperature | -25 to +75 °C, -13 to +167 °F |
| Storage temperature | -10 to +70 °C, -14 to +158 °F |
| Control voltage max. | 12 or 24 V DC |
| Contact load connector M | 5 A at 12 or 24 V DC |
| SL-output | 4 W |
| Fuse protection | max. 5 A |
| Pause time | adjustable, 0,1 h to 99,9 h |
| Pump running time | adjustable, 0,1 min to 99,9 min |
| Pulse time | adjustable, 1 to 999 |
| Operation hours storage | 0 to 99999,9 h |
| Operation- failed hours storage | 0 to 99999,9 h |
| Protection class | IP 20 DIN 40050, plug IP 00 |
| Dimensions | 138 × 65 × 40 mm 5.43 × 2.56 × 1.57 in |

IG 502-2-E ...

| Order number | Description |
|----------------|--------------------|
| IG 502-2-E+912 | Controller 12 V DC |
| IG 502-2-E+924 | Controller 24 V DC |
| 997-000-185 | Wire set |



NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on

SKF.com/lubrication:

1-1700-2-EN, 951-180-002-EN

Control unit

LC 502



Description

The compact LC 502 is an all-purpose controller suitable for single-line, progressive and dual-line systems. Supplied as a separate unit or already integrated in the pump, this versatile controller includes a basic power switch, motor circuit breaker (230/400 V AC types) start button and fault indicator light. The unit's user-friendly display enables input of customer-specific settings in up to seven languages (optional). Integration of the LC 502, configuration of technical ratings and characteristics depend on the customer's specific application.

Feature and benefits

- Easy-to-operate, programmable controller
- System monitoring and error detection/failure remedy
- Integrated temperature-overload safety device
- Up to three lubrication circuits can be controlled or monitored separately

Applications

- General industry
- Cement and steel plants
- Food and beverage industry
- Machine tools

Technical data

| | |
|---------------------------------|--|
| Function principle | control and monitoring device |
| Operating temperature | 0 to +60 °C; +32 to 140 °F |
| Operating voltage | |
| 24 V DC | 0,16–0,25 kW |
| 230 V AC | 0,15–0,85 kW |
| 400 V AC, 3-phase | 0,15–0,85 kW |
| Operating voltage frequency | 50 to 60 Hz |
| Electrical input connectors | 4 |
| Electrical output connectors | 4 |
| Input voltage | 12 or 24 V DC |
| Off time | cycle : 8 h |
| On time | pumping: 1 h |
| Fuse F1: 400/230 V AC | 5 × 20 mm 4 A |
| Fuse F2: 400/230 V AC, 24 V DC | 5 × 20 mm 2 A |
| Cycle setting | depend on: time, machine pulse, pump revolutions |
| Possible low-level controls: W1 | wipe /dynamic |
| Possible low-level controls: W2 | wipe /capacitive/ static analog |
| Lubrication circuits | max. 2 |
| Rotation | 10 corresponds to 10 agitator rotations |
| Protection class | IP 54 |
| Dimensions | 400 × 400 × 600 mm 15.75 × 15.75 × 23.62 in |
| Mounting position | upright, cable terminals pointing downwards |



NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:

1-0361-EN, 951-170-215 EN, 951-180-005 EN

Control unit

LC 502

LG 502

| Order number | Designation |
|---------------------|---|
| 24-1074-2200 | 400 V AC; 0,55 kW; also for dual-line systems |
| 24-1074-2210 | 400 V AC; 0,55 kW; also for single-line systems |
| 24-1074-2220 | 400 V AC; 0,55 kW |
| 24-1074-2260 | 24 V DC; 0,55 kW; also for dual-line systems |
| 24-1074-2270 | 24 V DC; 0,55 kW; also for single-line systems |
| 24-1074-2280 | 24 V DC; 0,55 kW |

Control unit

IGZ / EXZT



Description

IGZ 51 and EXZT universal electronic control and monitoring devices are used in multi-line and progressive lubrication systems and are available in two voltage versions. Developed for stationary industrial applications, these devices may be installed in a switching cabinet or internally in a compact lubrication unit. They can be used as time-dependent or pulse-dependent controllers to initiate a lubrication cycle.

The EXZT devices control the pump running time and monitors simultaneously the strokes of the pulse generator or sensor of the metering device. All devices have custom-built functions integrated and can be set to meet system requirements.

Feature and benefits

- Combined universal control and monitoring device
- Easy installation by top hat rail mounting
- Adjustable operating modes
- Time operation or load-dependent machine-stroke operation
- Low-level control and EPROM included

Applications

- Stationary industrial applications
- Installation in switching cabinet of stationary general industry machines

Technical data

| | |
|-----------------------|--------------------------------------|
| Function principle | control and monitoring device |
| Operating temperature | 0 to +60 °C, +32 to 140 °F |
| Output voltage | 24 V DC +10%/-15% |
| Connector for class | II |
| Protection class | IP 30, clamps IP 20 |
| Dimensions | 70 × 75 × 110 mm 2.7 × 3 × 4.3 in |

Version + 471

| | |
|-----------------------|--------------------------------|
| Input voltage | 100 – 120 V AC; 200 – 240 V AC |
| Input current rated | 70 mA / 35 mA |
| Power input | 8 W |
| Frequency | 50 – 60 Hz |
| Fuse | max. 6.3 A |
| Switching current | max. 5 A |
| Input voltage sensors | 24 V DC |

Version + 472

| | |
|-----------------------|---------------------------------|
| Input voltage | 20 – 24 V DC; 20 – 24 V AC |
| Input current rated | 75 mA at max. fan-out of 250 mA |
| Power input | 5 W |
| Frequency | DC or 50 – 60 Hz |
| Fuse | max. 6.3 A |
| Switching current | max. 5 A |
| Input voltage sensors | 24 V DC |
| Mounting position | any |

NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publication available on SKF.com/lubrication:

1-1700-1 EN, 1-1700-2 EN, 951-180-001 EN

Control unit

IGZ / EXZT

EXZT... and IGZ 51-... ¹⁾

| Order number | V DC | V AC; 50-60 Hz | pump delay time adjustable | pulse monitoring (interval time) | prelubrication | power failure memory |
|--------------------|-------|------------------|----------------------------|----------------------------------|----------------|----------------------|
| EXZT2A03-E+471 | – | 100-120; 200-240 | • | – | – | – |
| EXZT2A03-E+472 | 20-24 | – | • | – | – | – |
| EXZT2A06-E+471 | – | 100-120; 200-240 | • | • | – | – |
| EXZT2A06-E+472 | 20-24 | – | • | • | – | – |
| IGZ 51-20-E+471 | – | 100-120; 200-240 | – | – | – | – |
| IGZ 51-20-E+472 | 20-24 | – | – | – | – | – |
| IGZ 51-20-S2-E+471 | – | 100-120; 200-240 | – | – | – | • |
| IGZ 51-20-S2-E+472 | 20-24 | – | – | – | – | • |
| IGZ 51-20-S7-E+471 | – | 100-120; 200-240 | – | – | – | • |
| IGZ 51-20-S7-E+472 | 20-24 | – | – | – | – | • |
| IGZ 51-20-S8-E+471 | – | 100-120; 200-240 | – | – | • | • |
| IGZ 51-20-S8-E+472 | 20-24 | – | – | – | • | • |

¹⁾ All models are with lubricant level monitoring, pulse generator; pump runtime limitation, adjustable interval and monitoring time

Control units

ST-102



Description

The ST-102 controller is designed for the control and monitoring of lubrication systems in vehicles with a 12 or 24 V DC power supply. It is a one-channel lubrication control center for systems with air-operated or electrical pumps. The ST-102 is suitable for environments with temperatures ranging from -40 to $+80$ °C (-40 to $+176$ °F) and features an IP 40 protection class. All lubrication configurations can be set in the field by the user.

Feature and benefits

- Available for 12 or 24 V DC
- Suitable for operational environments in extreme temperatures
- One-button user interface

Applications

- Vehicles
- Construction machinery
- Agricultural machinery
- Dual-line, progressive and single-line lubrication systems

Technical data

| | |
|-----------------------|--|
| Function principle | control and monitoring device |
| Operating temperature | -40 to $+80$ °C; -40 to $+176$ °F |
| Power supply | 12 and 24 V DC |
| Input | 4 digital |
| Output | 4 digital |
| Interface | none |
| Protection class | IP 40 |
| Dimensions | 26 × 60 × 160 mm 1.02 × 2.36 × 6.3 in |

ST-102

| Order number | Description |
|-----------------|---|
| 11500607 | V1 for progressive and single-line systems |
| 11500610 | V2 for progressive, dual- and single-line systems |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

6408 EN, 13615 EN

Control units

ST-1240-GRAPH-4



Description

The ST-1240-GRAPH-4 is a four-channel lubrication control centre that supports any combination of single-line, dual-line and progressive lubrication systems. The lubrication channels can be zones, separated by shut-off valves, or complete lubrication systems with separate pumping centres and varying lubricants. The ST-1240 control centre enables configuration in the field via an alphanumeric touchscreen display.

Feature and benefits

- Automatic pump change (Dualset)
- Grease spraying control with air monitoring
- IP 65 protection rating
- Compatible with SKF Doser monitor
- Works with SKF Online 1440 control software

Applications

- Stationary machines
- General industry
- Steel industry

Technical data

| | |
|------------------------------------|--|
| Function principle | control and monitoring device |
| Operating temperature | 0 to +50 °C; +32 to 122 °F |
| Lubricant | oil and grease |
| lubrication circuits | 4 |
| Operating voltage | 93 to 132 V AC, 186 to 264 V AC; |
| Operating voltage frequency | (± 10%) |
| Operating current | 47 to 63 Hz |
| Control voltage | 5,4 A/115 V AC, 2,2 A/230 V AC |
| Overload protection | 24 V DC, ± 10% |
| Cable connection | automatic fuse, 6 A |
| Interface | screw connections for 25 mm ² wires alphanumeric touchscreen display RS-422 Modbus port |
| Protection class | IP 65 |
| Dimensions without cable glands | 380 × 300 × 210 mm 14.9 × 11.8 × 8.3 in |

ST-1240-GRAPH

| Order number | Description |
|---------------|--------------------------------|
| VEEV 12380210 | ST-1240 GRAPH-4 control centre |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

12404 EN, 13615 EN

Control units

ST-2240-LUB



Description

ST-2240-LUB-6 and ST-2240-LUB-14 lubrication control centers are suitable for use in dual-line lubrication systems, as well as single-line and progressive systems. These units have a touchscreen display and are only differentiated by the cabinet size and maximum number of lubrication channels served. The ST-2240-LUB-6 controls up to 6 separate lubrication channels, while ST-2240-LUB-14 controls up to 14 channels, each having independent lubrication parameters and/allows use of different lubricants if required. The lubrication system is adjustable at field site by adding or reducing channel modules, and configuration can be changed in the field by the user. Pressure switches and transmitters or piston detectors can be used in all channels. Also the new lubricant low level ultrasonic sensor is supported.

Features and benefits

- Versatile and durable, automatic pump change (Dualset)
- Modular units provide easy system modification
- Compatible with ultrasonic low level sensor
- Grease spraying control with air monitoring
- Compatible with SKF Doser monitor

Applications

- Cement and steel industry
- Mining – stationary and mobile excavators
- Automotive industry
- Food and beverage

Technical data

| | |
|------------------------------|--|
| Function principle | control and monitoring device |
| Operating temperature | 0 to +50 °C, +32 to +122 °F |
| Lubricant channels | 1-14 |
| Supply voltage | 115/230 VAC, automatic range selection |
| Supply voltage frequency | 47 to 63 Hz |
| Control voltage | 24 V DC, ± 10 % |
| Overload protection | automatic fuse, 6 A |
| Cable connection | screw terminals for 2,5 mm ² wires |
| Protection class | IP 65 |
| Interface | 5.7" TFT touch screen , 320 × 240, 64k colors, ethernet and USB port mobile app for monitoring |
| Data logging | Log files on USB memory |
| Fieldbus | ModbusTCP slave, other protocols on request |
| Alarm Outputs | relays K1 & K2: potential-free change over contact; maximum load 230 V/1A; channel modules: potential-free contact; maximum load 50 V DC/1A |
| EMC | EN61000-6-4, EN61000-6-2 |
| Safety of Machinery Standard | EN 60204-1 |
| Dimensions | 600 × 600 × 250 mm 23.6 × 23.6 × 9.8 in |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

PUB LS/P2 17950 EN

Controll units

ST-2240-LUB

| SKF ST-2240-LUB | | |
|-----------------|-------------------------------|----------------------|
| Order number | Designation | Lubrication channels |
| 12380760 | ST-2240-LUB-6 control center | 1-6 |
| 12380765 | ST-2240-LUB-14 control center | 1-14 |
| 12501270 | CM channel module | |

Controll units

LRM 2



Description

SKF's LRM2 lubrication remote monitor is designed for use with lubrication systems that cannot be checked daily due to the nature or position of the specific application. Compatible with oil or grease, the monitor can be used on single-line, dual-line and progressive lubrication systems. The LRM2 can communicate with a pump or group of pumps on the same type of lubrication system. LRM utilizes a SIM card similar to those found in cell phones and tablets to send and receive text messages via iOS or android mobile devices or via e-mail to a computer. The monitoring system can transmit alert messages to a random number of e-mail or mobile phone contacts. These contacts can be grouped based on the message type. The LRM2 features two digital inputs and outputs and sends both low-level and fault messages. Also, the monitor can be used to start an additional lubrication cycle and can be reset by sending messages from the mobile device. In addition, you can access system information by using your web browser without having to install special software. The LRM is suitable for wind energy, railroad wayside, cable car and wastewater treatment applications, as well as other industries.

Features and benefits

- Two digital inputs and outputs
- Antenna is packed inside housing; optional external antenna can be ordered
- LRM2 module is available without housing for mounting in existing control box

Applications

- Wind energy generators
- Wastewater treatment applications

Technical data

| | |
|-------------------------------|---|
| Function principle | control and monitoring device with remote control |
| Operating temperature | -30 to +70 °C; -22 to +158 °F |
| Storage temperature | -40 to +70 °C; -40 to +158 °F |
| Air humidity | 0–95% |
| Protection class | IP 66 |
| Screwed cable gland | M16 |
| Clamping zone of cable strand | Ø4–10 mm; 0,16–0,39 in |
| LRM2 clamping zone | 0,25–2,5 mm; 0,0098–0,098 in |
| Power supply | 12–24 V DC (± 20%) |
| Power consumption | max. 3 W |
| Min. installation space | 420 × 220 × 350 mm |
| Dimensions | |
| LRM 2 without enclosure | 150 × 90 × 61 mm; 10.67 × 6.73 × 10.31 in |
| Enclosure | 271 × 171 × 262 mm 16.53 × 8.66 × 13.78 in |
| Mounting position | any |




NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication.

PUB LS/P2 17887 EN; 951-181-022-EN

Control units

LRM 2

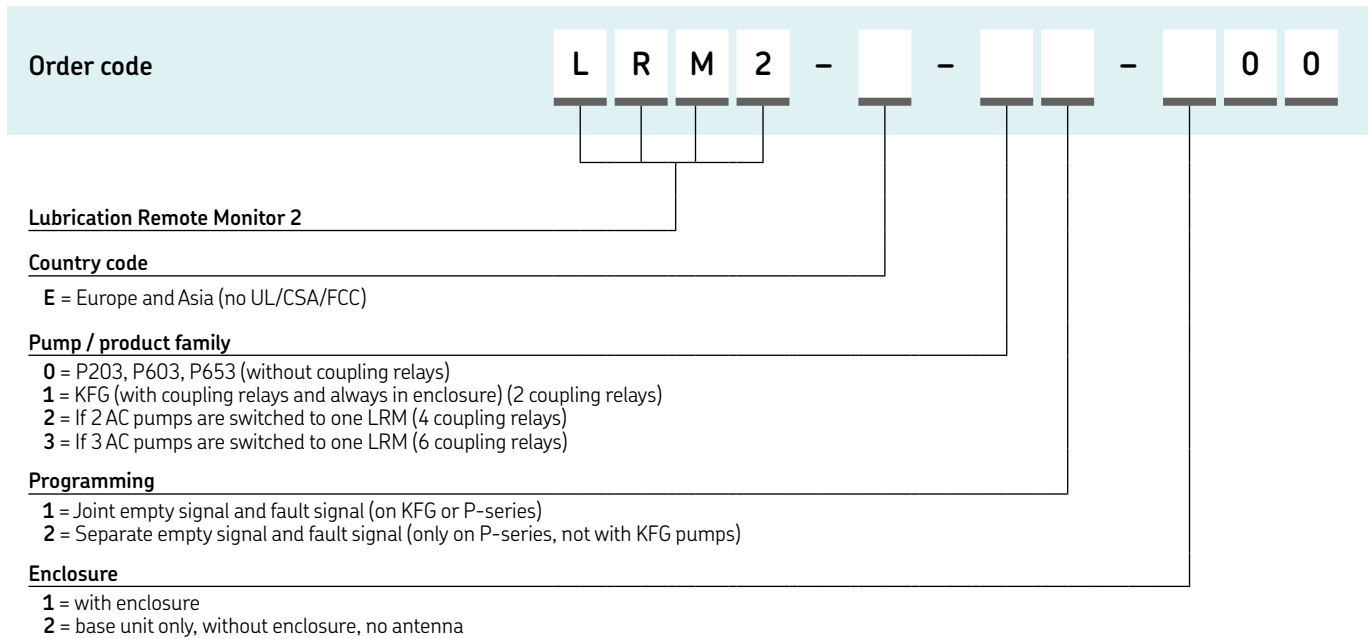

| Order example | | Antenna | |
|---------------|---|--------------|--|
| Order number | Designation | Order number | Designation |
| LRM2-E-00-100 | <ul style="list-style-type: none"> Lubrication Remote Monitor 2 For use in Europe and Asia Pump versions P203, P603, P653 Low-level and fault signal separately With enclosure | 236-11335-8 | 2G/3G Magnetic base antenna (3 m length) |



Overview of monitoring devices

| Control units | | | | | | | |
|---------------------------------------|--|---|----------|----------|-----------------------|-------------|------|
| Product | Function type | Designation | Voltage | | Operating temperature | | Page |
| | | | V DC | V AC | °C | °F | |
| HCC | Monitoring device for hose connections | Additional control and monitoring system for progressive systems to identify failures in hose connections | 12, 24 | – | -50 to +70 | -58 to +158 | 130 |
| Smart Plug lubrication control | Multifunctional monitoring device | Direct adaption between sensor and connecting cable. Configurable by PC via IR interface converter | 10 to 30 | – | 0 to +60 | +32 to 140 | 132 |
| Universal piston detector | Piston detector | Allround magnetic sensor for all SKF metering devices in progressive systems | 10 to 30 | – | -40 to +85 | -40 to +185 | 133 |
| SP/SFE30 | Pulse monitor | To monitor oil and grease volumetric flow rates | 0 to 30 | – | +15 to 70 | +5 to 158 | 134 |
| EWT2A | Pulse monitor | Monitors up to 3 pulse generators | 24 | 115, 230 | 0 to +60 | +32 to 140 | 135 |
| 234-11145-3/4/5/9 | Digital pressure switch | Pressure switch for extensive lubrication point monitoring | 18–36 | – | -25 to 125 | -13 to 257 | 136 |
| 234-10825-8 | Digital pressure switch | Pressure switch for simple lubrication point monitoring | 30–250 | 125, 250 | -25 to +85 | -13 to 185 | 137 |

Monitoring devices

HCC



Description

The hose connection control (HCC) is intended to monitor electrically conductive, high-pressure lubrication hoses for line breakage. If there is a fault in the main line or feed lines, the unit alerts the machine operator immediately. Operation of the HCC is not affected by line lengths, ambient temperature, pressure differential or pressure losses. Utilizing non-conductive lubricants or hydraulic fluids, this monitoring system has an operating pressure of up to 300 bar (4 350 psi) and can be used in temperatures ranging from -40 to $+70$ °C (-40 to $+158$ °F).

Feature and benefits

- Immediately detects hose ruptures
- Expandable at any time
- Easy retrofit in existing lubrication systems
- Monitors difficult-to-access hoses to lubrication points
- Common LED signal of all connected hoses on the display

Applications

- Construction and mining machines; cranes
- Wood-handling machines
- Forklifts, reach stackers and machines with movable units or accessories
- Agriculture

Technical data

| | |
|---------------------------------------|--|
| Function principle | monitoring device for hose connections |
| Operating temperature | Isolator: -50 to $+70$ °C; -58 to $+158$ °F Controller: -25 to $+70$ °C; -13 to $+158$ °F Controller storage: -40 to $+70$ °C; -40 to $+158$ °F |
| Power supply | 12/24 V DC |
| Monitored hose per monitoring unit | max. 15 pieces at 12 V DC |
| Positive ok signal | max. 24 pieces at 24 V DC |
| Signal cable to one cut-off connector | 12/24 V PNP |
| Signal cable at cut-off | 20 m; 65 ft |
| Protection class | approx. 150 mm; 5.90 in |
| Dimensions | IP 65 100 × 85 × 40 mm 3.93 × 3.34 × 1.57 in |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

13615 EN

Monitoring devices

HCC



HCC Hose connection control

| Order number | Designation |
|--------------|---|
| 236-10986-1 | HCC, evaluation unit |
| 236-10153-3 | HCC, with cable 20 m |
| 532-34839-2 | HCC, endlink HCC DN 8-10L-E |
| 532-37731-1 | basic kit consisting of above three parts |
| 532-34839-6 | HCC, endlink HCC DN 4-6L-E |
| 532-34839-3 | HCC, interlink HCC DN 8-10L-I |
| 532-34839-5 | HCC, interlink HCC DN 4-6L-I |

Accessories

HCC Hose

| Order number | Designation |
|--------------|--|
| 111-35409-1 | hose TBF 204 CU DN4, sold by the meter |
| 226-11169-1 | hose stud D6/NW4 C straight |

Monitoring devices

SmartPlug lubrication control



Description

The SmartPlug lubrication control is a simple, multifunction switching device that can be used as a timer or pulse counter when no standard timer is available. Operation with on-delay or signal-inverter functions also is possible. Suitable for retrofitting, the SmartPlug can be installed easily in an existing electrical system. Its complimentary programming timer can be adapted directly between a sensor and the connecting cable.

Feature and benefits

- Simple, cost-effective, multifunction switching device
- Acts as timer or pulse counter
- Easy installation in electrical systems
- Suitable for retrofitting in existing systems
- Free programming timer

Applications

- Progressive systems where additional monitoring of separate lubrication circuits is required
- Counter for chain lubrication systems
- Forklifts
- Chain lubrication

Technical data

| | |
|----------------------------|------------------------------------|
| Function principle | multifunctional monitoring device |
| Operating temperature | 0 to +60 °C; +32 to 140 °F |
| Operating voltage UB | 10 – 30 V DC |
| Residual ripple within UB | max. 10% |
| Power consumption | < 10 mA, no load |
| Current consumption own | < 10 mA |
| Input resistance | >10 kOhm |
| Input frequency | max. 10 kHz, at ppp 1:1 |
| Switching input | PNP/NPN adjustable |
| Output current | max. 400 mA |
| Drop-out delay | |
| Teachable time | min. 1 ms; max. 65 535 ms |
| Counter | |
| Counting time | min. 1 pulse; max. 65 535 pulses |
| Periodic monitoring | |
| Teachable time | min. 10 sec; max. 655 350 sec |
| Short-circuit protection | yes |
| Standard | CE |
| Protection class | IP 67 |
| Dimensions | Ø 20, l=60 mm Ø 0.79, l=2.36 in |

SmartPlug lubrication control

| Order number | Description |
|--------------|--|
| 234-10151-8 | Smart Plug MFU 12 P4-X01 output PNP |
| 234-10151-9 | IR Interface converter for configuration by PC |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication.

Universal piston detector



Description

The universal and bipolar piston detectors are position sensors that are screwed into the metering device together with the relevant pressure-resistant adapter. The sensors detect the piston by means of the closed adapter without coming into direct contact with it. They adjust themselves independently after several distribution strokes. The universal piston detector automatically detects the customer's plug or cable assignment, 2-wire or 3-wire version (with cable break protection). The bipolar piston detector is only available in a 2-wire version. The signal voltage can be applied to either pin 1 or pin 4, which means this sensor can be used for mobile applications such as vehicles or agricultural and construction machinery.

Feature and benefits

- Timer setting on external controller detects operational function signal
- Counter setting is used as cycle switch with an external controller

Technical data

| | |
|----------------------------|--|
| Function principle | piston detector |
| Operating temperature | -40 to +85 °C; -40 to +185 °F |
| Electrical connection | 3 wire DC PNP; 2 wire PNP/NPN |
| Operating voltage | 10 to 36 V DC |
| Current draw | 5 mA, only in 3 contact operation |
| Connector for class | III |
| Reverse voltage protection | yes |
| Current rating | 100 mA |
| Overload proofed | yes |
| Switching frequency | 10 Hz |
| Standard | CE, UL, CSA, E1 |
| Protection class | IP65; IP68; IP69 K |
| Dimensions without socket | ∅ 12 mm, l = 52 mm, ∅ 0.47 in; l = 2.052 in |

Universal piston detector

| Order number | Description |
|--------------------|---------------------------|
| 234-13163-9 | Universal piston detector |
| 234-11454-1 | Bipolar piston detector |
| 237-13442-4 | Cable with M12x1 socket |

Kits with piston detector, O-ring and adapter for lubricant metering devices

| Order number | Suitable for metering device | Type |
|---------------------|----------------------------------|-----------|
| 24-0159-6025 | VP / PSG2 | Universal |
| 24-0159-6021 | VP | Bipolar |
| 24-0159-6024 | VPK / PSG1 | Universal |
| 24-0159-6022 | VPK | Bipolar |
| 24-0159-6023 | VPB | Universal |
| 24-0159-6028 | VPB | Bipolar |
| 24-0159-6026 | PSG3 | Universal |
| 519-85224-1 | SSV / SSVL / SSVL / SSVL / VS... | Universal |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:
17645 EN; 951-150-032

Monitoring devices

SP/SFE30



Description

SP/SFE30 pulse generators are designed to monitor oil and grease volumetric flow rates. The switching pulses are generated at a rate proportional to the volumetric flow, and the pulses from the pulse generator are evaluated by a downstream control unit. SP/SFE30/6GL pulse generators have been approved by German Lloyd for use on ships.

Feature and benefits

- For oil and grease NLGI 1
- Operating pressure of up to 600 bar (8 700 psi)
- Germanischer Lloyd-approved device available

Applications

- Progressive lubrication systems
- General stationary industry machines
- Ships
- Wind energy systems
- Glass industry

Technical data

| | |
|-------------------------------|---|
| Order number | |
| SP/SFE/ 30/5 | 24-2583-2516 |
| SP/SFE 30/6 GL with cable set | 24-2583-2517 |
| SP/SFE 30/3003Atex | 24-2583-2526 |
| Function principle | pulse monitor |
| Operating temperature | -15 a +70 °C; +5 a +158 °F |
| Operating pressure | 4 to 600 bar; 58 to 8 700 psi |
| Lubricant | oil: viscosity minimum 12 mm ² /s; grease: NLGI 1 |
| Volumetric flow range | 0,1 to 50 cm ³ /min 0.006 in ³ to 3.051 in ³ /min |
| Volume/pulse | 0,34 cm ³ ; 0.021 in ³ |
| Contact type | reed contact |
| Connection | SP/SFE 30/5: plug DIN43650 SP/SFE 30/6 GL: cable |
| Switching voltage | 0 to 30V DC |
| Switching capacity | 10 W with V AC/V DC |
| Protection class | IP 65 |
| Dimensions | 65 × 170 × 35 mm 2.56 × 6.69 × 1.37 in |

SP/SFE30 Accessories

| Order number | Description | Tube |
|--------------|--------------------------|--------|
| 406-411 | straight connector G 1/4 | ∅ 6 mm |
| 96-1108-0058 | straight connector G 1/4 | ∅ 8 mm |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication:

1-3009-EN, 1-3018-EN, 951-230-012 EN

Monitoring devices

EWT2A



Product description

The EWT2A series of universal pulse monitoring devices can be used in all standard SKF lubrication systems. The pulse, generated from a progressive metering valve sensor, a pulse generator or a rotary gear sensor, must be received within a pre-selected and defined value. Depending on the selected version, a minimum and a maximum value can be monitored simultaneously for two or three pulse inputs. The EWT2A pulse monitoring devices are available in two voltage versions and may be installed in a switching cabinet. All devices have custom-built functions integrated and can be set to meet system requirements.

Features and benefits

- Easy installation by top hat rail mounting
- Adjustable operating modes
- Monitoring time 6-90 seconds
- Settings possible from 0,01 to 2 500 pulses/minute

Applications

- In connection with a pulse generator for oil and grease to reliably monitor lubricant flow

Technical data

| | |
|-----------------------|--|
| Function principle | universal electronic control and monitoring device |
| Operating temperature | 0 to +60 °C +32 to 140 °F |
| Output voltage | 24 V DC +10% /-15% |
| Dimensions | 70 x 75 x 110 mm 2.7 x 3 x 4.3 in |

Version + 471

| | |
|------------------------|----------------------------|
| Input voltage | 100-120 V AC; 200-240 V AC |
| Input current rated | 70 mA/35 mA |
| Power input | 8 W |
| Frequency | 50 - 60 Hz |
| Fuse | max. 6.3 A |
| Switching current | max. 5 A |
| Output voltage sensors | 24 V DC |

Version + 472

| | |
|------------------------|---------------------------------|
| Input voltage | 20 to 24 V DC; 20 to 24 V AC |
| Input current rated | 75 mA at max. fan-out of 250 mA |
| Power input | 5 W |
| Frequency | DC or 50 - 60 Hz |
| Fuse | max. 6.3 A |
| Switching current | max. 5 A |
| Output voltage sensors | 24 V DC |

EWT2A... pulse monitor

| Order number | Description |
|------------------|--|
| EWT2A01-S1-E+471 | for up to 3 pulse generators, 115/230 V AC |
| EWT2A01-S1-E+472 | for up to 3 pulse generators, 24 V DC |
| EWT2A04-S1-E+471 | for up to 2 pulse generators, 115/230 V AC |
| EWT2A04-S1-E+472 | for up to 2 pulse generators, 115/230 V AC |



NOTE

For further technical information, technical drawings, accessories, spare parts or product function descriptions, see the following publications available on SKF.com/lubrication:

1-1700-5 EN, 951-180-001 EN

Monitoring devices

234-11145-3/4/5/9



Description

These virtually maintenance-free electronic pressure sensors are suitable for pressure measurements for gases and fluids. They are user friendly and can be applied easily in standard or superior applications. The space-saving housing is pivotable up to 320° for optimal readability of the 4-digit, digital display. One or two switching outputs and an analog output signal for switching point and hysteresis. Both can be adjusted via push buttons. Different value units such as bar, mbar, psi or MPa can be selected.

Features and benefits

- Simple monitoring of lubrication points
- Menu-guided adjustments via 2 push buttons
- Pre-adjustable hysteresis
- Programmable parameters, password protected
- Reverse polarity protection of the supply voltage, excess voltage, override and short circuit protection are provided
- Compact housing with 320° pivot
- For standard and superior applications

Applications

- Marine, off-shore applications
- Wind, vehicle, steel and heavy industries

Technical data

| | |
|---------------------------------|---|
| Function principle Lubricant | Digital pressure switch oil and fluid grease NLGI 000–00, grease NLGI 1, 2 |
| Operating temperature | –25 to +125 °C; –13 to +257 °F |
| Operating pressure | max. 600 bar; max. 8 700 psi 234-11145-5: max. 400 bar; max. 5 800 psi |
| Operating voltage | 18–36 VDC |
| Operating current | max. 500 mA |
| Current draw | ≤ 50 mA |
| Output signal | 1 or 2 × PNP; 1 analog, digital, NO or NC adjustable |
| Switching frequency | max. 200 Hz |
| Switching point adjusted | 234-11145-5: 175 bar; 2 465 psi |
| Material: | |
| Housing | PA6.6, stainless steel, FKM |
| Measuring cell | ceramics Al2O3 |
| Adapter | stainless steel |
| Electrical connection | M12 × 1; 4 pin plug |
| Pressure port | G 1/4 or G 3/8; DIN3852 |
| Protection class | IP 67; EC 60529 |
| Dimensions | min. 34 × 94 × 49 mm max. 34 × 134,5 × 49 mm min. 1.34 × 3.7 × 1.9 in max. 1.34 × 5.3 × 1.9 in |
| Mounting position | any |

Order number

| Order number | Designation |
|--------------------|--|
| 234-11145-3 | 1 × PNP, 4–20 MA, with adapter G 1/4 and connector |
| 234-11145-4 | 1 × PNP, 4–20 MA, basic model |
| 234-11145-5 | 2 × PNP, 0–20 MA, with adapter G 1/4 and connector, front flushed |
| 234-11145-9 | 1 × PNP, 4–20 MA, with adapter G 3/8 and connector |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication.

Monitoring devices

234-10825-8



Description

This pressure switch reliably monitors pressure in lubrication systems at a pre-adjusted pressure value. When adjusted value is reached, pressure switch opens or closes an electric circuit via a defined piston stroke (depending on pressure power and pre-load spring). A micro switch can be used for DC or AC voltage. The switch's housing can be pivoted up to 360°. The pre-adjusted switching point pressure value is set at the factory.

Features and benefits

- Simple, mechanically operated pressure switch for monitoring of lubrication points
- Designed as a change-over pressure switch
- Monitors a pre-adjusted pressure value
- Suitable for DC and AC voltage
- Pivotal housing up to 360°
- Maintenance free

Applications

- Machine tools
- Construction machinery
- Wind energy
- Vehicle
- Steel and heavy industries

Technical data

| | |
|-----------------------|--|
| Order number | 234-10825-8 |
| Function principle | rotatable pressure switch |
| Lubricant | oil and fluid grease NLGI 000, 00 |
| Operating temperature | -25 to +85 °C -13 to +185 °F |
| Operating pressure | max. 400 bar max. 5 800 psi |
| Switching pressure | 100 to 400 bar 1 450 to 5 800 psi |
| Adjustability | under pressure |
| Operating voltage | adjustable: 30 to 250 VDC; 125; 250 VAC |
| Load resistance | 0,25-5 A |
| Load inductive | 0,25-5 A |
| Switch type | micro switch with spring-loaded piston |
| Contact type | change-over |
| Contact electrical | plug connector DIN72585 ø 2,5 mm |
| Material: | |
| Housing | zinc-coated steel, UR |
| Contact electrical | electroplated silver gilt |
| Protection class | IP 67, IP 6K9K |
| Dimensions | 30 × 74 mm; 1.18 × 2.91 in |
| Mounting position | any, but preferably vertical |



NOTE

Further technical information, technical drawings, accessories, spare parts or product function descriptions available on SKF.com/lubrication.

Index

| | | | | | |
|--------------|-----|-------------|-----|----------------|-----|
| 24-0159-6021 | 133 | 223-13052-2 | 75 | 303-16122-1 | 83 |
| 24-0159-6022 | 133 | 223-13052-3 | 75 | 303-16122-1 | 85 |
| 24-0159-6023 | 133 | 226-10328-5 | 83 | 303-16123-1 | 83 |
| 24-0159-6024 | 133 | 226-11169-1 | 131 | 303-16123-1 | 85 |
| 24-0159-6025 | 133 | 226-14091-4 | 91 | 303-16124-1 | 83 |
| 24-0159-6026 | 133 | 226-14091-5 | 81 | 303-16124-1 | 85 |
| 24-0159-6028 | 133 | 234-10151-8 | 132 | 303-16125-1 | 83 |
| 24-1074-2200 | 119 | 234-10151-9 | 132 | 303-16125-1 | 85 |
| 24-1074-2210 | 119 | 234-10825-8 | 129 | 303-16126-1 | 83 |
| 24-1074-2220 | 119 | 234-10825-8 | 137 | 303-16126-1 | 85 |
| 24-1074-2260 | 119 | 234-11145-3 | 136 | 303-16127-1 | 83 |
| 24-1074-2270 | 119 | 234-11145-4 | 136 | 303-16127-1 | 85 |
| 24-1074-2280 | 119 | 234-11145-5 | 136 | 303-16284-1 | 81 |
| 24-2151-3734 | 102 | 234-11145-9 | 136 | 303-17499-3 | 53 |
| 24-2151-3736 | 102 | 234-11454-1 | 133 | 303-17499-3 | 69 |
| 24-2151-3760 | 98 | 234-13163-9 | 133 | 303-17499-3 | 71 |
| 24-2151-3760 | 100 | 236-10153-3 | 131 | 303-17499-3 | 83 |
| 24-2151-3762 | 98 | 236-10567-5 | 113 | 303-17499-3 | 91 |
| 24-2151-3762 | 100 | 236-10567-6 | 113 | 303-19285-1 | 13 |
| 24-2151-3764 | 98 | 236-10850-7 | 115 | 303-19346-2 | 83 |
| 24-2151-3764 | 100 | 236-10850-7 | 116 | 303-19346-2 | 91 |
| 24-2583-2516 | 134 | 236-10850-8 | 115 | 304-17571-1 | 13 |
| 24-2583-2517 | 134 | 236-10850-8 | 116 | 304-17574-1 | 13 |
| 24-2583-2526 | 134 | 236-10850-9 | 115 | 404-403 | 89 |
| 24-9909-0244 | 55 | 236-10850-9 | 116 | 406-403 | 89 |
| 24-9909-0244 | 65 | 236-10980-6 | 115 | 406-403W | 89 |
| 24-9909-0244 | 77 | 236-10980-6 | 116 | 406-403W | 89 |
| 44-2578-6110 | 87 | 236-10986-1 | 131 | 406-411 | 134 |
| 44-2578-6201 | 87 | 236-11066-1 | 115 | 406-423 | 89 |
| 44-2578-6321 | 87 | 236-11335-8 | 127 | 408-423W | 89 |
| 44-2578-6323 | 87 | 237-13442-4 | 133 | 408-423W | 89 |
| 44-2578-6350 | 87 | 244-14164-1 | 71 | 410-443 | 89 |
| 44-2578-6360 | 87 | 303-16118-1 | 83 | 410-443W | 89 |
| 96-1108-0058 | 134 | 303-16118-1 | 85 | 410-443W | 89 |
| 111-35409-1 | 131 | 303-16119-1 | 83 | 441-008-511 | 89 |
| 169-000-146 | 73 | 303-16119-1 | 85 | 441-008-511 | 89 |
| 179-990-486 | 115 | 303-16120-1 | 83 | 451-006-518-VS | 89 |
| 219-13798-3 | 83 | 303-16120-1 | 85 | 451-006-518WVS | 89 |
| 219-13798-3 | 91 | 303-16121-1 | 83 | 466-419-001 | 89 |
| 223-13052-1 | 75 | 303-16121-1 | 85 | 466-419-001 | 98 |

Index

| | | | | | |
|-------------------|-----|------------------|----|------------------|----|
| 466-419-001..... | 100 | 549-34254-7..... | 83 | 619-26650-1..... | 81 |
| 466-431-001..... | 89 | 549-34254-7..... | 85 | 619-26651-3..... | 81 |
| 504-30344-4..... | 53 | 549-34254-8..... | 83 | 619-26653-1..... | 81 |
| 504-30344-4..... | 69 | 549-34254-8..... | 85 | 619-26654-3..... | 81 |
| 504-30344-4..... | 71 | 549-34254-9..... | 83 | 619-26761-1..... | 81 |
| 504-30344-4..... | 83 | 549-34254-9..... | 85 | 619-26762-3..... | 81 |
| 504-30344-4..... | 91 | 549-34255-1..... | 83 | 619-26764-1..... | 81 |
| 504-30345-2..... | 53 | 549-34255-1..... | 85 | 619-26765-3..... | 81 |
| 504-30345-2..... | 69 | 600-26876-2..... | 13 | 619-26841-1..... | 91 |
| 504-30345-2..... | 71 | 600-26877-2..... | 13 | 619-26842-2..... | 91 |
| 508-108..... | 102 | 600-27464-2..... | 13 | 619-26844-1..... | 91 |
| 519-318 26-1..... | 83 | 603-41200-1..... | 75 | 619-26845-2..... | 91 |
| 519-318 26-1..... | 91 | 603-41200-2..... | 75 | 619-26846-1..... | 81 |
| 519-31661-1..... | 81 | 603-41200-3..... | 75 | 619-26847-2..... | 81 |
| 519-34643-1..... | 85 | 603-41200-4..... | 75 | 619-26848-1..... | 81 |
| 519-34643-1..... | 93 | 604-25102-1..... | 69 | 619-26849-3..... | 81 |
| 519-34643-2..... | 85 | 604-25103-1..... | 69 | 619-27121-1..... | 91 |
| 519-34643-2..... | 93 | 604-25105-2..... | 53 | 619-27122-1..... | 91 |
| 519-34643-3..... | 85 | 604-25108-2..... | 69 | 619-27471-1..... | 91 |
| 519-34643-3..... | 93 | 604-25109-2..... | 69 | 619-27472-1..... | 91 |
| 519-34643-4..... | 85 | 604-25111-3..... | 53 | 619-27473-1..... | 91 |
| 519-34643-4..... | 93 | 604-25128-2..... | 69 | 619-27474-1..... | 91 |
| 519-85224-1..... | 133 | 604-25130-3..... | 53 | 619-27475-1..... | 91 |
| 532-34839-2..... | 131 | 604-28766-1..... | 71 | 619-27476-1..... | 91 |
| 532-34839-3..... | 131 | 604-28767-1..... | 71 | 619-27477-1..... | 91 |
| 532-34839-5..... | 131 | 604-28768-1..... | 71 | 619-27478-1..... | 91 |
| 532-34839-6..... | 131 | 604-28769-1..... | 71 | 619-27613-1..... | 91 |
| 532-37731-1..... | 131 | 604-29967-1..... | 53 | 619-27614-1..... | 91 |
| 549-34254-1..... | 83 | 604-29968-1..... | 53 | 619-27615-1..... | 91 |
| 549-34254-1..... | 85 | 604-29969-1..... | 53 | 619-27616-1..... | 91 |
| 549-34254-2..... | 83 | 619-25730-2..... | 91 | 619-27792-1..... | 91 |
| 549-34254-2..... | 85 | 619-25731-2..... | 91 | 619-27793-1..... | 91 |
| 549-34254-3..... | 83 | 619-25754-4..... | 91 | 619-27796-1..... | 91 |
| 549-34254-3..... | 85 | 619-25755-4..... | 91 | 619-27797-1..... | 91 |
| 549-34254-4..... | 83 | 619-26396-2..... | 91 | 619-27800-1..... | 91 |
| 549-34254-4..... | 85 | 619-26398-2..... | 91 | 619-27801-1..... | 91 |
| 549-34254-5..... | 83 | 619-26473-1..... | 91 | 619-27804-1..... | 91 |
| 549-34254-5..... | 85 | 619-26474-3..... | 91 | 619-27805-1..... | 91 |
| 549-34254-6..... | 83 | 619-26646-2..... | 91 | 619-27824-1..... | 91 |
| 549-34254-6..... | 85 | 619-26648-2..... | 91 | 619-27825-1..... | 91 |

Index

| | | | | | |
|------------------|----|------------------|----|------------------|----|
| 619-27889-1..... | 91 | 619-29139-1..... | 91 | 619-77347-1..... | 91 |
| 619-27900-1..... | 91 | 619-29322-1..... | 91 | 619-77348-1..... | 91 |
| 619-28257-1..... | 91 | 619-29387-1..... | 91 | 619-77349-1..... | 91 |
| 619-28258-1..... | 91 | 619-29400-1..... | 91 | 619-77350-1..... | 91 |
| 619-28259-1..... | 91 | 619-29401-1..... | 91 | 619-77351-1..... | 91 |
| 619-28260-1..... | 91 | 619-29674-1..... | 91 | 619-77352-1..... | 91 |
| 619-28862-1..... | 91 | 619-29775-1..... | 91 | 619-77353-1..... | 91 |
| 619-28863-1..... | 91 | 619-29929-1..... | 91 | 619-77461-1..... | 91 |
| 619-28864-1..... | 91 | 619-29951-1..... | 91 | 619-77680-1..... | 91 |
| 619-28865-1..... | 91 | 619-29970-1..... | 91 | 619-77681-1..... | 91 |
| 619-28866-1..... | 91 | 619-29971-1..... | 91 | 619-77682-1..... | 91 |
| 619-28871-1..... | 91 | 619-29973-1..... | 91 | 619-77683-1..... | 91 |
| 619-28872-1..... | 91 | 619-29993-1..... | 91 | 619-77684-1..... | 91 |
| 619-28873-1..... | 91 | 619-29994-1..... | 91 | 619-77685-1..... | 91 |
| 619-28874-1..... | 91 | 619-37044-1..... | 81 | 619-77686-1..... | 91 |
| 619-28875-1..... | 91 | 619-37045-3..... | 81 | 619-77687-1..... | 91 |
| 619-28890-1..... | 91 | 619-37049-1..... | 81 | 619-77688-1..... | 91 |
| 619-28899-1..... | 91 | 619-37050-3..... | 81 | 619-77828-1..... | 91 |
| 619-28900-1..... | 91 | 619-77101-1..... | 91 | 619-77829-1..... | 91 |
| 619-28901-1..... | 91 | 619-77162-1..... | 93 | 619-77910-1..... | 91 |
| 619-28902-1..... | 91 | 619-77163-1..... | 93 | 624-29054-1..... | 13 |
| 619-28905-1..... | 91 | 619-77164-1..... | 93 | 624-29056-1..... | 13 |
| 619-28907-1..... | 91 | 619-77165-1..... | 93 | 649-29485-1..... | 83 |
| 619-28934-1..... | 91 | 619-77166-1..... | 93 | 649-29486-1..... | 83 |
| 619-28935-1..... | 91 | 619-77178-1..... | 91 | 649-29487-1..... | 83 |
| 619-28957-1..... | 91 | 619-77179-1..... | 91 | 649-29488-1..... | 83 |
| 619-28959-1..... | 91 | 619-77231-1..... | 93 | 649-29489-1..... | 83 |
| 619-29015-1..... | 91 | 619-77232-1..... | 93 | 649-29495-1..... | 83 |
| 619-29028-1..... | 91 | 619-77233-1..... | 93 | 649-29496-1..... | 83 |
| 619-29050-1..... | 91 | 619-77234-1..... | 93 | 649-29497-1..... | 83 |
| 619-29051-1..... | 91 | 619-77235-1..... | 93 | 649-29498-1..... | 83 |
| 619-29052-1..... | 91 | 619-77254-1..... | 91 | 649-29499-1..... | 83 |
| 619-29063-1..... | 91 | 619-77301-1..... | 91 | 649-29505-1..... | 83 |
| 619-29064-1..... | 91 | 619-77311-1..... | 93 | 649-29506-1..... | 83 |
| 619-29065-1..... | 91 | 619-77312-1..... | 93 | 649-29507-1..... | 83 |
| 619-29066-1..... | 91 | 619-77313-1..... | 93 | 649-29508-1..... | 83 |
| 619-29067-1..... | 91 | 619-77314-1..... | 93 | 649-29509-1..... | 83 |
| 619-29068-1..... | 91 | 619-77315-1..... | 93 | 649-29515-1..... | 83 |
| 619-29069-1..... | 91 | 619-77345-1..... | 91 | 649-29516-1..... | 83 |
| 619-29074-1..... | 91 | 619-77346-1..... | 91 | 649-29517-1..... | 83 |

Index

| | | | | | |
|-------------------|----|-------------------|----|-------------------|-----|
| 649-29518-1..... | 83 | 649-29603-1 | 83 | 649-77183-1..... | 83 |
| 649-29519-1..... | 83 | 649-29604-1 | 83 | 649-77184-1..... | 83 |
| 649-29525-1..... | 83 | 649-29605-1 | 83 | 649-77185-1..... | 83 |
| 649-29526-1..... | 83 | 649-29606-1 | 83 | 649-77186-1..... | 83 |
| 649-29527-1..... | 83 | 649-29611-1..... | 83 | 649-77187-1..... | 83 |
| 649-29528-1..... | 83 | 649-29612-1..... | 83 | 649-77188-1..... | 83 |
| 649-29529-1..... | 83 | 649-29613-1..... | 83 | 649-77394-1..... | 83 |
| 649-29535-1..... | 83 | 649-29614-1..... | 83 | 649-77395-1..... | 83 |
| 649-29536-1 | 83 | 649-29619-1..... | 83 | 649-77396-1..... | 83 |
| 649-29537-1..... | 83 | 649-29620-1 | 83 | 649-77397-1..... | 83 |
| 649-29538-1 | 83 | 649-29621-1..... | 83 | 649-77398-1..... | 83 |
| 649-29539-1 | 83 | 649-29622-1 | 83 | 649-77399-1..... | 83 |
| 649-29545-1..... | 83 | 649-29627-1..... | 83 | 649-77400-1..... | 83 |
| 649-29546-1..... | 83 | 649-29628-1 | 83 | 649-77401-1..... | 83 |
| 649-29547-1..... | 83 | 649-29629-1..... | 83 | 649-77402-1..... | 83 |
| 649-29548-1..... | 83 | 649-29630-1 | 83 | 649-77464-1..... | 85 |
| 649-29549-1..... | 83 | 649-29635-1 | 83 | 649-77466-1..... | 85 |
| 649-29555-1..... | 83 | 649-29636-1 | 83 | 649-77468-1..... | 85 |
| 649-29556-1..... | 83 | 649-29637-1..... | 83 | 649-77470-1..... | 85 |
| 649-29557-1..... | 83 | 649-29638-1 | 83 | 649-77472-1..... | 85 |
| 649-29558-1 | 83 | 649-29643-1..... | 83 | 649-77474-1 | 85 |
| 649-29559-1..... | 83 | 649-29644-1..... | 83 | 649-77475-1..... | 85 |
| 649-29565-1..... | 83 | 649-29645-1..... | 83 | 649-77476-1..... | 85 |
| 649-29566-1..... | 83 | 649-29646-1..... | 83 | 649-77477-1..... | 85 |
| 649-29567-1..... | 83 | 649-29651-1..... | 83 | 649-77478-1..... | 85 |
| 649-29568-1 | 83 | 649-29652-1..... | 83 | 649-77852-1..... | 83 |
| 649-29569-1..... | 83 | 649-29653-1 | 83 | 649-77853-1..... | 83 |
| 649-29575-1..... | 83 | 649-29654-1..... | 83 | 649-77854-1..... | 83 |
| 649-29576-1..... | 83 | 649-29659-1..... | 83 | 649-77855-1..... | 83 |
| 649-29577-1..... | 83 | 649-29660-1 | 83 | 649-77856-1..... | 83 |
| 649-29578-1..... | 83 | 649-29661-1..... | 83 | 649-77857-1..... | 83 |
| 649-29579-1..... | 83 | 649-29662-1 | 83 | 649-77858-1..... | 83 |
| 649-29587-1..... | 83 | 649-77167-1 | 85 | 649-77859-1..... | 83 |
| 649-29588-1 | 83 | 649-77168-1..... | 85 | 649-77860-1..... | 83 |
| 649-29589-1 | 83 | 649-77169-1..... | 85 | 655-28716-1..... | 13 |
| 649-29590-1 | 83 | 649-77170-1..... | 85 | 664-34135-7..... | 116 |
| 649-29595-1..... | 83 | 649-77171-1 | 85 | 857-760-002..... | 55 |
| 649-29596-1..... | 83 | 649-77180-1..... | 83 | 857-760-002..... | 65 |
| 649-29597-1..... | 83 | 649-77181-1..... | 83 | 857-760-002..... | 77 |
| 649-29598-1 | 83 | 649-77182-1..... | 83 | 857-760-007..... | 55 |

Index

| | | | | | |
|--------------------|-----|-----------------|-----|------------|-----|
| 857-760-007..... | 65 | 87026-15S | 109 | 87862..... | 67 |
| 857-760-007..... | 77 | 87026-15T..... | 109 | 87885..... | 107 |
| 917-006-101..... | 73 | 87030-3..... | 109 | 87886..... | 107 |
| 995-001-500 | 55 | 87030-4..... | 109 | 87887..... | 107 |
| 995-001-500 | 65 | 87030-6..... | 109 | 87888..... | 107 |
| 995-001-500 | 77 | 87200..... | 51 | 87889..... | 107 |
| 997-000-185 | 117 | 87202..... | 61 | 87895..... | 107 |
| 997-000-630 | 21 | 87204..... | 61 | 87896..... | 107 |
| 997-000-650 | 21 | 87212..... | 59 | 87897..... | 107 |
| 997-000-820 | 21 | 87214..... | 49 | 87905..... | 105 |
| 3515-07-2022 | 115 | 87216..... | 51 | 87905..... | 107 |
| 3515-07-6120..... | 115 | 87216..... | 51 | 87918..... | 105 |
| 3515-10-2021..... | 115 | 87218..... | 51 | 87918..... | 105 |
| 3515-10-6020 | 115 | 87218..... | 61 | 87918..... | 105 |
| 3515-10-6120..... | 115 | 87400..... | 51 | 87918..... | 105 |
| 3515-10-6320 | 115 | 87400..... | 61 | 87918..... | 105 |
| 3515-10-6620 | 115 | 87402..... | 49 | 87918..... | 105 |
| 3515-10-7620..... | 115 | 87402..... | 59 | 87919..... | 105 |
| 67359..... | 109 | 87403..... | 49 | 87919..... | 105 |
| 68645..... | 105 | 87403..... | 59 | 87919..... | 105 |
| 84239..... | 67 | 87405..... | 49 | 87919..... | 105 |
| 086500 | 114 | 87405..... | 59 | 87919..... | 105 |
| 086501 | 114 | 87406..... | 51 | 87919..... | 105 |
| 086502 | 114 | 87406..... | 61 | 87920..... | 105 |
| 086503 | 114 | 87413 | 51 | 87920..... | 105 |
| 086504 | 115 | 87413 | 61 | 87920..... | 105 |
| 086505 | 115 | 87416..... | 51 | 87920..... | 105 |
| 086506 | 115 | 87416..... | 61 | 87920..... | 105 |
| 086507..... | 115 | 87417 | 51 | 87920..... | 105 |
| 86535..... | 112 | 87417 | 61 | 87934..... | 105 |
| 87026-03S | 109 | 87418..... | 51 | 87934..... | 109 |
| 87026-03T | 109 | 87418..... | 61 | 87935..... | 105 |
| 87026-05S | 109 | 87419..... | 51 | 87935..... | 109 |
| 87026-05T | 109 | 87419..... | 61 | 87936..... | 105 |
| 87026-08S | 109 | 87421..... | 51 | 87936..... | 109 |
| 87026-08T | 109 | 87421..... | 61 | 87937..... | 105 |
| 87026-10S | 109 | 87423..... | 51 | 87937..... | 109 |
| 87026-10T | 109 | 87423..... | 61 | 87938..... | 105 |
| 87026-12S | 109 | 87823..... | 109 | 87938..... | 109 |
| 87026-12T..... | 109 | 87824..... | 109 | 87939..... | 105 |

Index

| | | | | | |
|----------------|-----|-------------|-----|-----------------------|-----|
| 87939..... | 109 | 250290..... | 105 | 882351..... | 105 |
| 87940..... | 105 | 250291..... | 105 | 882352..... | 105 |
| 87940..... | 109 | 250292..... | 105 | 882353..... | 105 |
| 87941..... | 105 | 250293..... | 105 | 882354..... | 105 |
| 87941..... | 109 | 250294..... | 105 | 882401..... | 105 |
| 87942..... | 105 | 250295..... | 105 | 882402..... | 105 |
| 87942..... | 109 | 876061..... | 107 | 882403..... | 105 |
| 87955..... | 107 | 876062..... | 107 | 882404..... | 105 |
| 87955..... | 107 | 876091..... | 107 | 1068645..... | 107 |
| 87955..... | 107 | 876092..... | 107 | 11500607..... | 122 |
| 87955..... | 107 | 876121..... | 107 | 11500610..... | 122 |
| 87955..... | 107 | 876122..... | 107 | 12371701..... | 57 |
| 87955..... | 107 | 876123..... | 107 | 12371702..... | 57 |
| 87956..... | 107 | 876124..... | 107 | 12375010..... | 45 |
| 87956..... | 107 | 876181..... | 107 | 12375050..... | 45 |
| 87956..... | 107 | 876182..... | 107 | 12375090..... | 45 |
| 87956..... | 107 | 876183..... | 107 | 12375130..... | 45 |
| 87956..... | 107 | 876184..... | 107 | 12375170..... | 45 |
| 87956..... | 107 | 876241..... | 107 | 12375210..... | 45 |
| 87957..... | 107 | 876242..... | 107 | 12380760..... | 125 |
| 87957..... | 107 | 876243..... | 107 | 12380765..... | 125 |
| 87957..... | 107 | 876244..... | 107 | 12381280..... | 45 |
| 87957..... | 107 | 882051..... | 105 | 12381285..... | 45 |
| 87957..... | 107 | 882052..... | 105 | 12381290..... | 45 |
| 87957..... | 107 | 882101..... | 105 | 12381292..... | 45 |
| 130067..... | 67 | 882102..... | 105 | 12381294..... | 45 |
| 130179..... | 51 | 882151..... | 105 | 12381296..... | 45 |
| 130179..... | 51 | 882152..... | 105 | 12381381..... | 57 |
| 130200DEE..... | 67 | 882201..... | 105 | 12381382..... | 57 |
| 130200GEE..... | 67 | 882202..... | 105 | 12381383..... | 57 |
| 130201BCC..... | 67 | 882203..... | 105 | 12381384..... | 57 |
| 130300GEE..... | 67 | 882204..... | 105 | 12381385..... | 57 |
| 130332..... | 67 | 882251..... | 105 | 12381386..... | 57 |
| 130335..... | 67 | 882252..... | 105 | 12381700..... | 57 |
| 236640..... | 107 | 882253..... | 105 | 12382666..... | 57 |
| 236641..... | 107 | 882254..... | 105 | 12501270..... | 125 |
| 236642..... | 107 | 882301..... | 105 | DIN908-R1-4-5.8..... | 102 |
| 236644..... | 107 | 882302..... | 105 | EWT2A01-S1-E+471..... | 135 |
| 236645..... | 107 | 882303..... | 105 | EWT2A01-S1-E+472..... | 135 |
| 236646..... | 107 | 882304..... | 105 | EWT2A04-S1-E+471..... | 135 |

Index

| | | | | | |
|--------------------|-----|-------------|----|---------------|-----|
| EWT2A04-S1-E+472 | 135 | PFP-23-2 | 55 | QLS 311 SSV | 9 |
| EXZT2A03-E+471 | 121 | PFP-23-22 | 55 | System video | 6 |
| EXZT2A03-E+472 | 121 | PF-VPBM-3-2 | 73 | VGEV 12380210 | 123 |
| EXZT2A06-E+471 | 121 | PF-VPBM-4-2 | 73 | VPKM-RV-S4 | 73 |
| EXZT2A06-E+472 | 121 | PF-VPBM-5-2 | 73 | VPKM-RV-VS | 73 |
| IG 502-2-E+912 | 117 | PF-VPBM-6-2 | 73 | | |
| IG 502-2-E+924 | 117 | PHU-5 | 63 | | |
| IGZ 51-20-E+471 | 121 | PHU-5-2.5 | 63 | | |
| IGZ 51-20-E+472 | 121 | PHU-5-2.5W | 63 | | |
| IGZ 51-20-S2-E+471 | 121 | PHU-5-5 | 63 | | |
| IGZ 51-20-S2-E+472 | 121 | PHU-5-5W | 63 | | |
| IGZ 51-20-S7-E+471 | 121 | PHU-35 | 63 | | |
| IGZ 51-20-S7-E+472 | 121 | PHU-35-2.5 | 63 | | |
| IGZ 51-20-S8-E+471 | 121 | PHU-35-2.5W | 63 | | |
| IGZ 51-20-S8-E+472 | 121 | PHU-35-5 | 63 | | |
| KFA1 912 | 21 | PHU-35-5W | 63 | | |
| KFA1 924 | 21 | PPU-5 | 47 | | |
| KFA1-M 924 | 21 | PPU-5-2.5 | 47 | | |
| KFA1-M-W 924 | 21 | PPU-5-2.5W | 47 | | |
| KFA1.U1 | 21 | PPU-5-5 | 47 | | |
| KFA1.U2 | 21 | PPU-5-5W | 47 | | |
| KFA1.U3 | 21 | PPU-35 | 47 | | |
| KFA1-W 912 | 21 | PPU-35-2.5 | 47 | | |
| KFA1-W 924 | 21 | PPU-35-2.5W | 47 | | |
| KFAS1 912 | 21 | PPU-35-5 | 47 | | |
| KFAS1 924 | 21 | PPU-35-5W | 47 | | |
| KFAS1-M 924 | 21 | PPU-BS60 | 47 | | |
| KFAS1-M-W 924 | 21 | PPU-BS60 | 63 | | |
| KFAS1-M-W-Z 924 | 21 | PPU-BS80 | 47 | | |
| KFAS1-M-Z 924 | 21 | PPU-BS80 | 63 | | |
| KFAS1-W 912 | 21 | PPU-BS100 | 47 | | |
| KFAS1-W 924 | 21 | PPU-BS100 | 63 | | |
| KFAS10 485 | 21 | PPU-BS120 | 47 | | |
| KFAS10-W 485 | 21 | PPU-BS120 | 63 | | |
| LRM2-E-00-100 | 127 | PPU-BS140 | 47 | | |
| MCLP | 11 | PPU-BS140 | 63 | | |
| PF-23-2 | 77 | PPU-BS160 | 47 | | |
| PF-23-22 | 77 | PPU-BS160 | 63 | | |
| PFH-23-2 | 65 | PPU-BS180 | 47 | | |
| PFH-23-22 | 65 | PPU-BS180 | 63 | | |

Notes



Important information on product usage

SKF and Lincoln lubrication systems or their components are not approved for use with gases, liquefied gases, pressurized gases in solution and fluids with a vapor pressure exceeding normal atmospheric pressure (1 013 mbar) by more than 0,5 bar at their maximum permissible temperature.



skf.com | skf.com/lubrication | lincolnindustrial.com

© SKF and LINCOLN are registered trademarks of the SKF Group.

© SKF Group 2019

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB LS/P1 16964 EN · April 2019

Certain image(s) used under license from Shutterstock.com